



MICRO SWITCH



FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

ASSEMBLY- PUSHBUTTON SWITCH

CATALOG LISTING

3 PB II

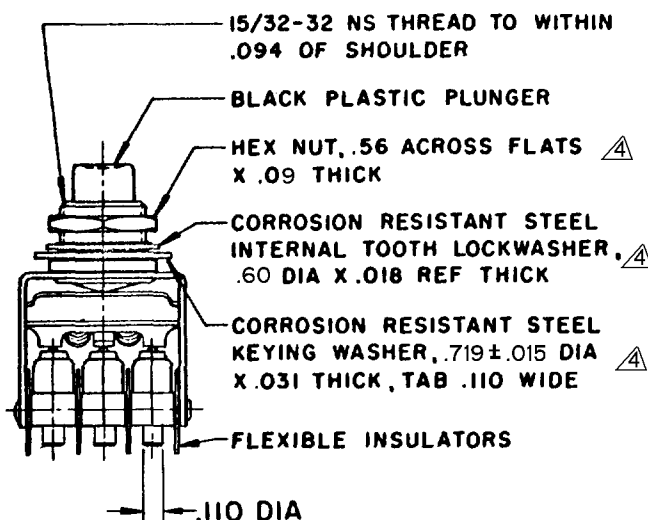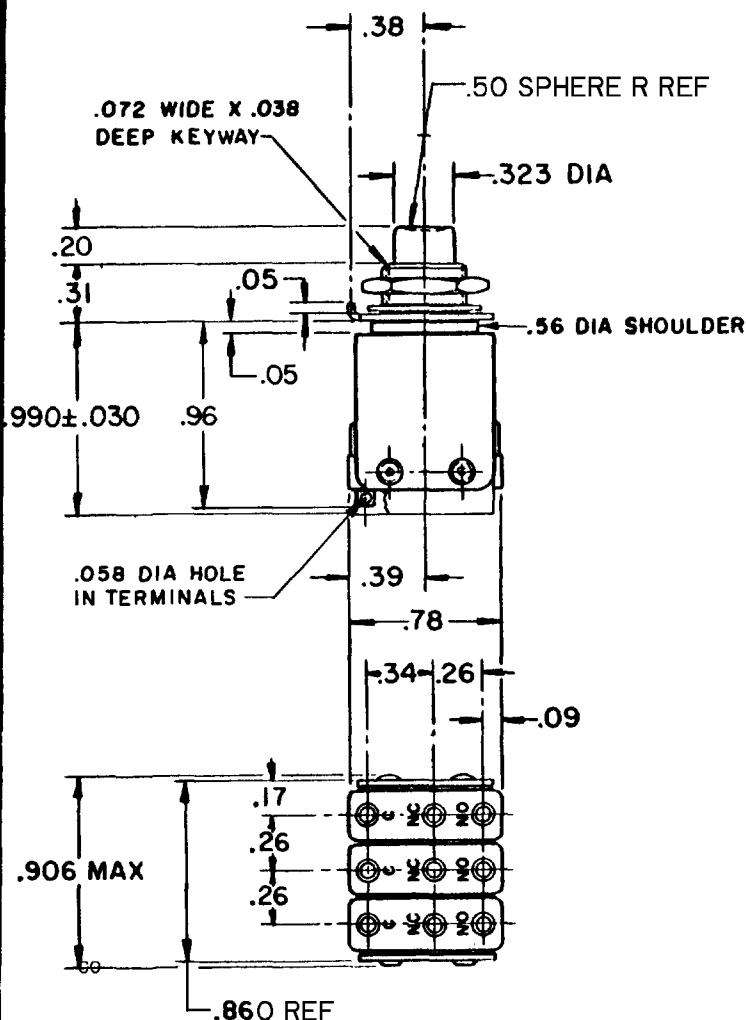

NOTES

- 1-UNIT INCLUDES "IISM" TYPE BASIC SWITCH (3)
- 2-TERMINALS ARE PLATED FOR SOLDERING
- 3-SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- △- MOUNTING HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ——— 35 OZ APPROX

TOTAL TRAVEL ——— .100 APPROX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (3)

250 VAC ——— 5 AMP

30 VOLTS DC RATING

INDUCTIVE ——— SEA LEVEL ——— 3 AMP

50,000 FT ——— 2.5 AMP

RESISTIVE ——— SEA LEVEL ——— 5 AMP

50,000 FT ——— 5 AMP

MAXIMUM INRUSH ——— 24 AMP

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

3PBII
PAGE 1 OF 1

M
DRAWING
NUMBER

ISSUE
12

REVISIONS

A	CO19800	H B W	17 FEB 85
B	CO-93593	P P F	27 OCT 98
C	CO-94273	G J W	15 APR 99
D	0018500	PM	23 FEB 06

CHECK

JAF 27 OCT 98

CHECK

LS D 21 FEB 65

CHECK

HBW 17 FEB 65

CHECK

REPLACES

FORMTEK

FO-50376

DRAWN