

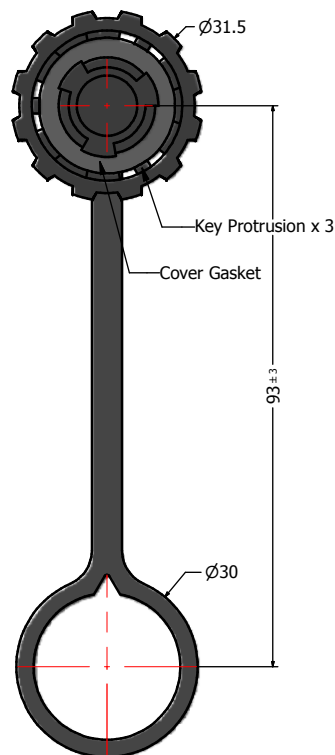
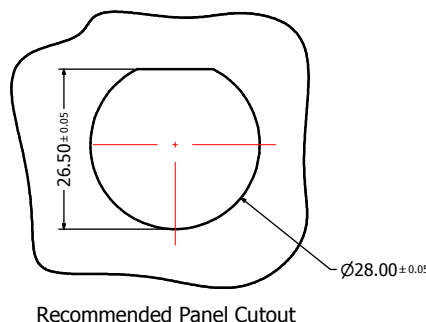





Protective Cover
Bayonet Locking Style
Plastic Version

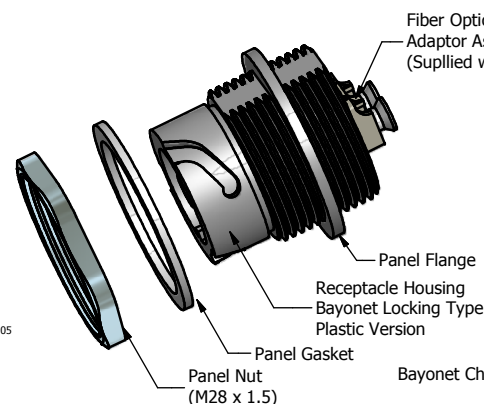

Recommended Panel Cutout

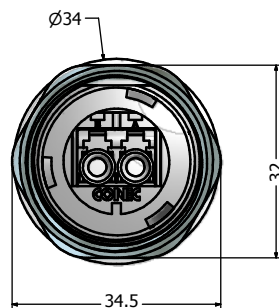

Fiber Optic Duplex LC
Adaptor Assembly
(Supplied with dust caps)



Notes:

- Material and Finish:
 - Receptacle Housing, Protective Cover: Polyester (Black); UL94 V-0
 - Panel Nut: Brass, Finish: Nickel Plated
 - Panel Gasket: Silicon, Color: White
 - Cover Gasket: Silicon, Color: White
 - Tether: Polycarbonate, Color: Black
- Duplex LC Adaptor Assembly:
 - Housing: Mod. PPO, UL94 V-0, Color: **SM Blue/MM Beige/APC SM Green**
 - Alignment Sleeves: SM Ceramic/MM Phosphor Bronze
 - Dust Cap: PP, Color: Neutral transparent
 - Operating Temperature: -40~C to +85~C
- Connector can be front or rear mounted to a maximum panel thickness of 3.2mm.
- IP67 rated when covered or fully mated with the appropriate mating connector

Directive 2002/95/EC RoHS Compliant

Description	Part Number
Plastic Duplex LC Single Mode Receptacle Assembly + Cover Assembly	17-300230
Plastic Duplex LC Multi Mode Receptacle Assembly + Cover Assembly	17-300240
Plastic Duplex LC APC Single Mode Receptacle Assembly + Cover Assembly	17-300250

Customer:			Tolerance Unless otherwise specified		Autodesk Inventor	Scale: 1.5:1	Dim. in mm
Name	Title	Approval Date	0 PLC	± 0.30			
			1 PLC	± 0.20			
			2 PLC	± 0.10			
			3 PLC	± 0.05			
			ANGLES	± 1°			
			2011	Date	Name	Material: See Notes	
			Draw.	Mar. 04	Vincent Ke		
			Appd.	Mar. 04	J. Chaudry	Title: IP67 Industrial Duplex LC Receptacle Assembly + Cover Assembly Plastic version	
						Drawing No.: 17K1A217	
						Part No.: SEE ABOVE TABLE	
						DIN A3	
						Sheet 1/1	

CONEC