


Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

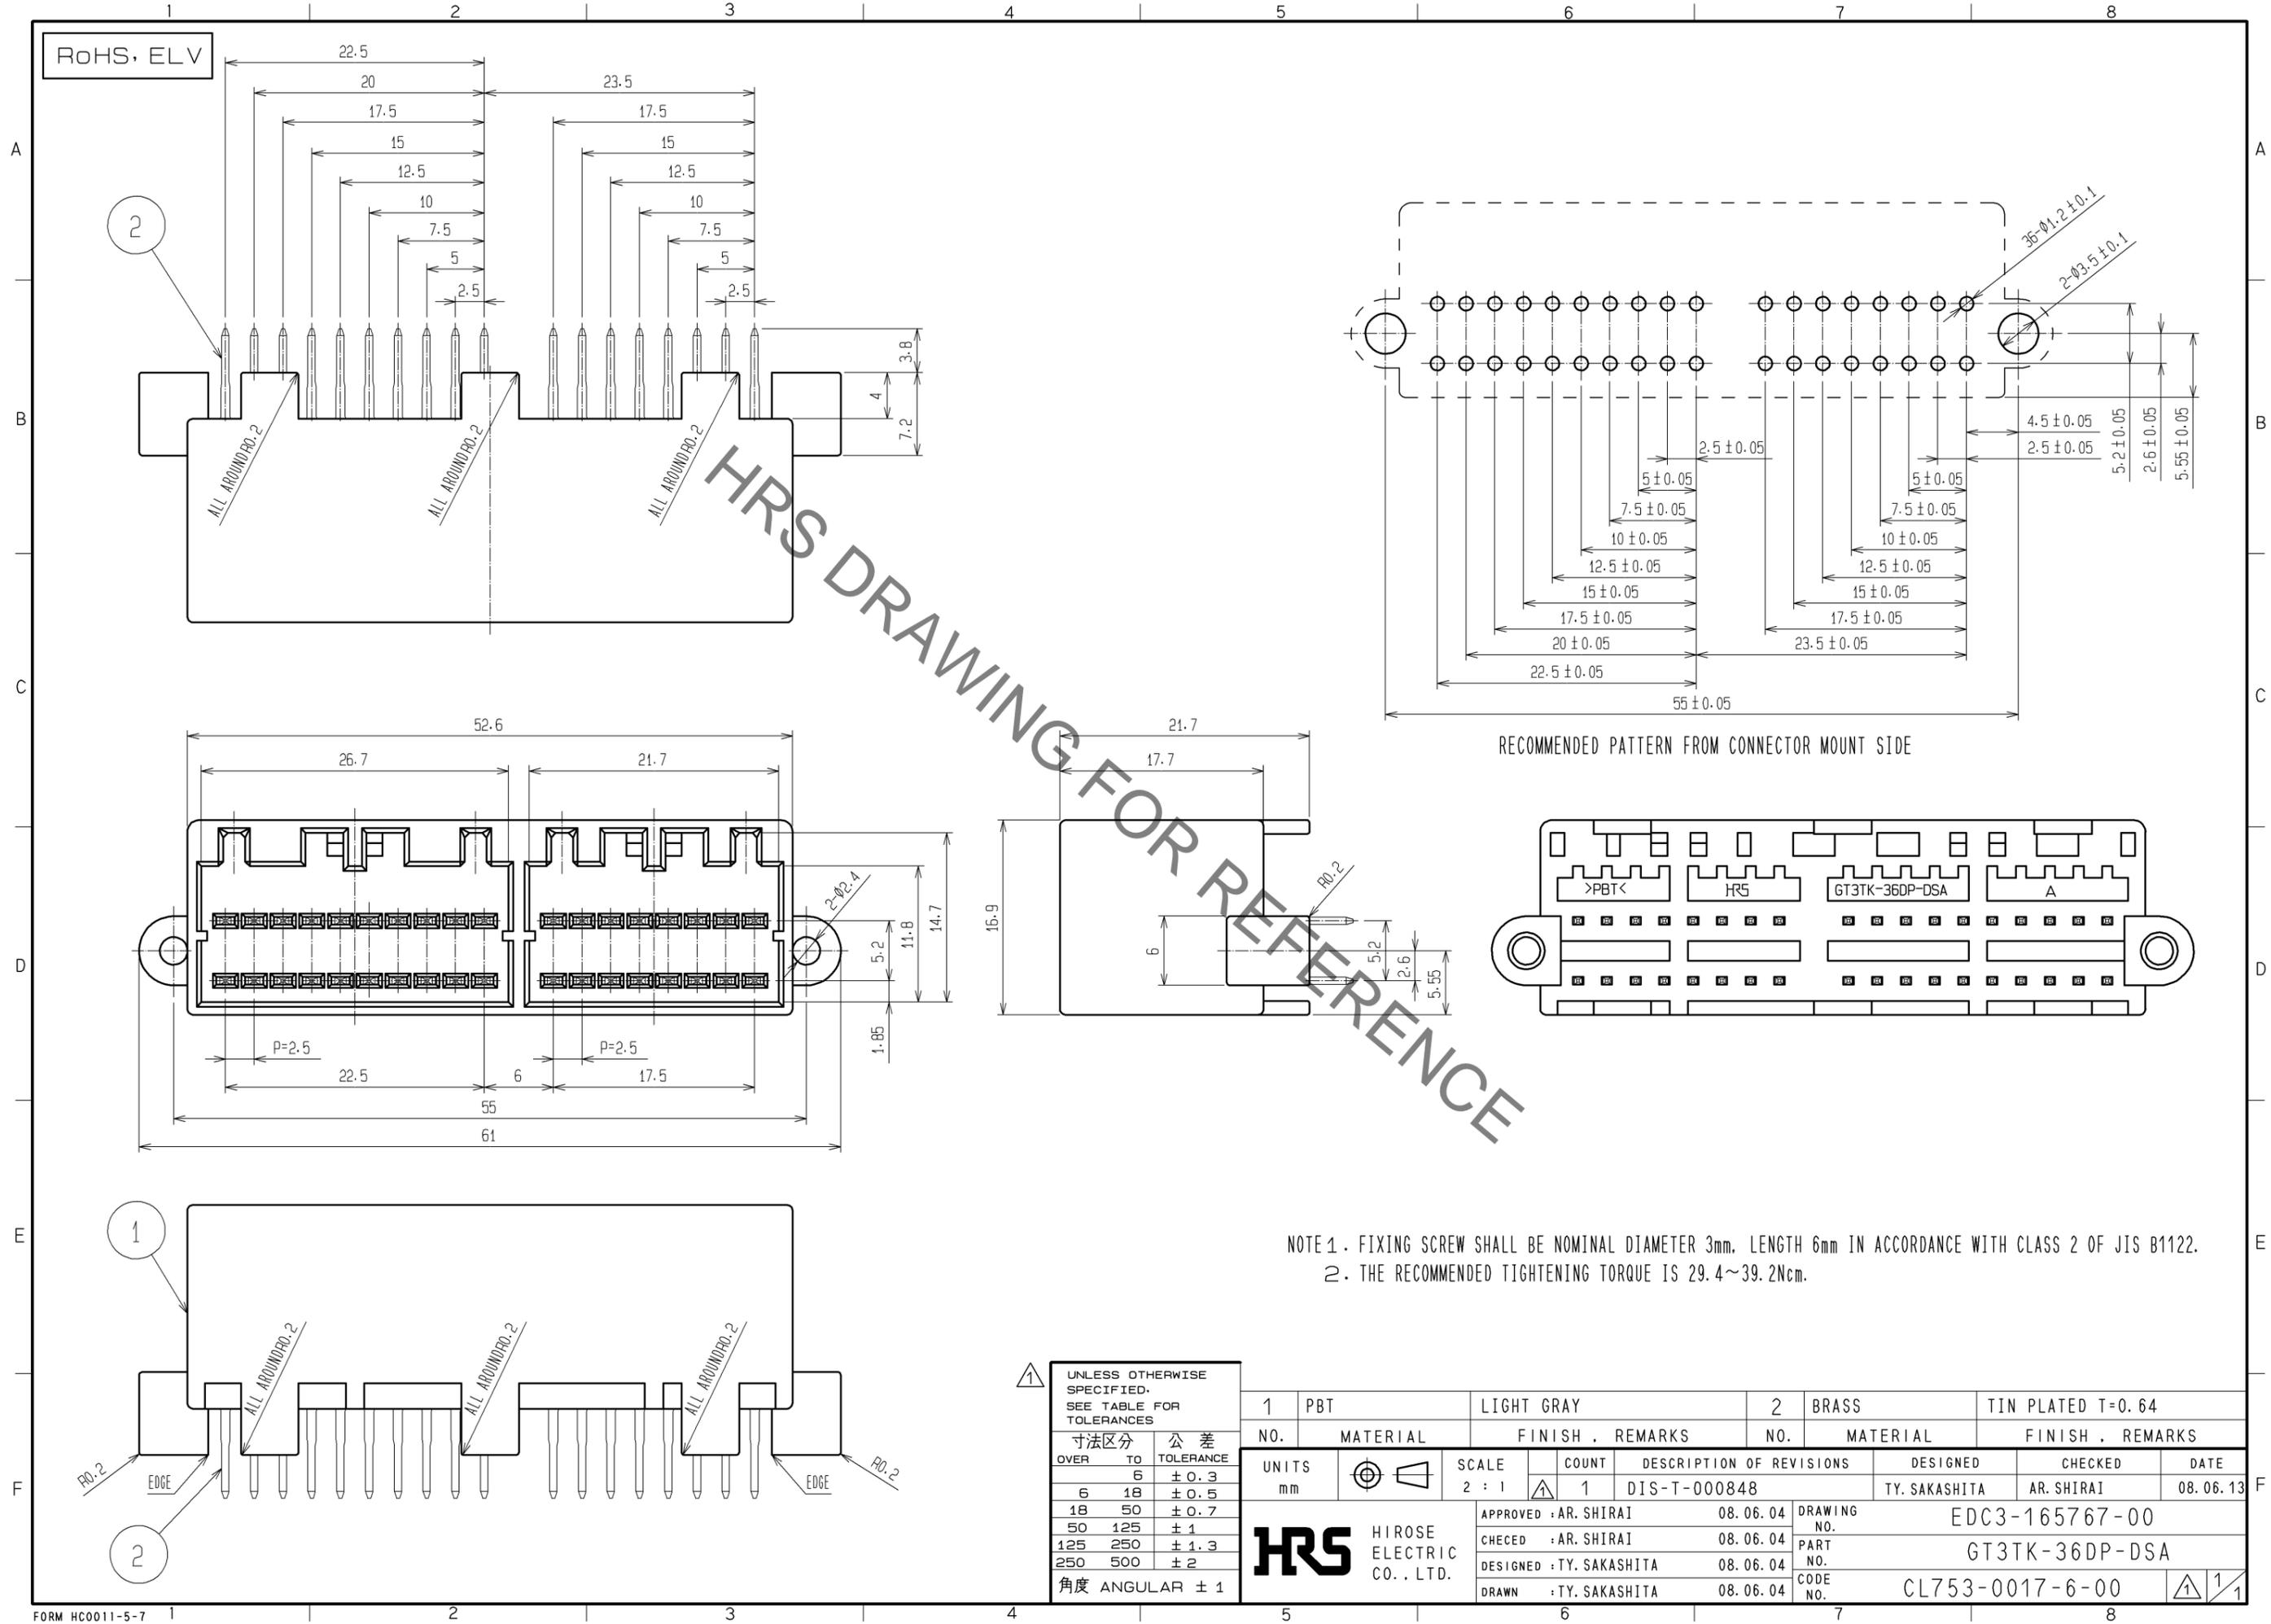

RoHS, ELV

ALL AROUND R0.2

HRS DRAWING FOR REFERENCE

RECOMMENDED PATTERN FROM CONNECTOR MOUNT SIDE

NOTE 1. FIXING SCREW SHALL BE NOMINAL DIAMETER 3mm. LENGTH 6mm IN ACCORDANCE WITH CLASS 2 OF JIS B1122.
 2. THE RECOMMENDED TIGHTENING TORQUE IS 29.4~39.2Ncm.

UNLESS OTHERWISE SPECIFIED, SEE TABLE FOR TOLERANCES

寸法区分	公差
OVER 6	±0.3
6 18	±0.5
18 50	±0.7
50 125	±1
125 250	±1.3
250 500	±2
角度 ANGULAR	±1

1	PBT	LIGHT GRAY	2	BRASS	TIN PLATED T=0.64		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
UNITS	mm	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		2 : 1	1	DIS-T-000848	TY. SAKASHITA	AR. SHIRAI	08.06.13
APPROVED : AR. SHIRAI				08.06.04		DRAWING NO. EDC3-165767-00	
CHECKED : AR. SHIRAI				08.06.04		PART NO. GT3TK-36DP-DSA	
DESIGNED : TY. SAKASHITA				08.06.04		CODE NO. CL753-0017-6-00	
DRAWN : TY. SAKASHITA				08.06.04			