


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	COPPER CONDUCTOR SIZE	EXPANDED WIRE RANGE **	BARREL		OVERALL LENGTH "A" ±.06	WIRE STRIP LENGTH	PANDUIT CRIMP TOOL PART NUMBERS					
			I.D. ±.01	O.D. ±.01			CT-700 (OBSOLETE)	CT-1700	CT-720	CT-920/CT-920CH CT-930/CT-930CH CT-940CH CT-2920/CT-2940	CT-980 CT-980CH CT-2950 CT-2980	CT-2001
							DIE PART NO./ DIE SET COLOR & INDEX NO./ NUMBER OF CRIMPS					
SCH6-L	#6 AWG or 30 NAVY	----	0.22	0.31	1.97	15/16	CD-700-8-2 BLUE P24 3 CRIMPS	BLUE P24 3 CRIMPS	CD-720-1 BLUE P24 2 CRIMPS	CD-920-6 BLUE P24 1 CRIMP	----	CD-2001-6 BLUE P24 2 CRIMPS
SCH4-L	#4 AWG or 40-50 NAVY	----	0.28	0.38	1.97	15/16	CD-700-8-2 GRAY P29 3 CRIMPS	GRAY P29 3 CRIMPS	CD-720-1 GRAY P29 2 CRIMPS	CD-920-4 GRAY P29 1 CRIMP	STD 1 CRIMP	CD-2001-4 GRAY P29 2 CRIMPS
SCH2-Q	#2 AWG or 60 NAVY	#6-#2 STR AWG	0.31	0.42	2.13	1	CD-700-8-2 BROWN P33 3 CRIMPS	BROWN P33 3 CRIMPS	CD-720-1 BROWN P33 2 CRIMPS	CD-920-2 BROWN P33 1 CRIMP	STD 1 CRIMP	CD-2001-2 BROWN P33 2 CRIMPS
SCH1-E	#1 AWG or 75 NAVY	#6-#1 STR AWG	0.36	0.47	2.13	1	CD-700-1-1/0 GREEN P37 3 CRIMPS	GREEN P37 3 CRIMPS	CD-720-2 GREEN P37 2 CRIMPS	CD-920-1 GREEN P37 1 CRIMP	STD 2 CRIMPS	CD-2001-1 GREEN P37 2 CRIMPS
SCH1/0-X	1/0 AWG or 100 NAVY	#6-#1/0 STR AWG	0.39	0.52	2.13	1	CD-700-1-1/0 PINK P42 3 CRIMPS	----	CD-720-2 PINK P42 2 CRIMPS	CD-920-1/0 PINK P42 1 CRIMP	STD 2 CRIMPS	CD-2001-1/0 PINK P42 2 CRIMPS
SCH2/0-X	2/0 AWG or 125 NAVY	#4-#2/0 STR AWG	0.45	0.58	2.28	1-1/16	----	----	CD-720-2 BLACK P45 2 CRIMPS	CD-920-2/0 BLACK P45 1 CRIMP	STD 2 CRIMPS	CD-2001-2/0 BLACK P45 2 CRIMPS
SCH3/0-X	3/0 AWG or 150 NAVY	#2-#3/0 STR AWG	0.51	0.64	2.47	1-3/16	----	----	CD-720-2 ORANGE P50 2 CRIMPS	CD-920-3/0 ORANGE P50 1 CRIMP	STD 2 CRIMPS	CD-2001-3/0 ORANGE P50 2 CRIMPS
SCH4/0-X	4/0 AWG or 200 NAVY	#1-#4/0 STR AWG	0.57	0.71	2.54	1-3/16	----	----	CD-720-3 PURPLE P54 2 CRIMPS	CD-920-4/0 PURPLE P54 1 CRIMP	STD 2 CRIMPS	CD-2001-4/0 PURPLE P54 2 CRIMPS
SCH250-X	250 MCM 250 NAVY	#1/0-250 MCM	0.63	0.77	2.63	1-1/4	----	----	CD-720-3 YELLOW P62 2 CRIMPS	CD-920-250 YELLOW P62 1 CRIMP	STD 2 CRIMPS	CD-2001-250 YELLOW P62 2 CRIMPS

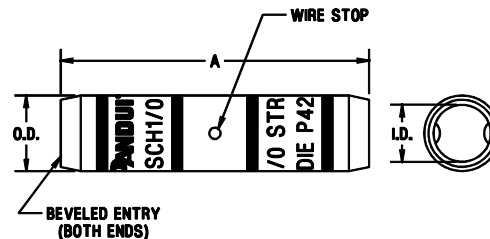

NOTES:

MATERIAL - HIGH CONDUCTIVITY
SEAMLESS COPPER TUBING.

ELECTRO-TIN PLATED.

SPLICE MARKED WITH DIE SET
COLOR AND INDEX NUMBER.

UL LISTED WITH CODE COPPER CONDUCTORS
FOR APPLICATIONS UP TO 35KV, FILE E52164

CONSULT CABLE MANUFACTURER FOR VOLTAGE
STRESS RELIEF INSTRUCTIONS WITH
APPLICATIONS GREATER THAN 2000 VOLTS

CSA CERTIFIED FOR APPLICATIONS UP TO
600V, FILE LR31212

FOR USE WITH COPPER CABLES ONLY



LISTED
587H
E52164



CERTIFIED
LR31212

*CD-920 DIES CAN BE USED WITH CT-940CH AND
CT-2940 TOOLS WITH CD-940-DA DIE ADAPTER

** WITH CT-980, CT-980CH, CT2950
& CT-2980 TOOLS

C41064_03

03	4/01	KMD		ADDED LETTER "P" TO DIE NO. REMOVED ALTERNATE DIE INDEX NO. ADDED CT-2940 AND ADAPTER NOTE. ADDED UL & CSA LOGOS											
02	1/93	WL	GRM	ADDED TOLERANCES AND CT-980/ CT-980CH				01369	RJM	RS					
01	12/92	WL	GRM	ADDED CT-2001				01307	RJM	RS					
00	5/92	WL	GRM	RELEASED				00980		RS					
REV	DATE	BY	CHK	DESCRIPTION				ECN	PM	CUST					

PANDUIT CORP. TINLEY PARK, ILLINOIS

SCH HIGH VOLTAGE - STANDARD BARREL
#6 THRU 250 COPPER SPLICES

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
1.X1 ± 1.30X1 ±
1.XX1 ± ANGLES ±

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN IN
INCHES, THIRD ANGLE PROJECTION

DRAWN BY WL

DATE 5-12-92

CHK'D GRM

SEE
NOTES
ABOVE

SCALE N/A

DRAWING NO.

C41064

DWG

B

SIZE