

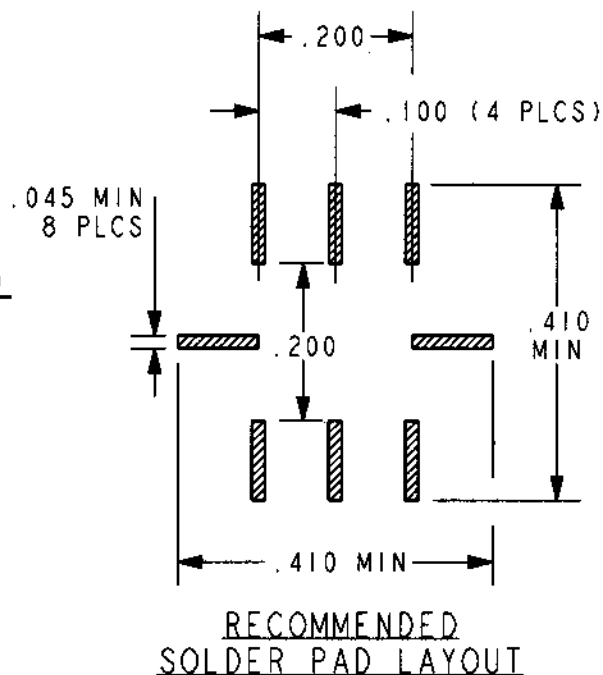
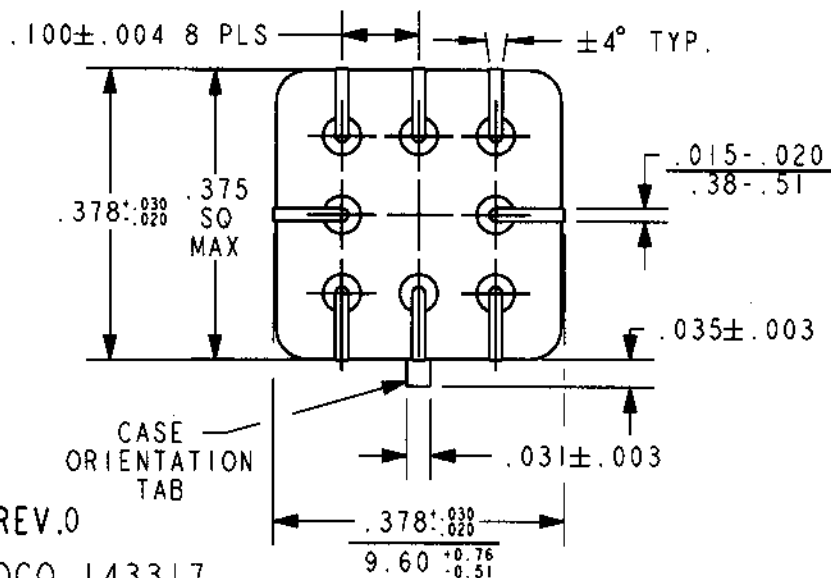


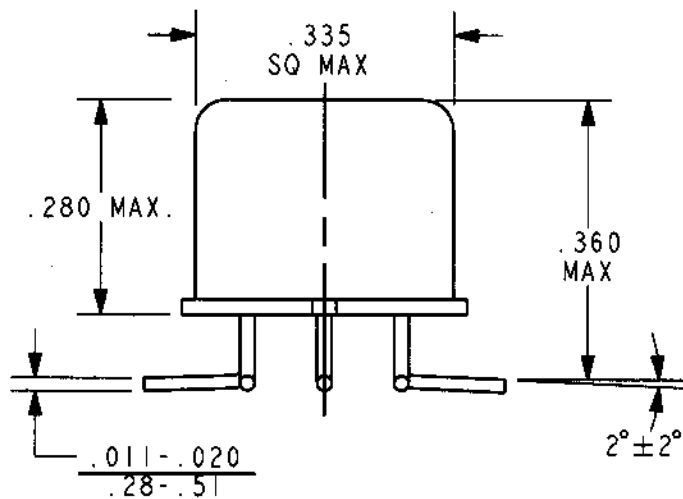

COIL: @ 25°C
 RESISTANCE 400 OHMS ±10%
 NOMINAL VOLTAGE 12.0 VDC
 MUST OPERATE 9.0 VDC
 MUST RELEASE

ENVIRONMENT:
 VIBRATION 10 CPS TO 500 CPS @ 10 g's
 SHOCK 30 g's 6±1 MS. DURATION
 TEMPERATURE -55 °C TO +85 °C
 NOTES: OPERATE TIME 4.0 MS MAX.
 RELEASE TIME 6.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 1 AMP 28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 11/19/01 CK. TLG 11-20-01

CII Technologies
 advanced control electronic solutions

CUST. CII
 CUST. NO. STANDARD REV. ---

"SMGAD" RELAY

SHCD-12