
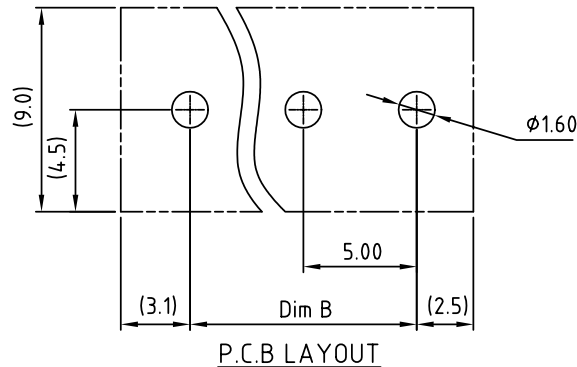
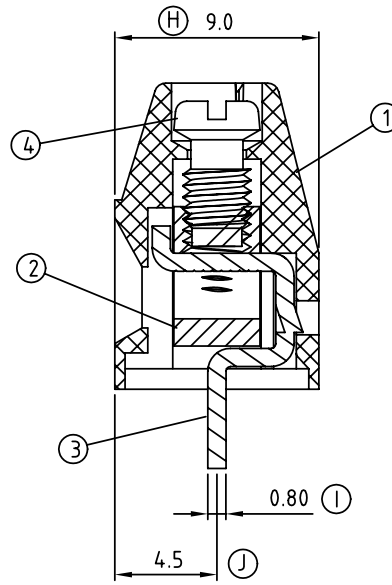
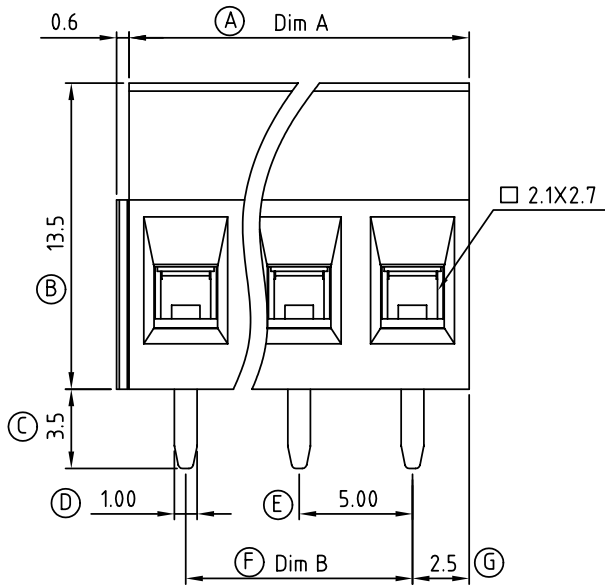


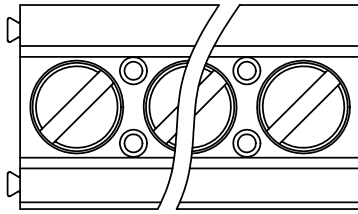

N = Number of poles  
Dim A = N x 5.0  
Dim B = (N - 1) x 5.0

|        | Dim A      | Dim B      |
|--------|------------|------------|
| 2-6p   | $\pm 0.15$ | $\pm 0.10$ |
| 7-12p  | $\pm 0.20$ | $\pm 0.20$ |
| 13-18p | $\pm 0.30$ | $\pm 0.25$ |
| 19-24p | $\pm 0.40$ | $\pm 0.30$ |

| SIGN                                           | DATE     | DESCRIPTION                                     | APPROVER |
|------------------------------------------------|----------|-------------------------------------------------|----------|
| △                                              | 8/07'06  | Added FIMKO standard                            | 梁仁松      |
| △                                              | 01/18'07 | Soldering temperature changed from 245° to 250° | Tason    |
| △                                              | 01/18'07 | Part NO is Changed                              | Tason    |
| THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!! |          |                                                 |          |

#### Material:

- Item 1 Terminal housing :Thermoplastic (UL 94V-0)
- Item 2 Clamp : Brass ,Ni plated
- Item 3 Wire guard solder pin : Brass ,Tin plated
- Item 4 Terminal screw: Steel Zinc plating"- "slot type

#### △ Electrical cULus/FIMKO

- Voltage rating: 300VAC/300VAC
- Current rating: 16A/17.5A
- Wire range: 0.5 ~ 1.5mm<sup>2</sup>
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Torque: 3.5Lb-In./0.5Nm
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:

#### △ VI xx 01 x 2 xxxx G

02 2 CONTACTS  
03 3 CONTACTS  
...  
24 24 CONTACTS

0 Black  
5 Green  
6 Blue  
8 Grey

0000:"@ "Logo (Standard ) Pb < 40,000ppm (RoHS)  
000A:"ANYTEK"Logo  
Any special item by customer request, please contact sales department.

# ANYTEK

## CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

|          |                                               |                   |                   |                                                                                       |              |  |            |
|----------|-----------------------------------------------|-------------------|-------------------|---------------------------------------------------------------------------------------|--------------|--|------------|
| TITLE    | VI 5.0 SERIES 180° wire inlet (without cover) |                   |                   |                                                                                       |              |  |            |
| PART NO. | VIxx01x2xxxxG                                 |                   |                   | DWG NO.                                                                               | 8VI0003      |  |            |
| APPROVED | CHECKED                                       | DESIGNED          | DRAWN             | CUST NO.                                                                              |              |  | Tolerance  |
|          |                                               | 熊海燕<br>2007.01.18 | 熊海燕<br>2007.01.18 |  | UNIT: mm     |  | X. ±0.50   |
|          |                                               |                   |                   |                                                                                       | SCALE: NONE  |  | X.X ±0.30  |
|          |                                               |                   |                   |                                                                                       | SHEET: 01/01 |  | X.XX ±0.10 |
|          |                                               |                   |                   |                                                                                       | REV.: F      |  | X° ±1°     |