

SIGN	DATE	DESCRIPTION	APPROVER
△	8/07'06	Added FIMKO standard	梁仁松
△	01/18'07	Soldering temperature changed from 245° to 250°	Tason
△	01/18'07	Part NO is Changed	Tason
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material:

- Item 1 Terminal housing :Thermoplastic (UL 94V-0)
- Item 2 Clamp : Brass ,Ni plated
- Item 3 Wire guard solder pin : Brass ,Tin plated
- Item 4 Terminal screw: Steel Zinc plating"-“slot type

△ Electrical cULus/FIMKO

- Voltage rating: 300VAC/300VAC
- Current rating: 16A/17.5A
- Wire range: 0.5 ~ 1.5mm²
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Torque: 3.5Lb-In./0.5Nm
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 





△ VI xx 01 x 2 xxxx G

02 2 CONTACTS
03 3 CONTACTS
...
24 24 CONTACTS

0 Black
5 Green
6 Blue
8 Grey

0000:"@“Logo (Standard) Pb < 40,000ppm
000A:"ANYTEK“Logo (RoHS)
Any special item by
customer request,
please contact sales
department.

ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE	VI 5.0 SERIES 180° wire inlet (without cover)						
PART NO.	VIxx01x2xxxxG			DWG NO.	8VI0003		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		熊海燕 2007.01.18	熊海燕 2007.01.18		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
					REV.: F		X.XX ±0.10
5				6		7	
				SHEET: 01/01		X° ±1°	

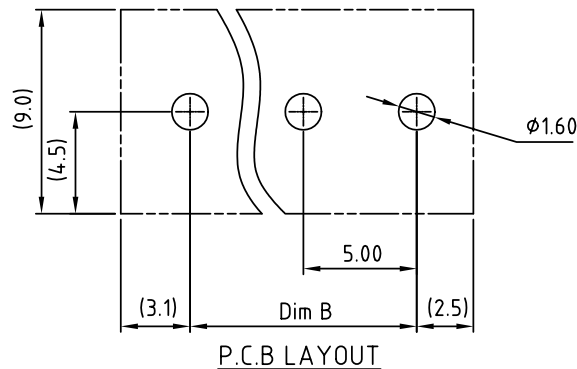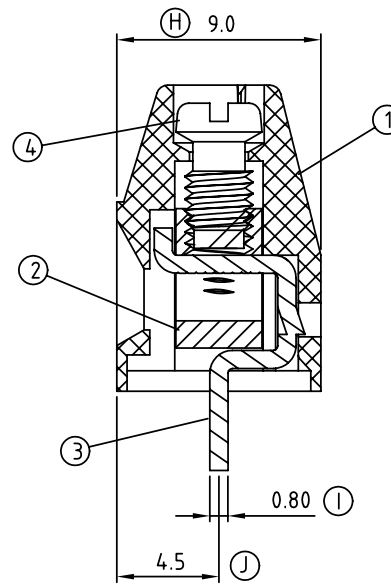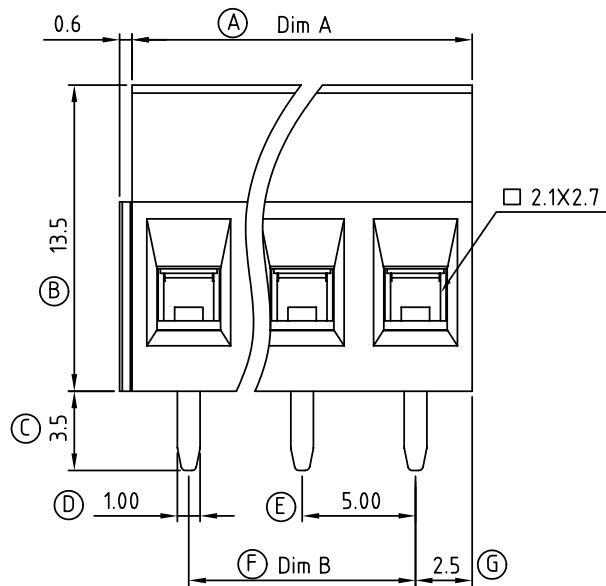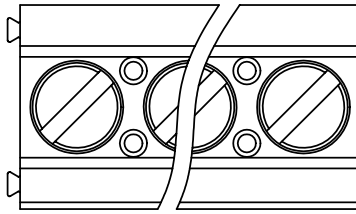

N = Number of poles
Dim A=Nx5.0
Dim B=(N-1)x5.0

	Dim A	Dim B
2-6p	±0.15	±0.10
7-12p	±0.20	±0.20
13-18p	±0.30	±0.25
19-24p	±0.40	±0.30