


PART NUMBER	LENGTH		ITEM ①		ITEM ②	
	INCH	mm	UMC RIGHT ANGLE PLUG CONNECTOR, MEDIUM PROFILE		CABLE	
415-0088-050	1.97±.16	50±4	BODY - COPPER ALLOY - GOLD PLATED CONTACT - COPPER ALLOY - GOLD PLATED INSULATOR - PBT - BLACK OR NATURAL WHITE, UL94V-0		SHIELD - TIN PLATED ANNEALED COPPER WIRE	
415-0088-083	3.27±.16	83±4			DIELECTRIC - FEP	
415-0088-100	3.94±.16	100±4			CENTER CONDUCTOR - SILVER PLATED ANNEALED COPPER WIRE, AWG#30 (7/.004)	
415-0088-150	5.91±.16	150±4				
415-0088-200	7.87±.16	200±4			JACKET - FEP - BLACK	
415-0088-250	9.84±.31	250±8				
415-0088-300	11.81±.31	300±8				
415-0088-500	19.69±.31	500±8				
415-0088-1220	48.03±.71	1220±18				

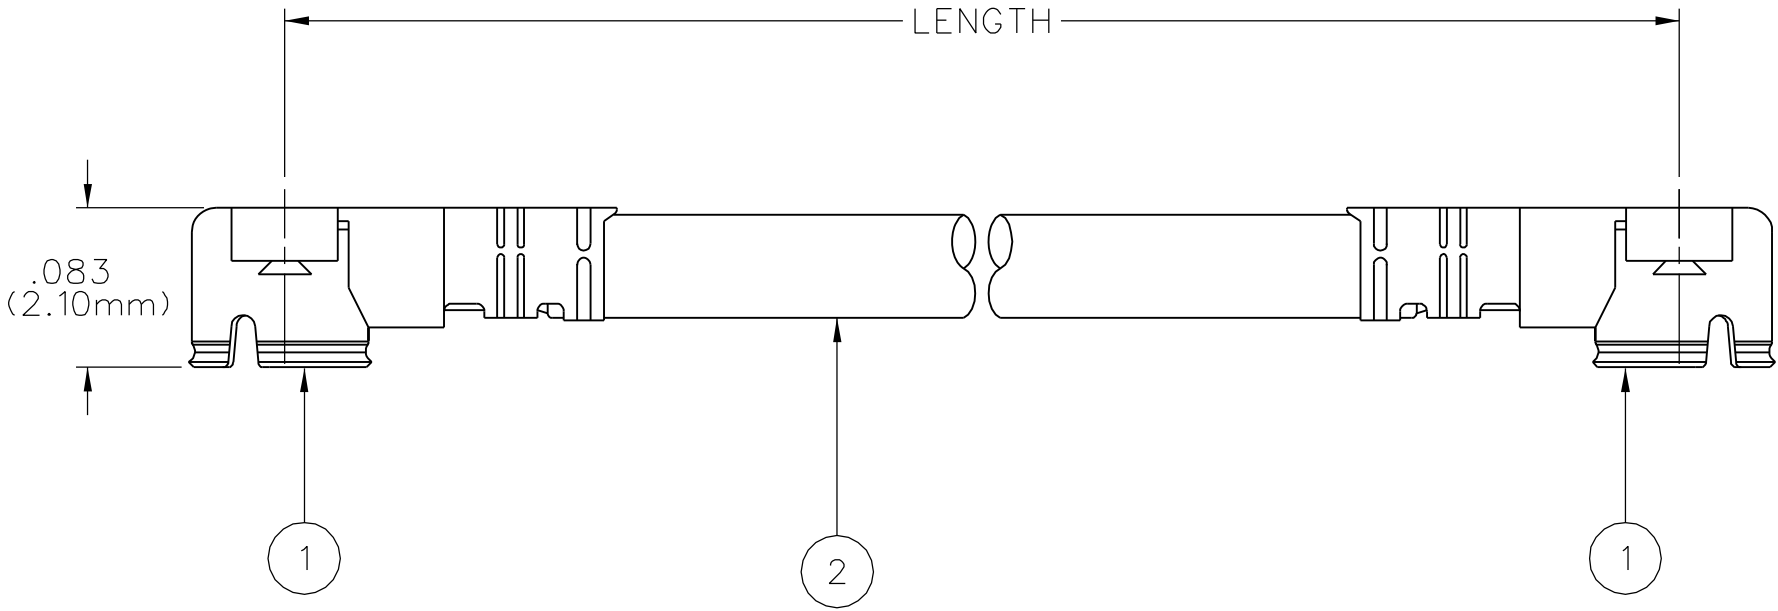

NOTES:

1. SPECIFICATIONS:

IMPEDANCE: 50 OHMS
FREQUENCY RANGE: 0-6 GHz
VSWR: 1.30 MAX AT 0-3 GHz
1.50 MAX AT 3-6 GHz

WITHSTANDING VOLTAGE: 200 V AC
INSULATION RESISTANCE: 500 MEGOHM MIN
CONTACT RESISTANCE:
CENTER CONTACT - 20 MILLI-OHMS MAX
OUTER CONDUCTOR - 20 MILLI-OHMS MAX

MECHANICAL:

COMPATIBILITY: MATES WITH U.FL SERIES
HOLDING FORCE (MIN): 0.15 N (FEMALE CONTACT)
DURABILITY: 30 CYCLES

ENVIRONMENTAL:

TEMPERATURE RANGE: -40° C TO +90° C

DRAWING NO.									
B - 415-0088-001/XXXX									
0		REVISIONS							
JACKET - FEP - BLACK WAS WHITE									

* REVISION NUMBER FOLLOWED BY AN ALPHA *									
* CHARACTER INDICATES DRAWING CLARIFI-									
* CATION OR PART NUMBER ADDITION ONLY. *									

1b		3-26-07		P A T	S B D	R J B	M J U	J C N	4-23-07 ECN 50953
ADDED P/N: 415-0088-083,BODY- COPPER ALLOY WAS PHOSPHOR BRONZE, CONTACT- COPPER ALLOY WAS BRASS, INSULATOR- PBT- NATURAL WAS LCP- WHITE									

* REVISION NUMBER FOLLOWED BY AN ALPHA *									
* CHARACTER INDICATES DRAWING CLARIFI-									
* CATION OR PART NUMBER ADDITION ONLY. *									

1c		1-21-08		P A T	R J B	M J U	R B	J C N	1-25-08 ECN 51347
ADD MEDIUM PROFILE TO ITEM 1 BLOCK CHANGE INSULATOR COLOR TO NATURAL WHIT CHANGE SHIELD MATERIAL TO TIN PLATED CHANGE CONNECTOR HEIGHT TO .083									
1d		2-7-11		M S	S D J	R J B	M S		2-7-11 ECO 52915
ADDED: BLACK. DELETED VENDOR REFERENCE +/- .006 WAS +/- .004									
2		10-3-12		M S	R J B	M J U			10-17-12 ECO 54381
ADDED P/N 415-0088-1220									
3		11-26-12		M S	R J B	S J	M J U		10-27-12 ECO 54479

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED
PER ASME Y 14.5M - 1994

"μSTATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY PAT	DATE 5-23-06	 cinch CONNECTIVITY SOLUTIONS a bel group	Cinch Connectivity Solutions P.O. Box 1732 Waseca, MN 56093 1-800-247-8256	
DECIMALS .XX	mm ±0.15	CHECKED BY RJB	DATE 12-13-06		TITLE UMC MATING CABLE PLUG .098 (2.5mm) MATING HEIGHT .054 (1.37mm) CABLE O.D.	
.XXX ±.006		APPROVED BY PDW	DATE 12-20-06			
MATL		RELEASE DATE 12-20-06		SHEET 2 OF 2	DRAWING NO. B - 415-0088-001/XXXX	
FINISH		U/M	INCH			SCALE 10:1