


NOTES:

1. HARDWARE IS INCLUDED.
2. PART HAS A SECURED FERRITE.

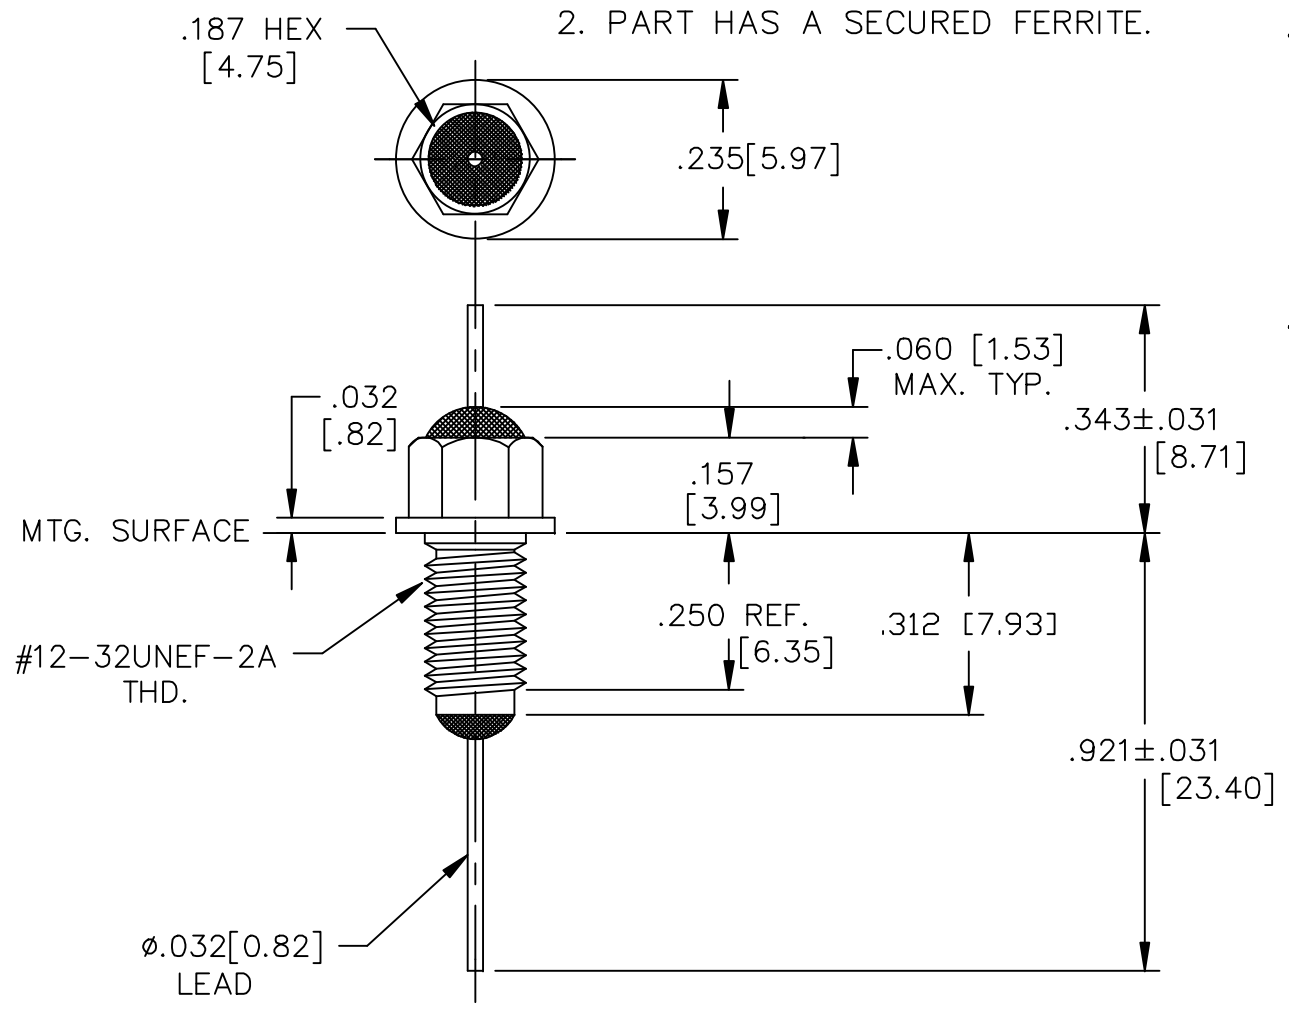

LEAD FINISH: SOLDER	
BUSHING FINISH: SILVER	
25 CAPACITANCE	1500pF min./4600pF max.
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	125°C 140VRMS 125°C 200VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
25 FREQ. MHz	I.L. (db)
50	16
100	30
200	48
500	70
1 GHz	70
10 GHz	70
SCHEMATIC	

MARKING:

PART: 19202 11750801-2
 BAG: 19202 11750801-2
 DLSP2
 DATE CODE
 200VDC 140VRMS
 125°C
 QTY./BAG (100 MAX.)
 P.D. NO.
 PACKAGE: SAME AS BAG.
 NOTE: A COPY OF THE GROUP A TEST PLAN MUST ACCOMPANY THE SHIPMENT.

	25	24	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED
	CN 61385-ENG	CN 184964	CHANGE NOTICE	Fractions ± 1/64
		REDRAWN		Dec. .xx±
				Dec. .xxx±.010
				Angles ±0° 30'
				CODE IDENT. NO. DLSP2

SPECTRUM CONTROL INC.

FAIRVIEW PENNSYLVANIA	
Dwn. KAUFFMAN	Description Pi
Ckd. 11-7-11	RESIN SEAL FILTER
Apvd.	51-714-076
Scale NONE	