
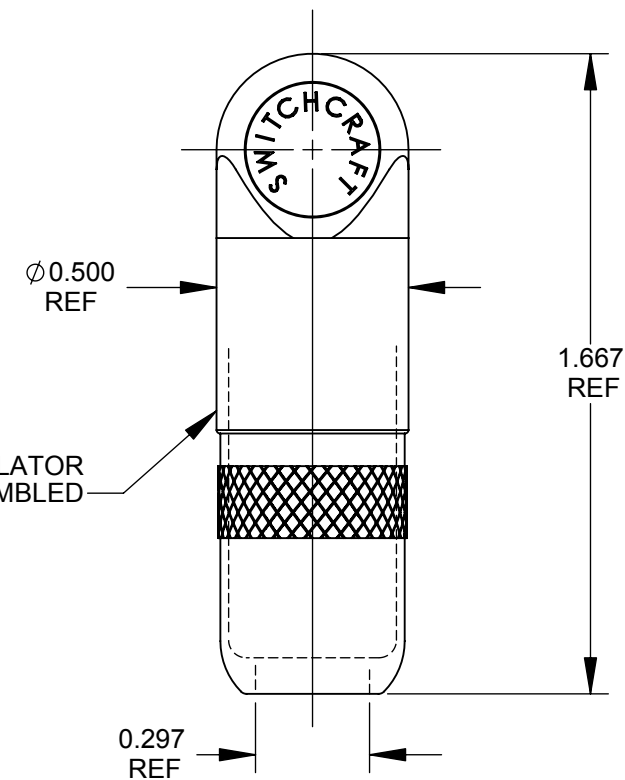
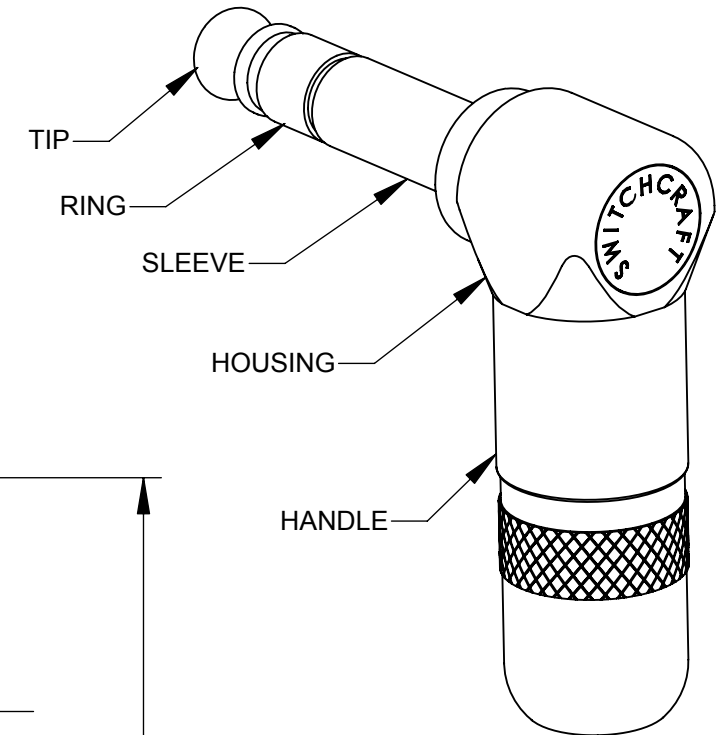
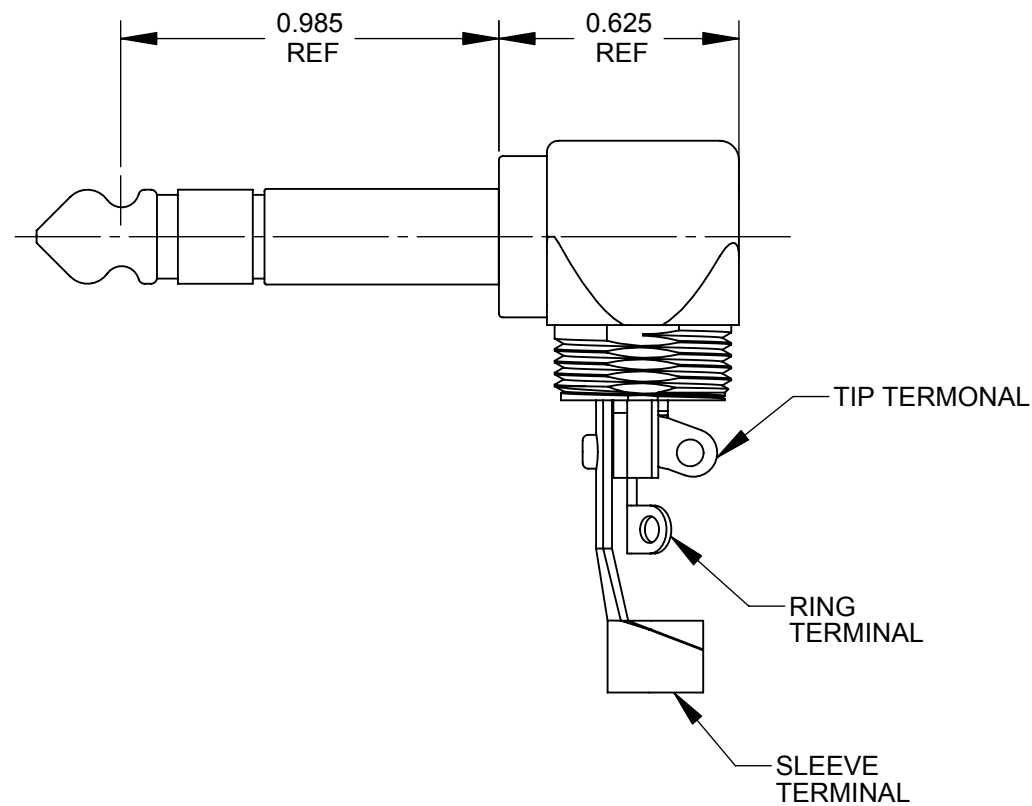


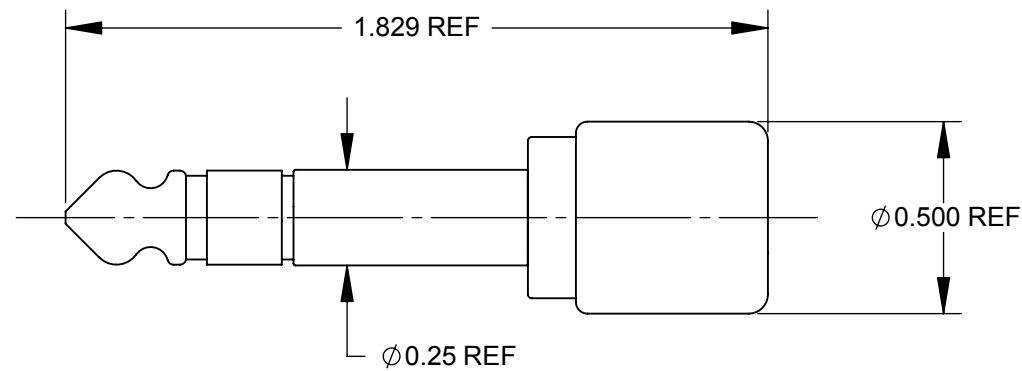

HANDLE AND INSULATOR
SHIPPED UNASSEMBLED

SPECIFICATIONS:

MATERIAL

- TIP ROD, RING AND HANDLE - BRASS, NICKEL PLATED
- HOUSING AND SLEEVE - ZINC DIE CAST, COPPER AND NICKEL PLATED
- TIP AND RING TERMINALS - BRASS, TIN PLATED
- SLEEVE (CLAMP) TERMINAL - STEEL, TIN PLATED
- INSULATION - THERMOPLASTIC

ELECTRICAL

- DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC
- INSULATION RESISTANCE: 50,000 MEGOHMS MINIMUM (INITIAL)

OPERATING TEMPERATURE

- 20°C TO +65°C

MATING JACK

- TYP, 1/4 INCH, COMMERCIAL TYPE, 3 CONDUCTOR PHONE JACKS

H THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES - TWO PLACE DECIMALS ±0.02 - THREE PLACE DECIMALS ±0.005	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.										
						SIZE	WIDTH		MULT		LBS/M		TEMPER			
						FINISH					MATERIAL					
						SPEC No.					SPEC No.					
						FIRST USED ON				SCALE		Switchcraft®				
										2:1						
H	25760	12-5-07	TJK	TJK	DO NOT SCALE DRAWING	DATE DRAWN	BY	CHKD		APVD		SHEET 1 OF 1				
G	CAD REDRAWN 25124	10-28-05	JL	GG		10-28-05	JL	GG		GG						
						10-28-05		10-28-05		10-28-05						
REV	ECO NUMBER	DATE	BY	APVD		NAME					PART No.					
REVISIONS						RA PHONE PLUG, 3 CONDUCTOR. RoHS					236					
										REV						
										H						

SolidWorks CAD File **B**