

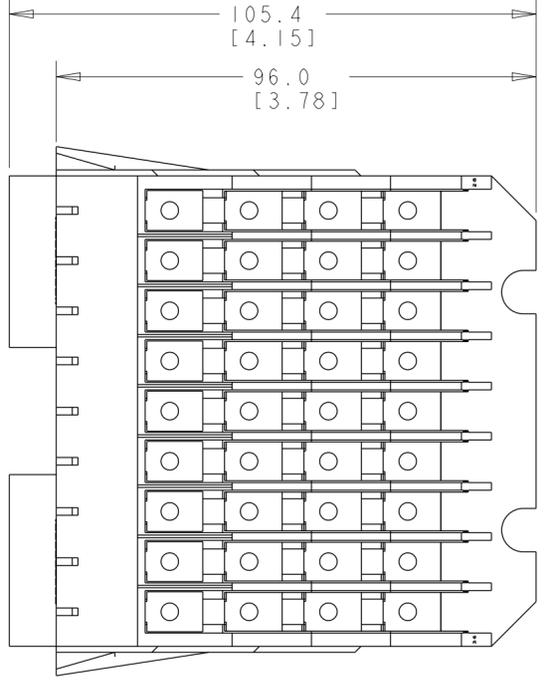
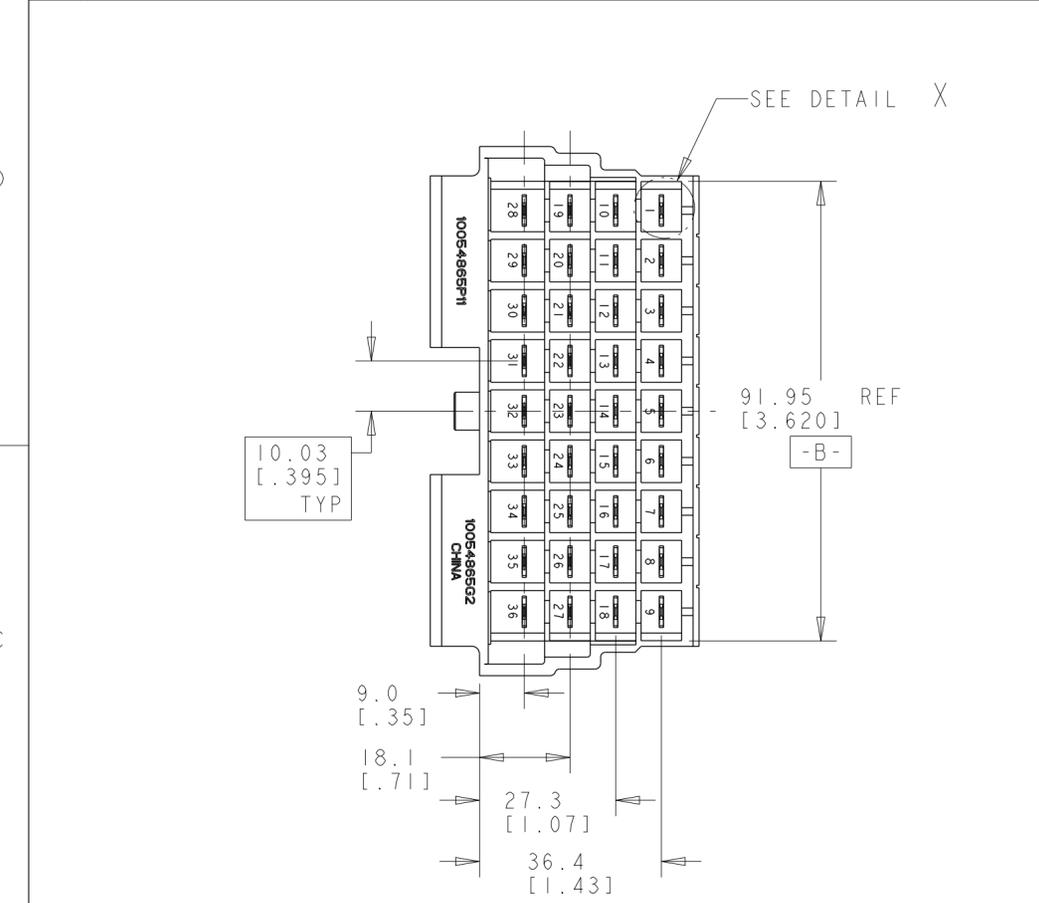
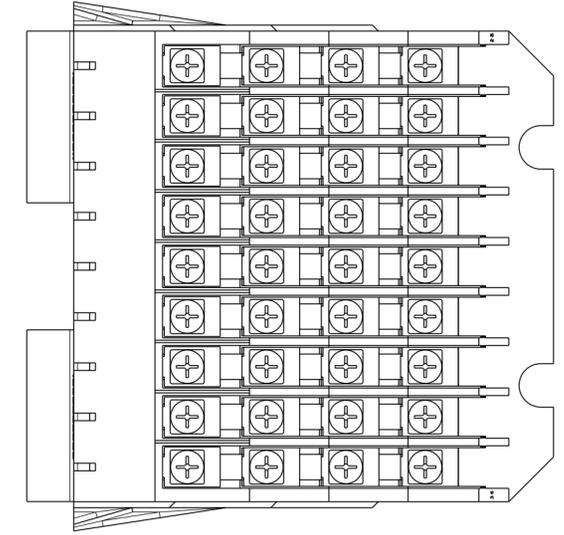


| LOC | | DIST | | REVISIONS | | | |
|-----|-----|---------------------------|-----------|-----------|------|--|--|
| P | LTR | DESCRIPTION | DATE | DWN | APVD | | |
| | A | REVISED PER ECO-12-020348 | 20NOV2012 | KH | MB | | |

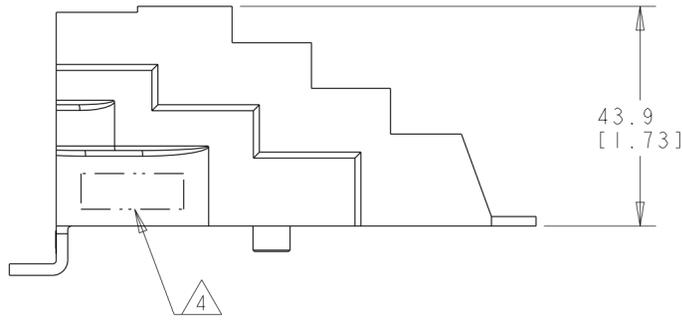

1. MATING FORCE TO FEMALE CONNECTOR SHALL BE 10-20 LBS.
2. UNMATING FORCE TO FEMALE CONNECTOR SHALL BE 8 LBS MIN.
3. CONTACT PULLOUT FORCE FROM HOUSING SHALL BE 21 POUNDS MIN.
- 4 PRINT DATE CODE (YYWW), APPROXIMATELY AS SHOWN.
- 5 SMS SCREW MATERIAL: CARBON STEEL
FINISH: ZINC AND CHROMATE
- 6 SCREWS TORQUED TO 7-9 IN-LBS
- 7 PRELIMINARY PART NUMBER

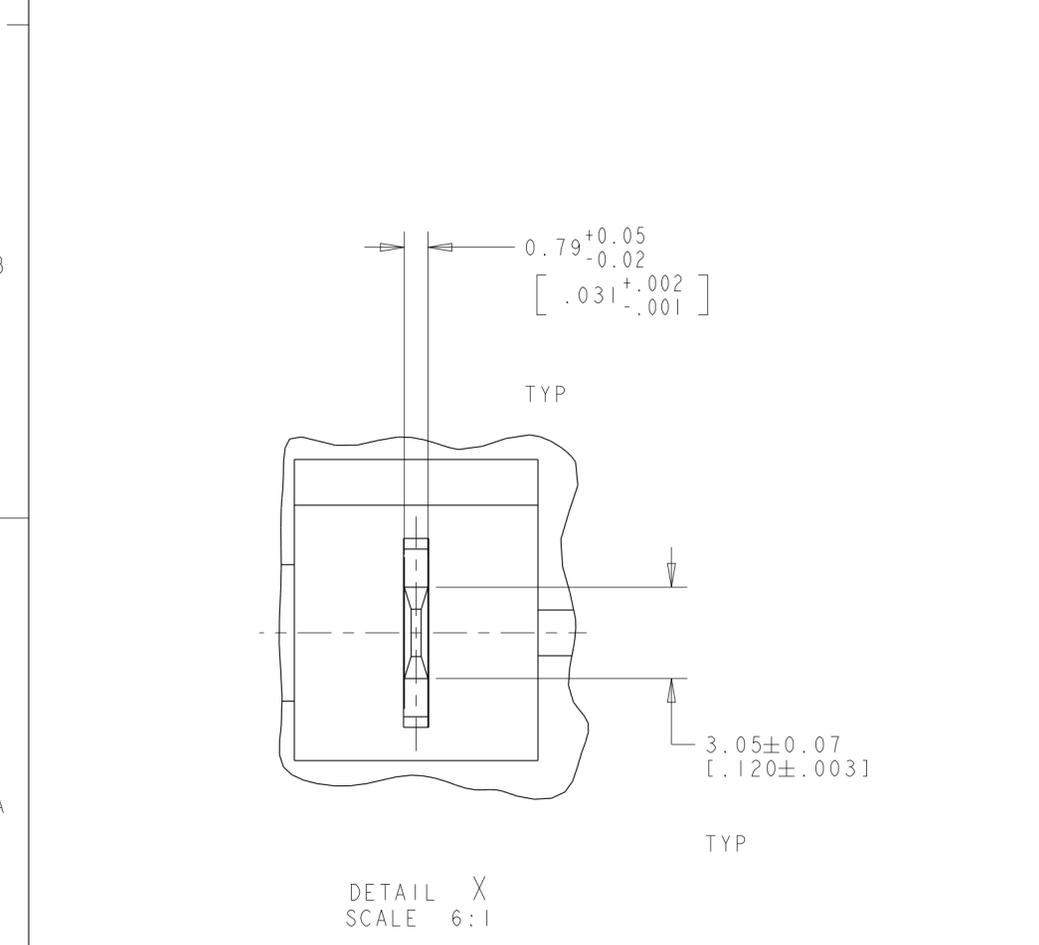

| | | | |
|----------|---|---|-------------|
| 7 | 5 | 6 | 1546434-2 |
| | | | 1546434-1 |
| COMMENTS | | | PART NUMBER |

| | | | | | |
|--|--|------------------------|-----------|--|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN KIRAN, HOLAL | 24SEP2012 | TE Connectivity | |
| DIMENSIONS: mm [INCHES] | | CHK BRUBAKER, MARK | 24SEP2012 | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD BRUBAKER, MARK | 24SEP2012 | NAME ASSEMBLY, MALE, G.E. CONNECTOR | |
| 0 PLC ± | | PRODUCT SPEC | | SIZE CAGE CODE DRAWING NO | |
| 1 PLC ±0.0 | | APPLICATION SPEC | | RESTRICTED TO | |
| 2 PLC ±0.254(0.01) | | WEIGHT | | A200779 C-1546434 | |
| 3 PLC ±0.127(0.005) | | Customer Drawing | | SCALE : SHEET OF REV A | |
| 4 PLC ±0.0508(0.002) | | | | | |
| ANGLES ±2° | | | | | |
| FINISH | | | | | |