




MICRO SWITCH
FREEPORT ILLINOIS
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

1HS11

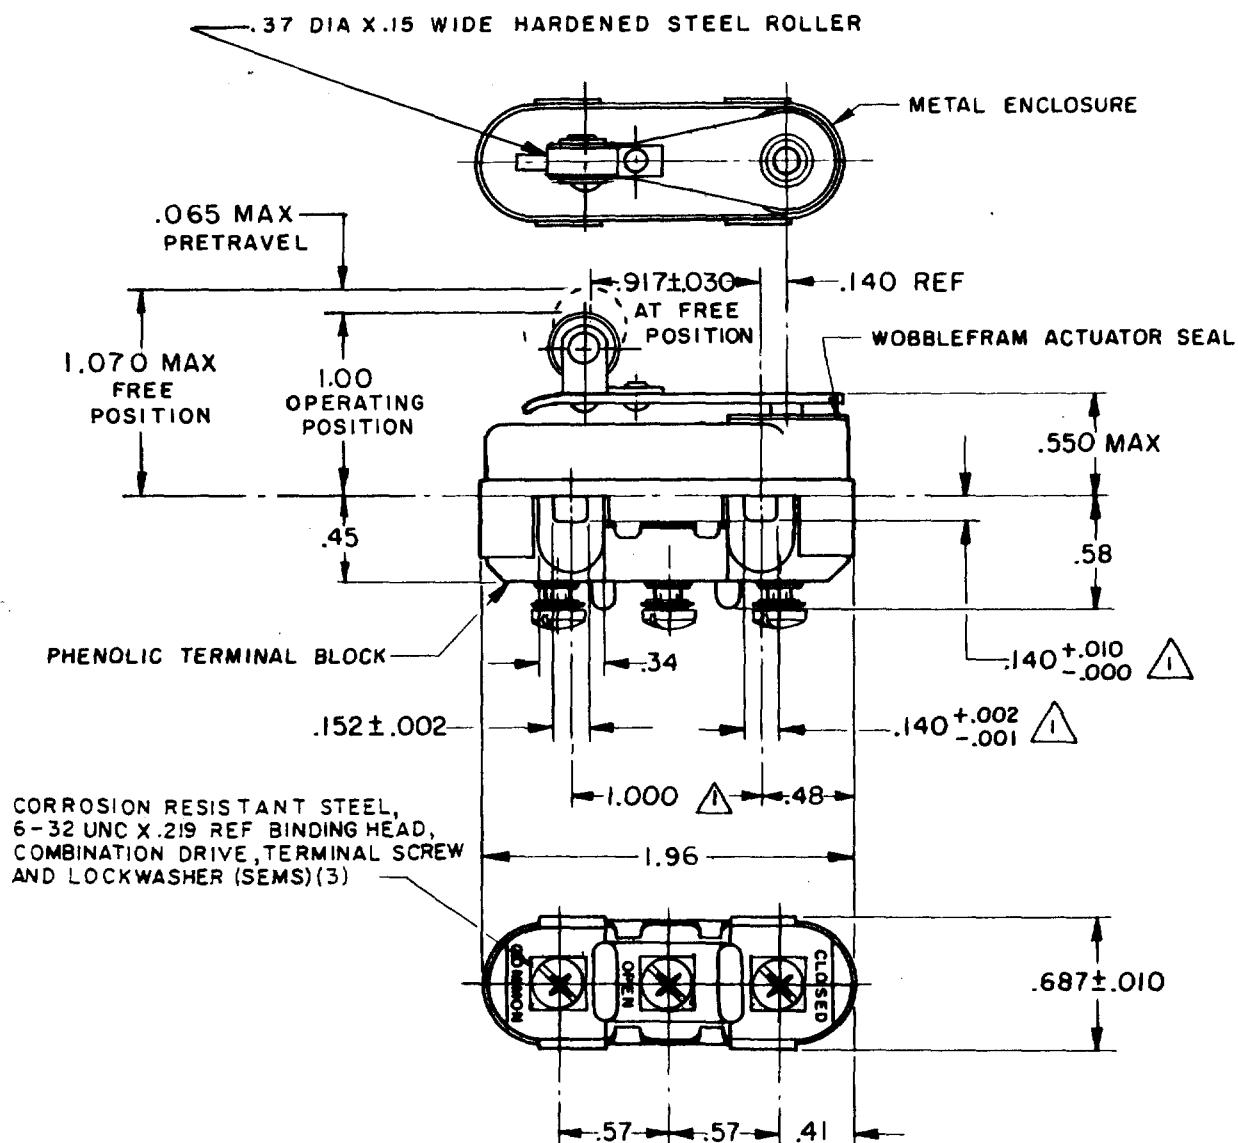

CORROSION RESISTANT STEEL,
6-32 UNC X .219 REF BINDING HEAD,
COMBINATION DRIVE, TERMINAL SCREW
AND LOCKWASHER (SEMS) (3)

NOTE -

- △ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - TRAVEL CHARACTERISTICS ARE REFERENCED FROM THE UPPER SURFACE OF THE MOUNTING HOLES WITH THIS CONSTRUCTION
- 3 - FOR USE IN AMBIENT TEMPERATURE RANGE FROM MINUS 65° F TO PLUS 250° F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA			SCALE FULL	
OPERATING FORCE — — — — 10 - 26 OZ		CONTACT ARRANGEMENT			DO NOT SCALE PRINT	
RELEASE FORCE — — — — 4 OZ MIN		S P D T			UNLESS OTHERWISE SPECIFIED	
DIFFERENTIAL TRAVEL — — — .020 MAX		LINE VOLTAGE	INDUCTIVE LOAD	RESISTIVE LOAD	DIMENSIONS ARE IN INCHES	
OVERTRAVEL — — — — .010 MIN		28 VDC (SEA LEVEL-100,000 FT)	8 AMP	25 AMP	TOLERANCES ARE:	
		125 VAC (SEA LEVEL-70,000 FT)	1 AMP	.5 AMP	ONE PLACE (.0)	±.030
					TWO PLACE (.00)	±.015
					THREE PLACE (.000)	±.005
					ANGLES	±
		L277 1A-125VAC, 5A-28VDC			WEIGHT 1.8 OZ MAX	

1HS11

PAGE 1 OF 1

M

DRAWING
NUMBER

ISSUE
X 8
X 13

REVISIONS

A	CO17633	MBF	15 FEB 63
B	CO29829	OMW	27 DEC 71
C	CO55162N	TSK	17 JAN 86
D	CO62736	MAM	15 MAR 88
E	CO61043	BGS	16 SEP 88
F	CO72580	DAW	20 AUG 92
G	CO75625	JDB	14 JULY 93
H	CO76375	WES	31 AUG 93
J	CO94122	TSM	12 MAR 99

FO-50378

FORMTEK

DRAWN

MBF 15 FEB 63