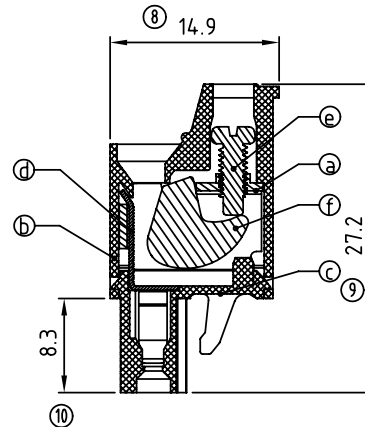
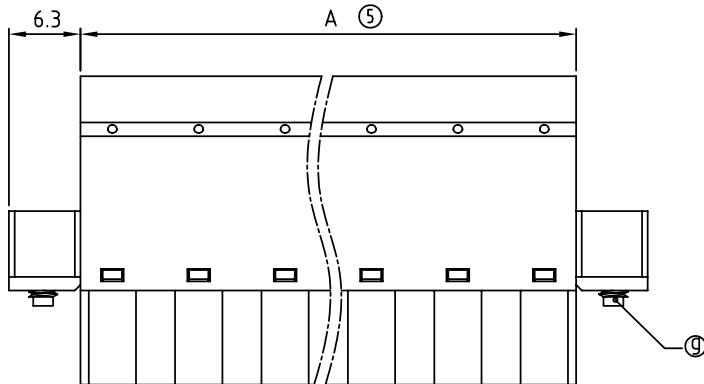
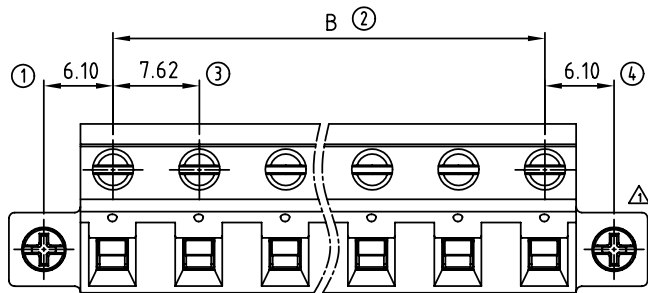


SIGN	DATE	DESCRIPTION	APPROVER
△	12/02'08	Flange screw changed from "-" to "+/-"	Tony
△	3/11'09	Dim.A & Dim.B Changed	Tony
△	2009.12.18	Add UL standard	Jacke
△	2010.03.23	Add the 2p mark	Jacke
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material:

- Item ① Clamp: Steel Zinc plated
- Item ② Terminal(Up body): Thermoplastic (UL94V-0)
- Item ③ Terminal(Down body): Thermoplastic (UL94V-0)
- Item ④ Female contact: PhBz(CuSn),Tin plated.
- Item ⑤ Terminal screw: Steel Zinc plating "-" slot type
- Item ⑥ Clampage:Steel/steel Zinc plated
- Item ⑦ With flange screw: Steel Zinc plated, M2.5

Electrical: cULus

- Voltage rating: 300V
- Current rating: 20A
- Wire range:
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque: 3.5 Lb-In.
- Screw: M2.5
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: cULus

VM xx 0 5 x 3 xxxx G

POLES				G: Pb<40000ppm
02: 02 pole				
... ..				
16: 16 pole				
	Color			0000: "@" Logo (Standard) (Steel screw plating Cr ³)
	0 Black (RAL9005)			000A: "ANYTEK" Mark
	2 Red (RAL3001/D)			Any special item by
	3 Orange(RAL2011/P)			customer request.
	4 Yellow(RAL1018/A)			please contact sales
	5 Green(RAL6018/T)			department.
	6 Blue (RAL5015/A)			
	8 Grey(RAL7035/D)			

POLE		2	3	4	5	6	7	8
A		13.24	20.86	28.48	36.10	43.72	51.34	58.96
B		7.62	15.24	22.86	30.48	38.10	45.72	53.34
Tol.	±0.15				±0.20			
POLE	9	10	11	12	13	14	15	16
A	66.58	74.20	81.82	89.44	97.06	104.68	112.30	119.92
B	60.96	68.58	76.20	83.82	91.44	99.06	106.68	114.30
Tol.	±0.30				±0.40			

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		VM 7.62 mm W/ Flange Series						
PART NO.		VMxx05x3xxxxG			DWG NO.		8VM0501	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
			Jacke	Jacke			UNIT: mm	X. ±0.50
			2010.03.23	2009.12.18			SCALE: NONE	X.X ±0.30
							REV.: F	X.XX ±0.10
								X° ±1°