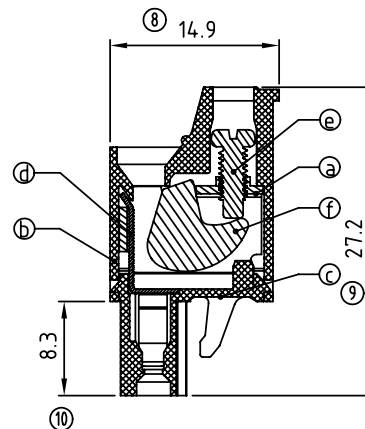
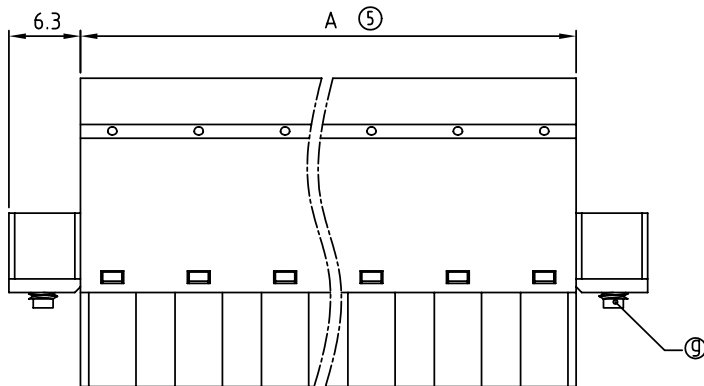
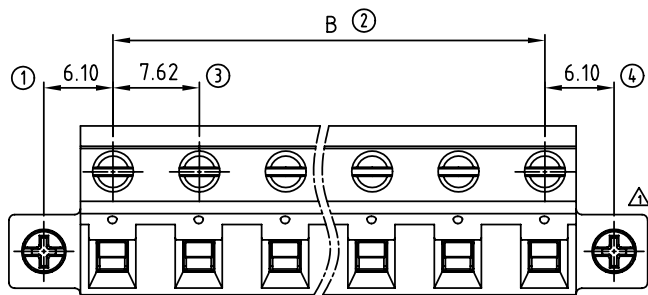


| SIGN                                           | DATE       | DESCRIPTION                            | APPROVER |
|------------------------------------------------|------------|----------------------------------------|----------|
| △                                              | 12/02'08   | Flange screw changed from "-" to "+/-" | Tony     |
| △                                              | 3/11'09    | Dim.A & Dim.B Changed                  | Tony     |
| △                                              | 2009.12.18 | Add UL standard                        | Jacke    |
| △                                              | 2010.03.23 | Add the 2p mark                        | Jacke    |
| THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!! |            |                                        |          |

Material:

- Item ① Clamp: Steel Zinc plated
- Item ② Terminal(Up body): Thermoplastic (UL94V-0)
- Item ③ Terminal(Down body): Thermoplastic (UL94V-0)
- Item ④ Female contact: PhBz(CuSn),Tin plated.
- Item ⑤ Terminal screw: Steel Zinc plating "-" slot type
- Item ⑥ Clampage:Steel/steel Zinc plated
- Item ⑦ With flange screw: Steel Zinc plated, M2.5

Electrical: cULus

- Voltage rating: 300V
- Current rating: 20A
- Wire range:
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque: 3.5 Lb-In.
- Screw: M2.5
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: cULus

VM xx 0 5 x 3 xxxx G

|             |                     |  |  |                                                                     |
|-------------|---------------------|--|--|---------------------------------------------------------------------|
| POLES       |                     |  |  | G: Pb<40000ppm                                                      |
| 02: 02 pole |                     |  |  |                                                                     |
| ... ..      |                     |  |  |                                                                     |
| 16: 16 pole |                     |  |  |                                                                     |
|             | Color               |  |  | 0000: "@" Logo (Standard)<br>(Steel screw plating Cr <sup>3</sup> ) |
|             | 0 Black (RAL9005)   |  |  | 000A: "ANYTEK" Mark                                                 |
|             | 2 Red (RAL3001/D)   |  |  | Any special item by                                                 |
|             | 3 Orange(RAL2011/P) |  |  | customer request.                                                   |
|             | 4 Yellow(RAL1018/A) |  |  | please contact sales                                                |
|             | 5 Green(RAL6018/T)  |  |  | department.                                                         |
|             | 6 Blue (RAL5015/A)  |  |  |                                                                     |
|             | 8 Grey(RAL7035/D)   |  |  |                                                                     |

|      |       |       |       |       |       |        |        |        |
|------|-------|-------|-------|-------|-------|--------|--------|--------|
| POLE |       | 2     | 3     | 4     | 5     | 6      | 7      | 8      |
| A    |       | 13.24 | 20.86 | 28.48 | 36.10 | 43.72  | 51.34  | 58.96  |
| B    |       | 7.62  | 15.24 | 22.86 | 30.48 | 38.10  | 45.72  | 53.34  |
| Tol. | ±0.15 |       |       |       | ±0.20 |        |        |        |
| POLE | 9     | 10    | 11    | 12    | 13    | 14     | 15     | 16     |
| A    | 66.58 | 74.20 | 81.82 | 89.44 | 97.06 | 104.68 | 112.30 | 119.92 |
| B    | 60.96 | 68.58 | 76.20 | 83.82 | 91.44 | 99.06  | 106.68 | 114.30 |
| Tol. | ±0.30 |       |       |       | ±0.40 |        |        |        |

**ANYTEK**

**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

|          |                             |                     |                     |          |              |  |            |
|----------|-----------------------------|---------------------|---------------------|----------|--------------|--|------------|
| TITLE    | VM 7.62 mm W/ Flange Series |                     |                     |          |              |  |            |
| PART NO. | VMxx05x3xxxxG               |                     |                     | DWG NO.  | 8VM0501      |  |            |
| APPROVED | CHECKED                     | DESIGNED            | DRAWN               | CUST NO. |              |  |            |
|          |                             | Jacke<br>2010.03.23 | Jacke<br>2009.12.18 |          | UNIT: mm     |  | X. ±0.50   |
|          |                             |                     |                     |          | SCALE: NONE  |  | X.X ±0.30  |
|          |                             |                     |                     |          | SHEET: 01/01 |  | X.XX ±0.10 |
|          |                             |                     |                     |          | REV.: F      |  | X° ±1°     |