
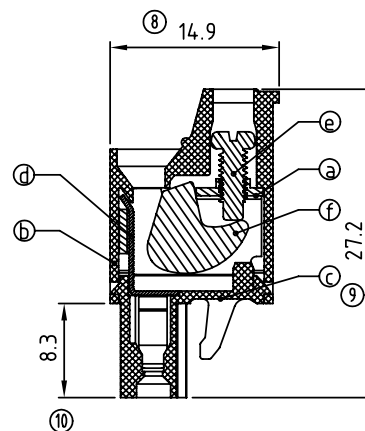

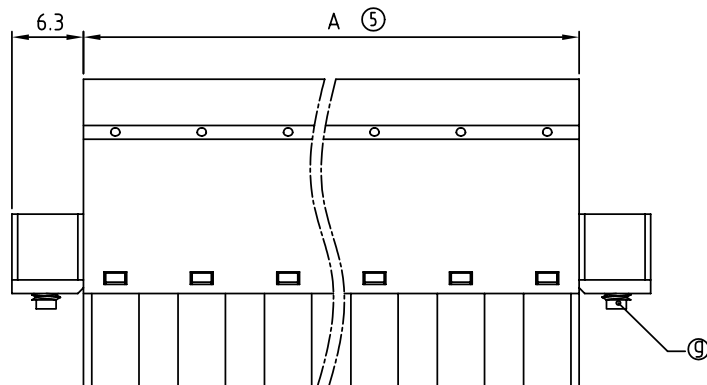


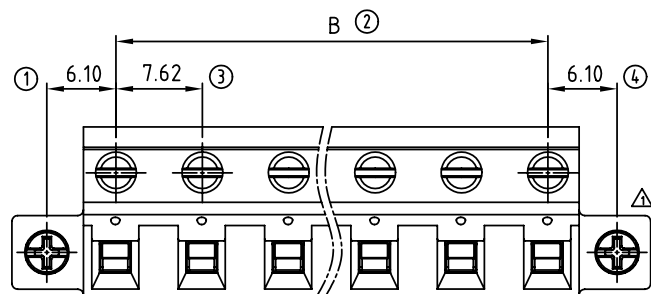

|      |       |       |       |       |       |        |        |        |
|------|-------|-------|-------|-------|-------|--------|--------|--------|
| POLE |       | 2     | 3     | 4     | 5     | 6      | 7      | 8      |
| A    |       | 13.24 | 20.86 | 28.48 | 36.10 | 43.72  | 51.34  | 58.96  |
| B    |       | 7.62  | 15.24 | 22.86 | 30.48 | 38.10  | 45.72  | 53.34  |
| Tol. |       | ±0.15 |       |       | ±0.20 |        |        |        |
| POLE | 9     | 10    | 11    | 12    | 13    | 14     | 15     | 16     |
| A    | 66.58 | 74.20 | 81.82 | 89.44 | 97.06 | 104.68 | 112.30 | 119.92 |
| B    | 60.96 | 68.58 | 76.20 | 83.82 | 91.44 | 99.06  | 106.68 | 114.30 |
| Tol. |       | ±0.30 |       |       | ±0.40 |        |        |        |

| SIGN                                           | DATE       | DESCRIPTION                            | APPROVER |
|------------------------------------------------|------------|----------------------------------------|----------|
| △                                              | 12/02'08   | Flange screw changed from "-" to "+/-" | Tony     |
| △                                              | 3/11'09    | Dim.A & Dim.B Changed                  | Tony     |
| △                                              | 2009.12.18 | Add UL standard                        | Jacke    |
| △                                              | 2010.03.23 | Add the 2p mark                        | Jacke    |
| THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!! |            |                                        |          |

Material:

- Item ③ Clamp: Steel Zinc plated
- Item ④ Terminal(Up body): Thermoplastic (UL94V-0)
- Item ⑤ Terminal(Down body): Thermoplastic (UL94V-0)
- Item ⑥ Female contact: PbBz(CuSn),Tin plated.
- Item ⑦ Terminal screw: Steel Zinc plating "- " slot type
- Item ⑧ Clampcage:Steel/steel Zinc plated
- Item ⑨ With flange screw: Steel Zinc plated, M2.5

Electrical: cULus

- Voltage rating: 300V
- Current rating: 20A
- Wire range:
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque: 3.5 Lb-In.
- Screw: M2.5
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: 

VM xx 0 5 x 3 xxxx G

POLES

02: 02 pole

///      ///

16: 16 pole

Color

- 0 Black (RAL9005)  
2 Red (RAL3001/D)  
3 Orange(RAL2011/P)  
4 Yellow(RAL1018/A)  
5 Green(RAL6018/T)  
6 Blue (RAL5015/A)  
8 Grey(RAL7035/D)

— G: Pb<40000ppm

— 0000: “@” Logo (Standard)  
(Steel screw plating Cr<sup>3+</sup>)

000A: "ANYTEK" Mark  
Any special item by  
customer request.  
please contact sales  
department.

|                 |  |                             |                     |                                                                                                                                                                                                                         |                                                                                                                              |         |                                               |
|-----------------|--|-----------------------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|---------|-----------------------------------------------|
| <h1>ANYTEK</h1> |  |                             |                     | <h2>CUSTOMER COPY</h2> <p>ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD</p> |                                                                                                                              |         |                                               |
| TITLE           |  | VM 7.62 mm W/ Flange Series |                     |                                                                                                                                                                                                                         |                                                                                                                              |         |                                               |
| PART NO.        |  | VMxx05x3xxxxG               |                     | DWG NO.                                                                                                                                                                                                                 |                                                                                                                              | 8VM0501 |                                               |
| APPROVED        |  | CHECKED                     | DESIGNED            | DRAWN                                                                                                                                                                                                                   | CUST NO.                                                                                                                     |         | Tolerance                                     |
|                 |  |                             | Jacke<br>2010.03.23 | Jacke<br>2009.12.18                                                                                                                                                                                                     |  <div> UNIT: mm<br/> SCALE: NONE </div> |         | X. ±0.50<br>X.X ±0.30<br>X.XX ±0.10<br>X° ±1° |
|                 |  |                             |                     |                                                                                                                                                                                                                         | SHEET: 01/01                                                                                                                 |         | REV.: F                                       |