

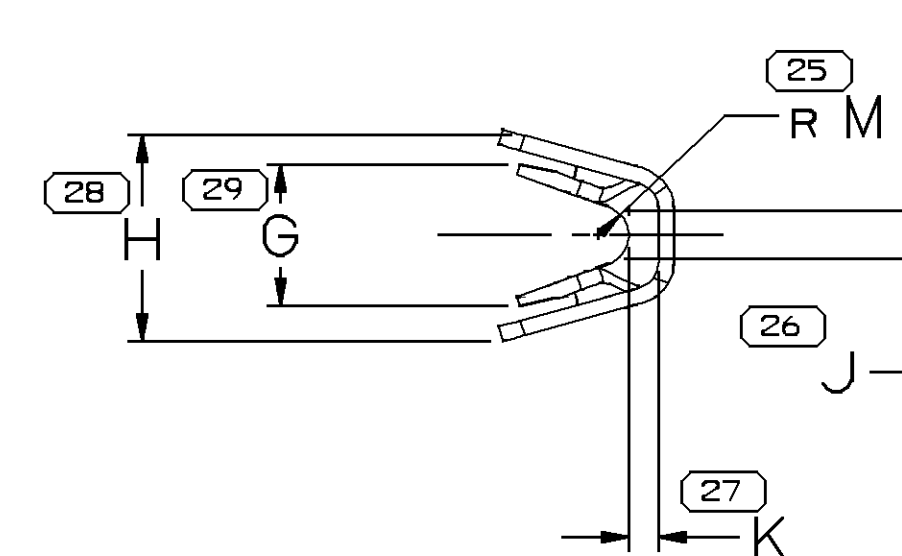


MISSING SYMBOLS		DWG STATUS					ZONE	REVISION HISTORY		AUTH	DR	APR	CPC
		DATE	STS	REV	N/P	CHG							
NO MISSING SYMBOL NUMBER		16JUL01	R	01	-	-	CREATED PD		203721	ESF	ESF	B6	
		135E04	R	02	-	-	ALL ACTIVE PARTS - UPDATED PDM ATTRIBUTES		257866	ESF	ESF	B6	
		12F0E7	R	03	-	-	12065940, 12065950-51 & 12077946 - OBSOLETE; 12077945 - RESTRICTED; 12065982-94, 12089236 & 12103948 - MAT'L SPEC WAS P3604		400499	JBD	JFR	B06	
		27F0E7	R	04	-	-	ALL ACTIVE PARTS - MATERIAL SPEC WAS M3606404		400643	MM	MM	B06	

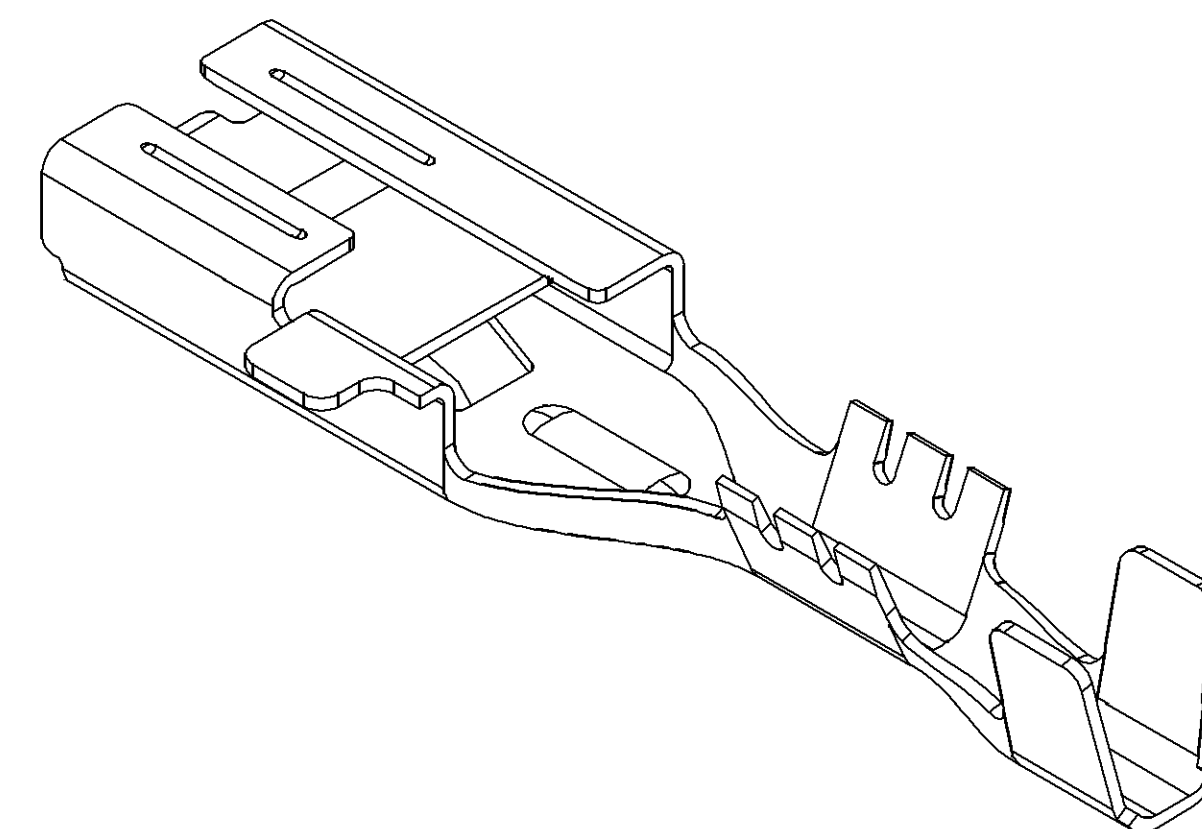

WING CONST. II

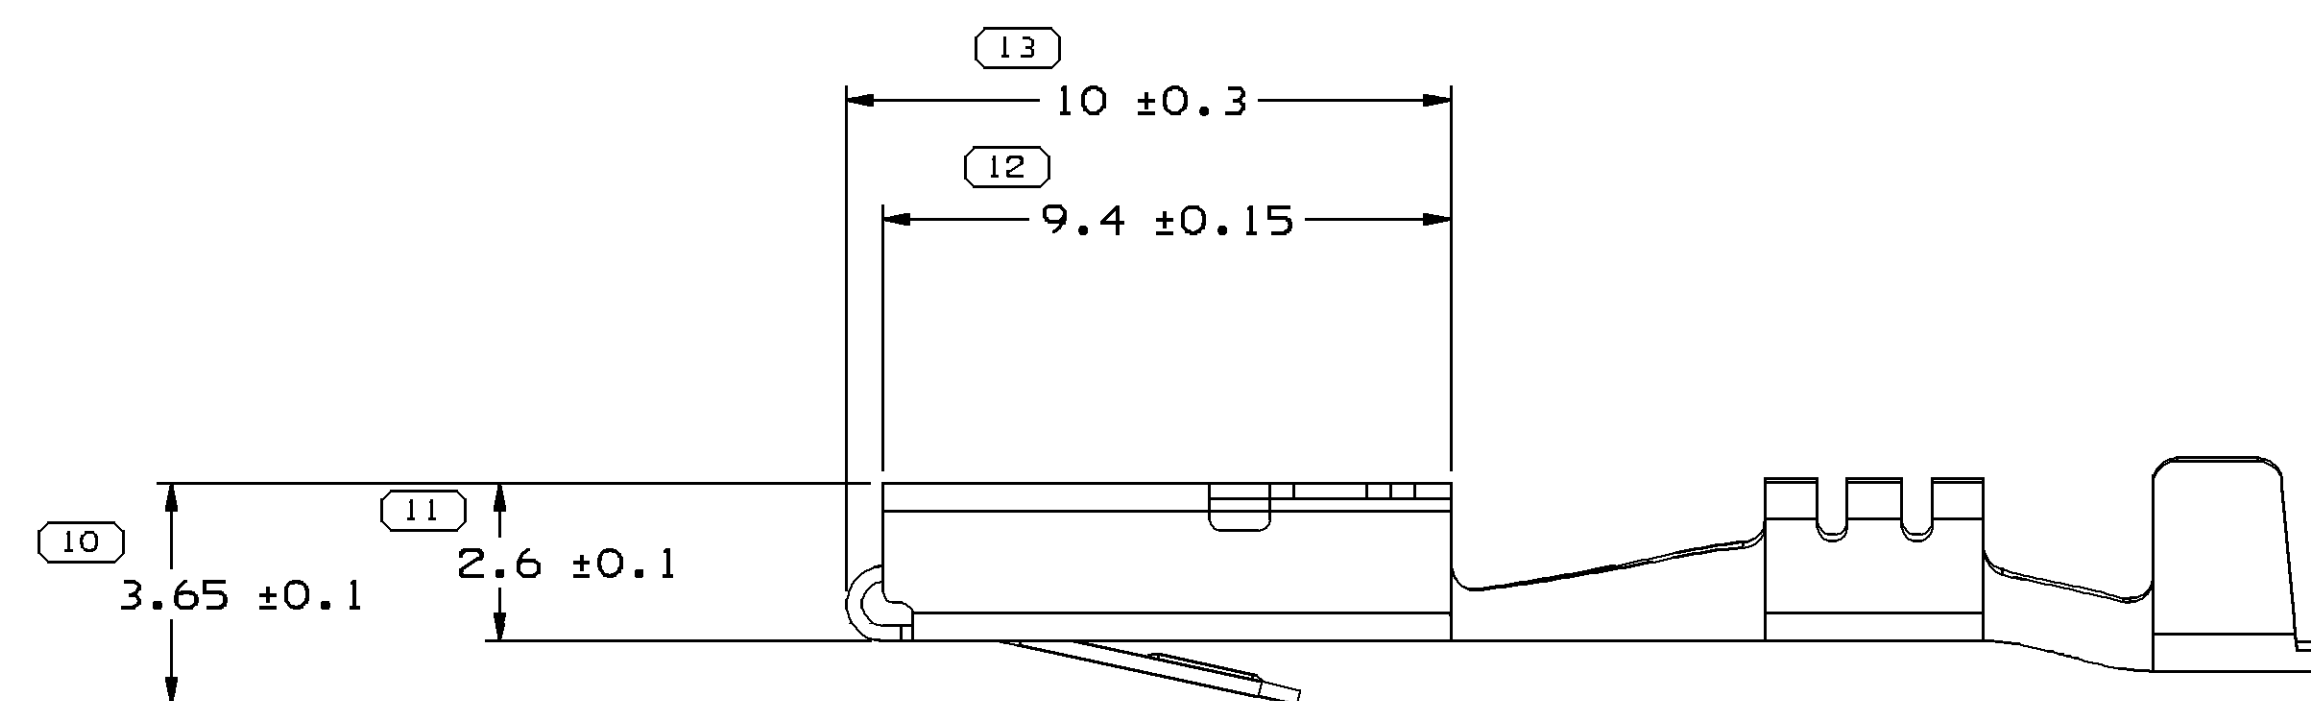

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION
(SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL
OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL
BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
ALL RADII 0.2
2. R 0.4 MAX PERMISSIBLE ON ALL "SHARP" CORNERS.
ALL LOCKING FEATURES MUST HAVE "SHARP" CORNERS.
3. "PXX" INDICATES "P" PLUS LAST TWO DIGITS OF MAKE DIE
SERIES NUMBER (P01, P02, P03, ETC.).
4. * DENOTES DIMENSION MADE AT CUT-OFF AND CRIMP DIE.
5. MAXIMUM CURRENT CAPABILITY IS 24 AMPS.
6. TERMINAL ENGAGE 6N TO 27N TERMINAL DISENGAGE
2N TO 15N WHEN MATED TO A 0.81 THICK X 4.8 WIDE
HARDENED STEEL BLADE.
7. "▲" INDICATES MATERIAL TIN PLATE OVER COPPER PLATE.
8. RECOMMENDED MATING BLADE
- WIDTH: 4.8 ± 0.1
THICKNESS: 0.825 ± 0.035
LENGTH: 7 ± 0.1

[illegible]

DELPHI DELPHI PACKARD ELECTRICAL/ELECTRONIC ARCHITECTURE WARREN, OH									
DR								DATE	
APV01		E. SALAZAR						16.JUL.01	
APV02		E. SALAZAR						16.JUL.01	
APV03		B. GROUBERT						16.JUL.01	
APV04									
APV05									
SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI (10-449001)									
MATERIAL									
SEE CHART									
DRAWING NAME									
TAXI TERM M/P 480 SPL									
DRAWING NUMBER									
12065899									
SIZE	SCALE	FRAME NO	SHEET NO	STG	REV	N/P			
A	1/4"	1	1 OF 1	01	0	04			

11		PROCESS SENSITIVE DIMENSION	
DIMENSIONS ENCLOSED IN () INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED			
DIMENSIONAL RANGE (MM)		CHART	
FROM	0		
TO	12	> 12	
TOLERANCE UNLESS OTHERWISE SPECIFIED			
±0.1		±0.2	

THIRD ANGLE
PROJECTION

DO NOT
SCALE

USE MATH
DATA









12077946	D4	OBSOLETE	0.254 X 36.5	M3604	12089236	B5	-	M3606440	(2) 0.35	2-1.05	222	101	11	2.4	5.1	1.3	0.5	-	0.5	1
12077943	C4	RESTRICTED	0.254 X 36.5	M3604	12103948	A5	-	M3606440	(2) 1.0-0.8	3.15-1.4	217	102	11	4.9	6.4	1.8	0.7	-	1.15x0.15	1.5
12077944	C2	OBSOLETE	0.254 X 36.5	M3604	-	-	-	-	(2) 0.5	2.4-2.2	220	102	11	3.6	5.9	1.3	0.7	-	0.9	1.5
12065951	E4	OBSOLETE	0.254 X 36.5	M3604	12065893	E5	-	M3606440	0.5-0.35	2.4-1.05	21	101	11	2.1x0.2	3.5x0.3	0.8	0.5	-	0.5	1
12065950	G4	OBSOLETE	0.254 X 36.5	M3604	12065894	G5	-	M3606440	1-8	3.15-1.4	17	101	1	3	3.4	0.8	0.5	0.3	0.5	1
12065940	E4	OBSOLETE	0.254 X 36.5	M3604	12065892	E5	-	M3606440	3-2	3.4-3	13	102	1	4.6	5.7	1	0.8	0.8	1	2
12065949	C1	INACTIVE	0.254 X 36.5	M3604	12065891	C1	INACTIVE	P3604	2-1	3.1-1.5	15	101	1	3.6	4.4	0.8	0.7	0.8	0.5	1
PART NO	REV	STATUS	MAT'L SIZE	MAT'L SPEC	PART NO	REV	STATUS	MAT'L SPEC	SIZE (MM*)	CABLE DIA	ID	BLANK	WING	G	H	K	L	M	N	P