

IP67 Sealed Toggle Switches

Highest quality for the most demanding applications



3300 Series

Standard 15/32" diameter bushing. Standard Bat length is .560".

| Current Rating | Catalog No. | | Action | Termination |
|-------------------|-------------|-------|------------------|--------------------------|
| 20A -125VAC, 1 HP | 3305C | Fig 1 | SPST on-none-off | .250" QC |
| 20A -125VAC, 1 HP | 3305D | Fig 2 | SPST on-none-off | 6" Wire Leads, #16 Gauge |
| 20A -125VAC, 1 HP | 3301C | Fig 1 | SPDT on-none-on | .250" QC |
| 20A -125VAC, 1 HP | 3301D | Fig 2 | SPDT on-none-on | 6" Wire Leads, #16 Gauge |
| 20A -125VAC, 1 HP | 3302C | Fig 1 | SPDT on-off-on | .250" QC |
| 20A -125VAC, 1 HP | 3302D | Fig 2 | SPDT on-off-on | 6" Wire Leads, #16 Gauge |

3300 Series Toggle

Electrical Rating: 20A - 125 VAC , 10A - 250 VAC, 1 HP 125-250 VAC


Life Cycles: 100,000 Electrical 100,000 Mechanical

Operating Temp: -10 °C to +65 °C

Sealing: seal tested per IP67 standards to withstand submersion in water to a depth of 1 meter for 30 minutes, Meets IP68

Dielectric Strength 1000 Volts RMS Minimum

Mounting Means 15/32" Bushing, Keyway .078 - .083 Wide X .037 - .043 Deep, Standard Hardware supplied

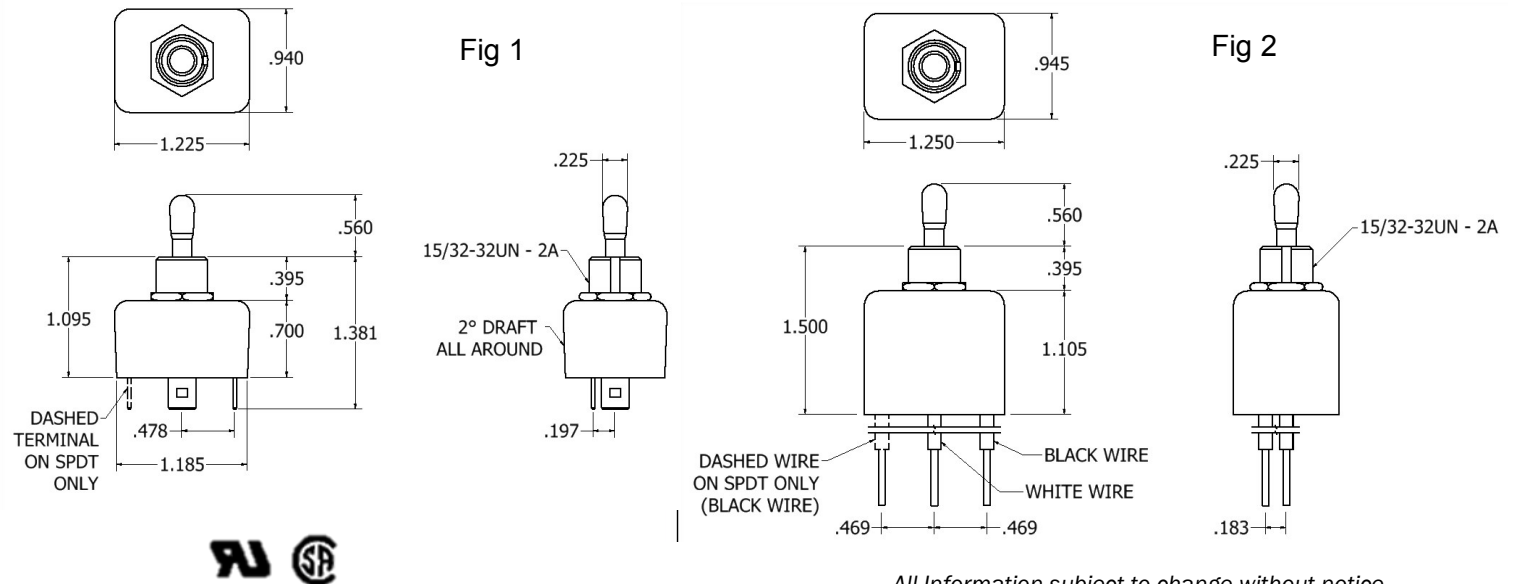

All Information subject to change without notice