

# IP67 Sealed Toggle Switches

Highest quality for the most demanding applications



## 3300 Series

Standard 15/32" diameter bushing. Standard Bat length is .560".

| Current Rating    | Catalog No. |       | Action           | Termination              |
|-------------------|-------------|-------|------------------|--------------------------|
| 20A -125VAC, 1 HP | 3305C       | Fig 1 | SPST on-none-off | .250" QC                 |
| 20A -125VAC, 1 HP | 3305D       | Fig 2 | SPST on-none-off | 6" Wire Leads, #16 Gauge |
| 20A -125VAC, 1 HP | 3301C       | Fig 1 | SPDT on-none-on  | .250" QC                 |
| 20A -125VAC, 1 HP | 3301D       | Fig 2 | SPDT on-none-on  | 6" Wire Leads, #16 Gauge |
| 20A -125VAC, 1 HP | 3302C       | Fig 1 | SPDT on-off-on   | .250" QC                 |
| 20A -125VAC, 1 HP | 3302D       | Fig 2 | SPDT on-off-on   | 6" Wire Leads, #16 Gauge |

### 3300 Series Toggle

**Electrical Rating:** 20A - 125 VAC , 10A - 250 VAC, 1 HP 125-250 VAC

**Life Cycles:** 100,000 Electrical 100,000 Mechanical

**Operating Temp:** -10 °C to +65 °C

**Sealing:** seal tested per IP67 standards to withstand submersion in water to a depth of 1 meter for 30 minutes, Meets IP68

**Dielectric Strength** 1000 Volts RMS Minimum

**Mounting Means** 15/32" Bushing, Keyway .078 - .083 Wide X .037 - .043 Deep, Standard Hardware supplied

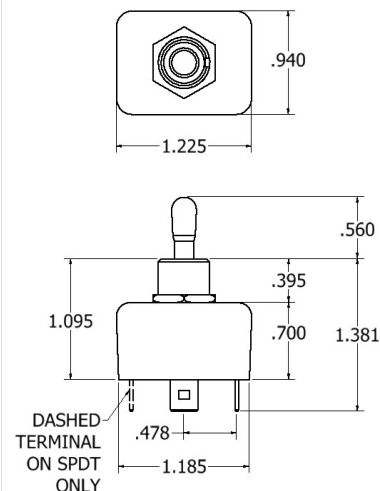


Fig 1






Fig 2

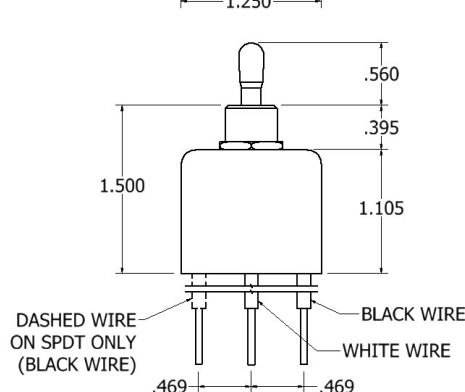

All Information subject to change without notice

Flier EEP-SG-20 RevA ©Copyright Electroswitch 2014