

NOTES: ±.001


- ① MAT'L: COPPER (STOCK TKN. $\frac{.040}{1.02}$)
- PLATING: ELECTRO TIN (.0003 MIN)
- ② TIN-PLATED BRASS FUNNEL FERRULE

STUD SIZES: ($\pm .005$)

02 = .094	413 = 413
04 = .119	76 = 453
06 = .146	12 = 515
08 = .173	
10 = .198	
14 = .265	
56 = .328	
38 = .390	
209 = .209	

"UL" LISTING #E32244
 "CSA" LISTING #18689

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$ (MWID) DENOTES MAXIMUM WIRE INSULATION DIAMETER

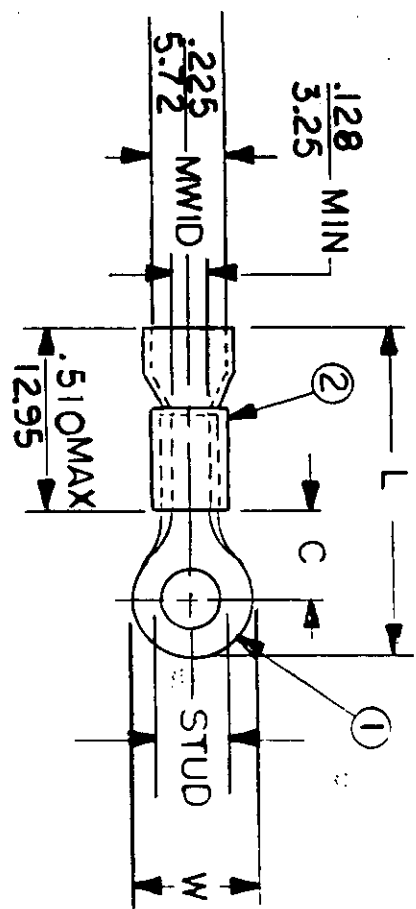

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.				AVAILABLE STUD SIZES	
C-401-	.750 19.05	.611 15.52	1.531 38.89				14, 56, 38, 76, 12	
C-428-	.375 9.53	.303 7.70	1.036 26.31				04, 06, 08, 10, 209	
C-430-	.530 13.46	.393 9.98	1.203 30.56				10, 14, 56, 38	
C-436-	.282 7.16	.306 7.77	.992 25.20				04, 06, 08	
C-440-	.592 15.04	.468 11.84	1.307 33.20				10, 14, 56, 38, 209, 413	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED				REFERENCE	SCALE: NTS	DATE	TITLE:	
FRAC.	DEC.	ANG.			DRWN. BY: JJ	11-19-84	RING TONGUE TERMINAL VIBRAKRIMP 400-SERIES	
±	±	±			CHKD. BY: GZ	11-26-84		
					APPRD. BY:			
								DWG. NO. A CUSTOMER DWG
								