


D

C

B

A

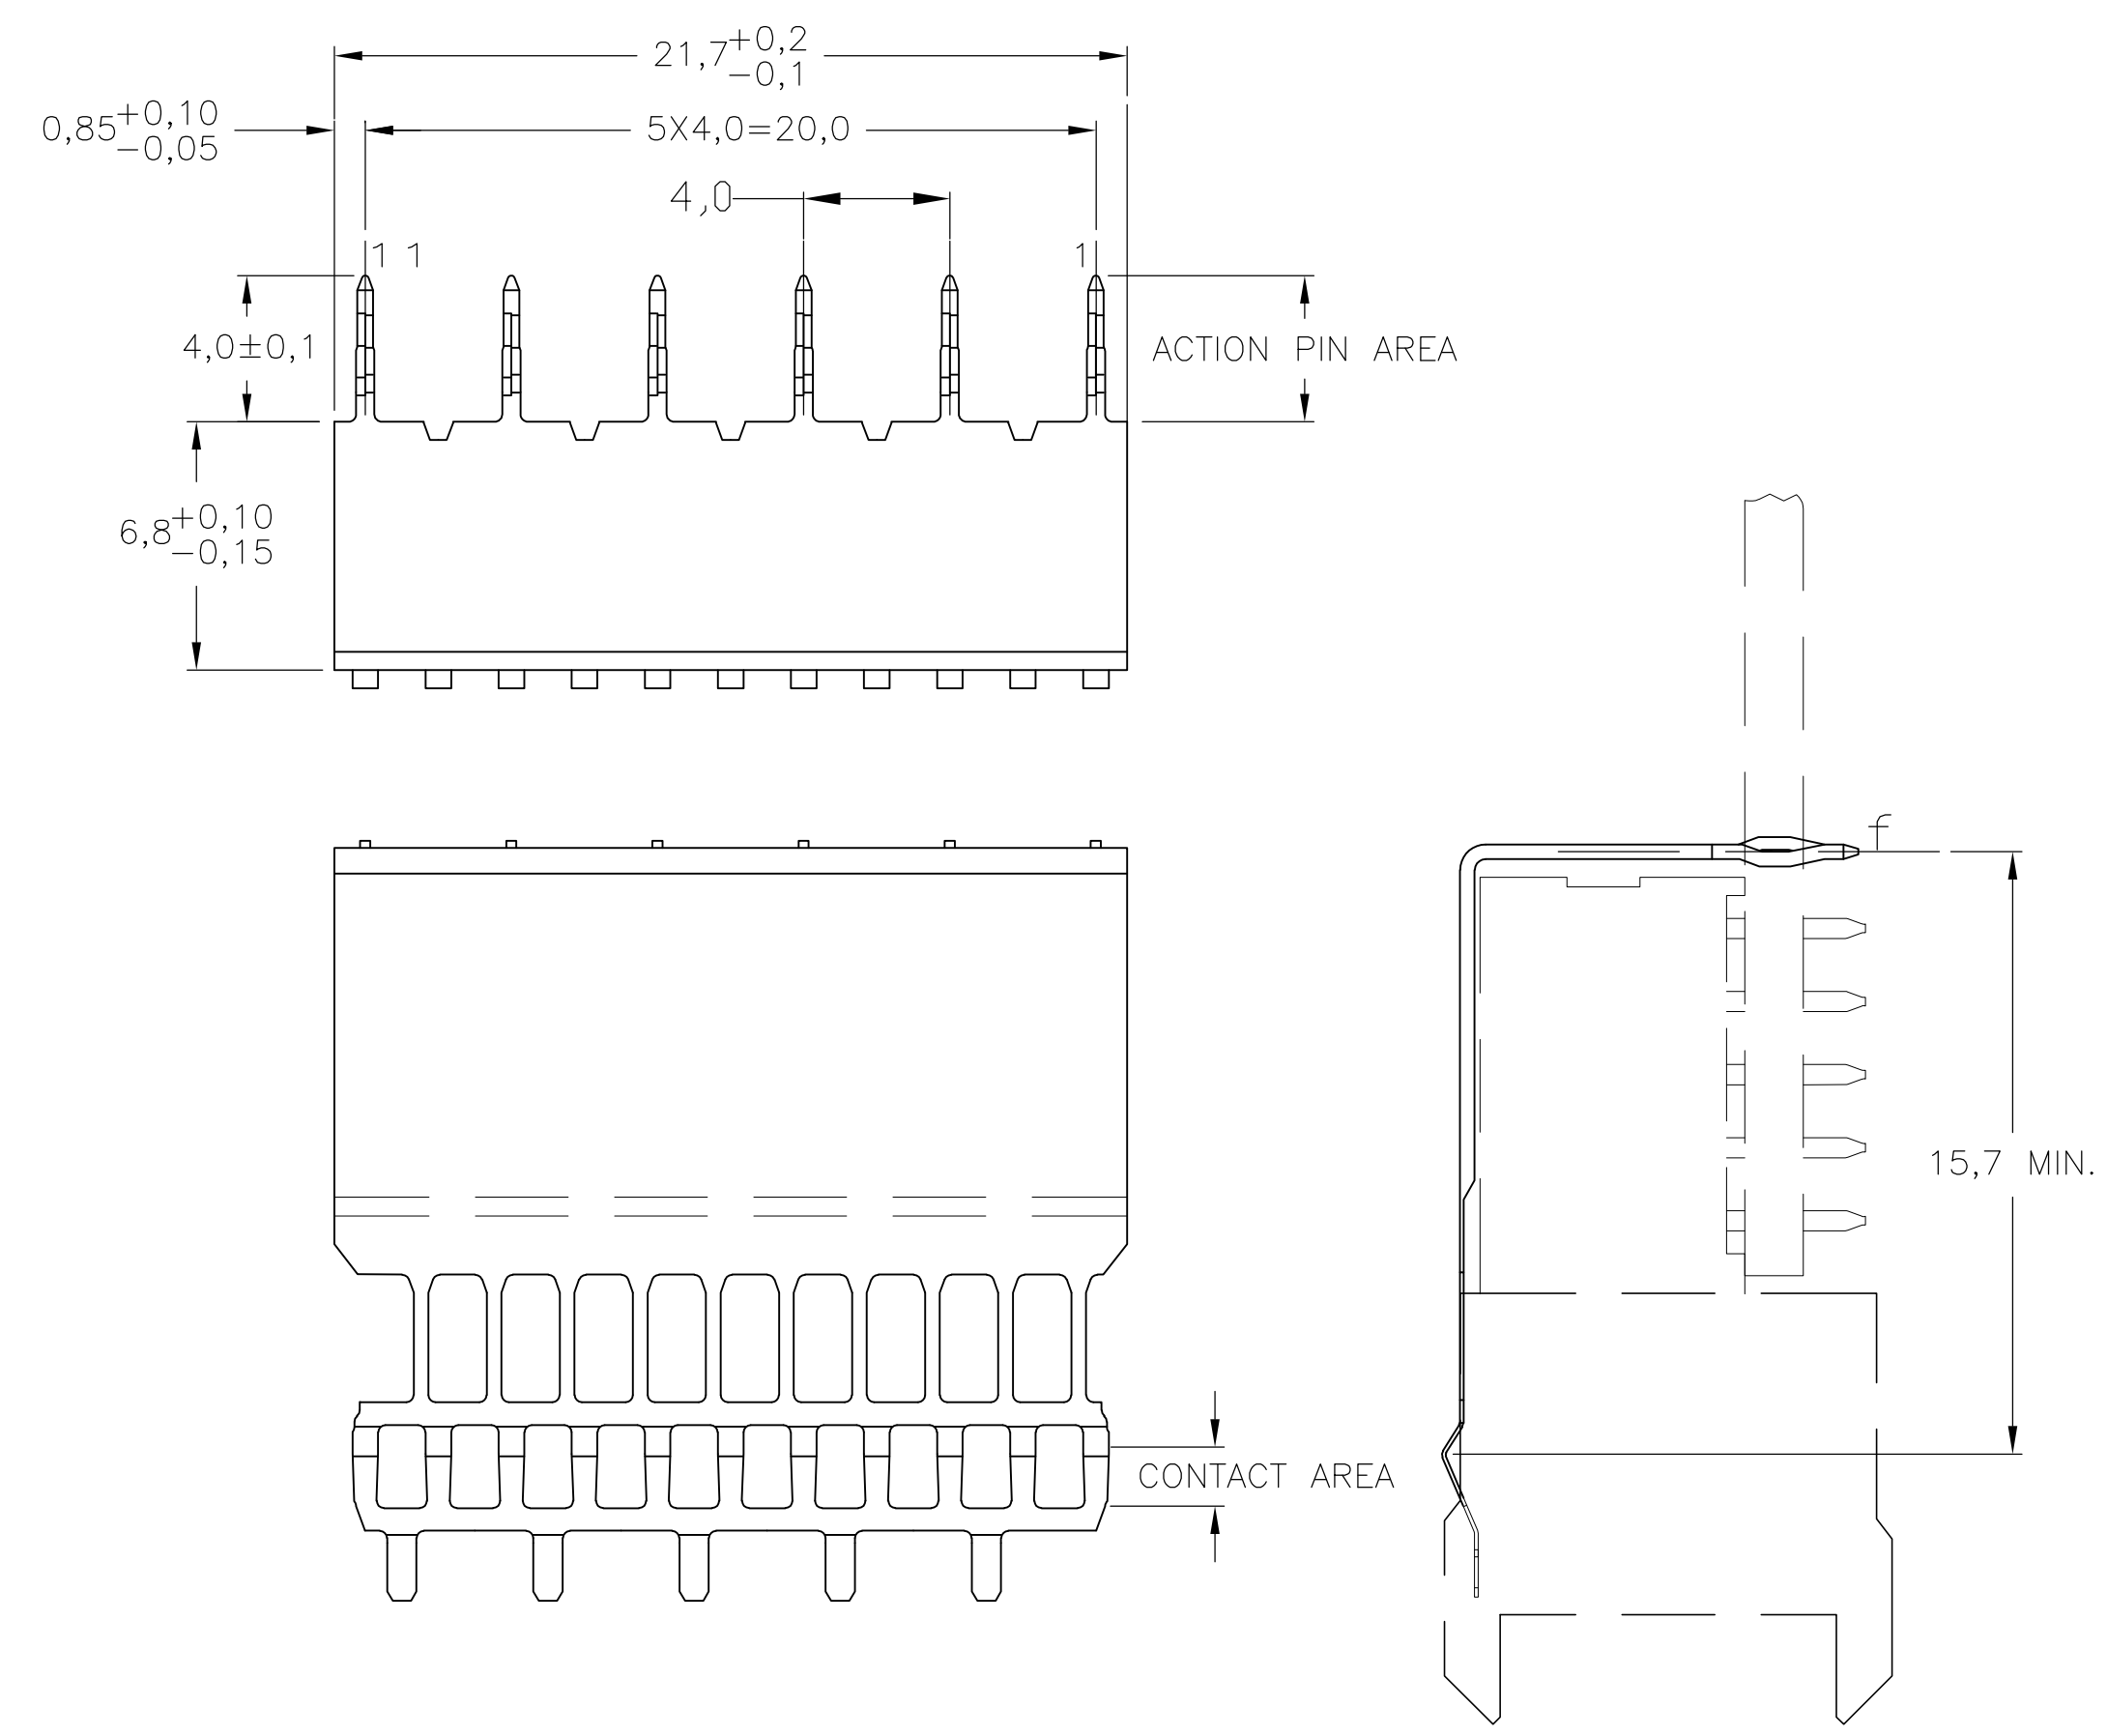

- NOTES:
- 1 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.AND ACTION PIN: 0,5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
 - 2 MATERIAL; PHOSPHORBRONZE.
 - 3 ROW "f" 6 PLATED THROUGH HOLES FOR UPPERSHIELD
 - 4 HOLE PATTERN FOR FEMALE CONNECTOR TYPE C
 - 5 55 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
 - 6 SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
 - 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
 - 8 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - 9 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - 10 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III,CENTRAL OFFICE APPLICATIONS.
 - 11 0.76µm MIN GOLD PLATING AT MATING SURFACE.

6	OBSOLETE	1	7	10	2	8-5352111-4				
		1	5	9	2	-5352111-9				
		1	7		2	5352111-2				
		FINISH		MATERIAL		PARTNUMBER				
DOCUMENT.	DWN K.N.KIRAN	18AUG04		 TE Connectivity						
	CHK B.MOOIJ	25MAR05								
ES, UNLESS SPECIFIED:	APVD B.MOOIJ	25MAR05		NAME Z-PACK 2mm HM GROUND RETURN UPPER SHIELD TYPE C/M						
	PRODUCT SPEC									
	±0.2	108-19082								
		APPLICATION SPEC								
		114-19029								
	WEIGHT	-		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
		A2		00779	C-5352111		-			
CUSTOMER DRAWING					SCALE	5:1	SHEET	1 of 1	REV	D