
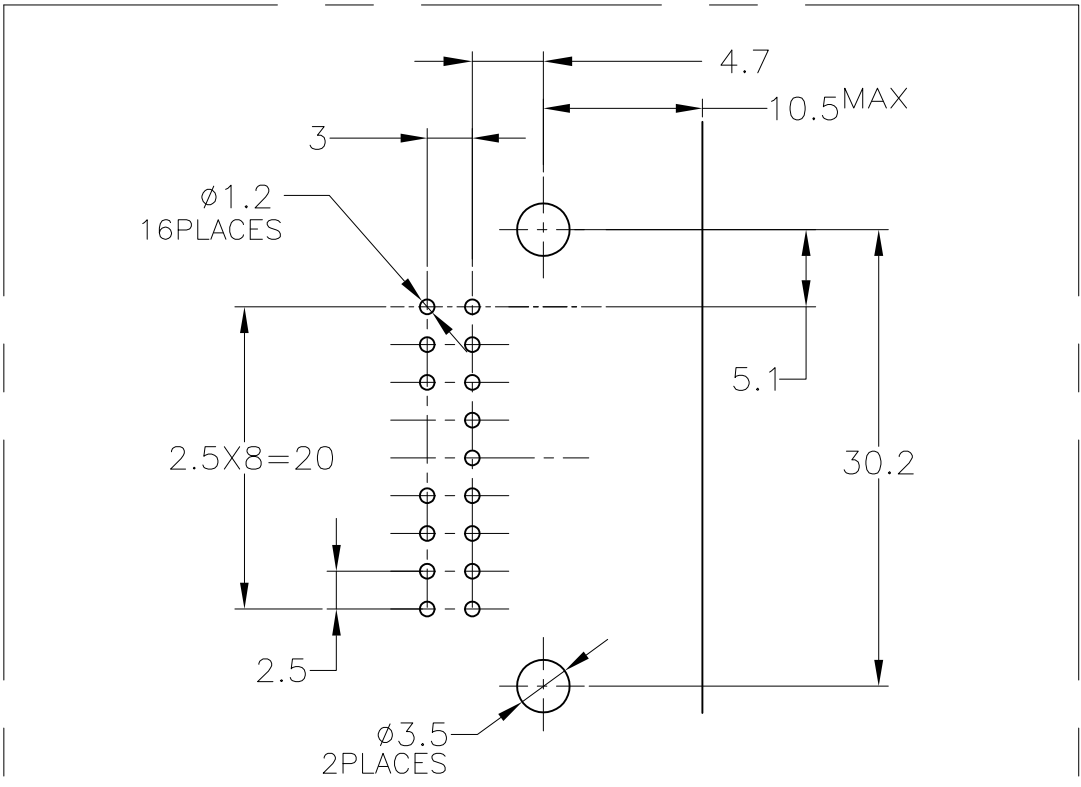
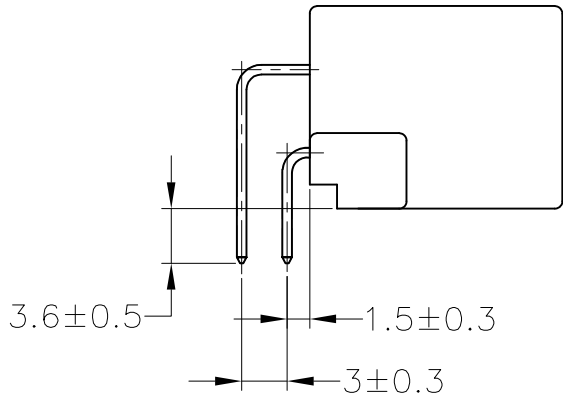


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION		DATE	APVD
J	—		A4	OBSOLETE -2	ECR-07-023693	31OCT07	AY HY

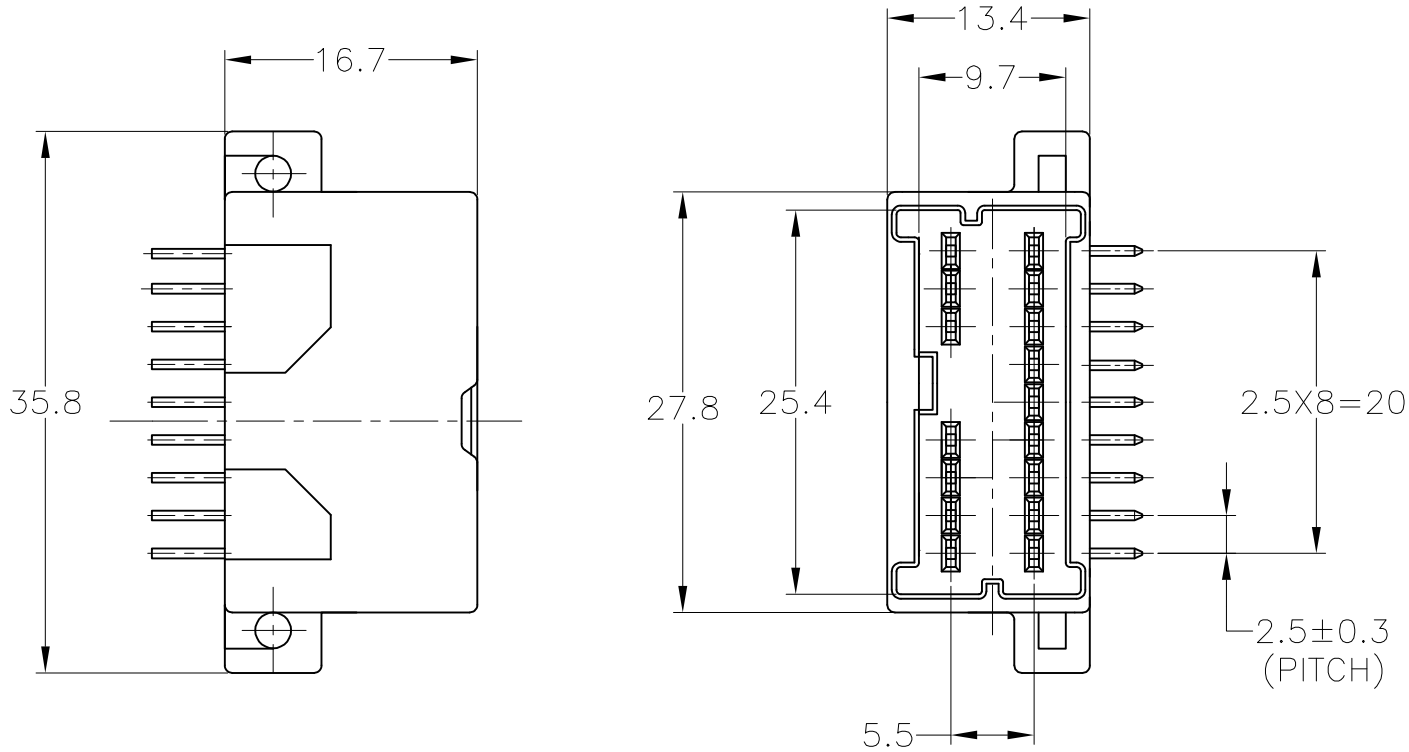


MOUTING DIMENSIONS FOR P.C.BOARD
プリント基板取付け穴寸法

(TOLERANCES: ±0.1
PITCH TOLERANCES MUST NOT ACCUMULATE.)
(公差: ±0.1 ピッチ公差は累積されないこと)

P.C.BOARD THICKNESS
基板厚: 1.6mm

- 1 RECOMMENDED MOUNTING SCREW: PAN-HEADED, TYPE 2 TAPPING SCREW OF 3DIA X 6LENGTH (JIS B1115,B1122), TIGHTENING TORQUE: 39.2N-cmMAX
- 1 推奨取付ネジ: JIS B1115,B1122 タッピングねじ, なべ2種, 呼び径3, 長さ6, 締付トルク: 39.2N-cm以下

TOLERANCE UNLESS OTHERWISE SPECIFIED: 一般公差	
0 < x ≤ 10	±0.2
10 < x ≤ 30	±0.25
30 < x ≤ 100	±0.3
ANGLE ; 角度	±3°

	1123371-1	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT)	NATURAL	1123419-3		
OBSOLETE	SEE DRAWING 1123419-2				1123419-2		
	1123371-1	PRE-TIN		NATURAL	1123419-1		
	MATING HOUSING PART NUMBER 嵌合相手型番	SOLDERING SIDE 半田付け部	CONTACT SUDE 嵌合部側	COLOR 色	PART NUMBER 型番		
		CONTACT FINISH コンタクト仕上					
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.YAMAGUCHI 25JUL03	 Tyco Electronics AMP K.K. Kawasaki, Japan				
DIMENSIONS: 単位: 耗 MM		CHK K.BETSUI 25JUL03					
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD K.BETSUI 25JUL03	NAME 名称 040III MULTILOCK CONNECTOR 16POS CAP HOUSING ASSEMBLY WIRE TO BOARD H-TYPE			
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC 製品規格 108-5603				
			APPLICATION SPEC 取付適用規格				
			WEIGHT 4.4 g				
			MATERIAL 材料 PBT			FINISH 仕上	SIZE A3
COLOR: SEE TABLE		CUSTOMER DRAWING			SCALE 尺度 2:1	SHEET 1 OF 1	REV A4