

DATE	DESCRIPTION	DATE	DATE	DATE
27MAR2015	GF	27MAR2015	GF	SM

DATE	DESCRIPTION	DATE	DATE	DATE
27MAR2015	GF	27MAR2015	GF	SM

NOTES :

△ MATERIALS AND FINISH:

— HOUSING: PA66
— CONTACTS: COPPER ALLOY, FINISH: TIN OVER NICKEL UNDERPLATE

2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)

3. WIRE TYPES AND SIZES ACCEPTED
WIRE RANGE: 14AWG~20AWG(SOLID&STRANDED)
STRIP LENGTH: 7.5mm~8.5mm

4. PACKAGED IN TRAY.

5. CURRENT RATING: 6Amp AC300V.

6. OPERATION TEMPERATURE: -40°C TO +105°C

P/N: *-2834011-*




COLOR CODE: _____

PIN No: _____



SERIES CODE

- 1=GREEN
- 2=BLUE
- 3=BROWN
- 4=ORANGE
- 5=GREY
- 6=RED
- 7=YELLOW
- 8=RED
- 9=WHITE
- 0=BLACK

REMARK: THE DIFFERENT COLORS COULD BE COMBINED TO THE NEW CONNECTOR P/NS FOR CUSTOMER REQUEST.

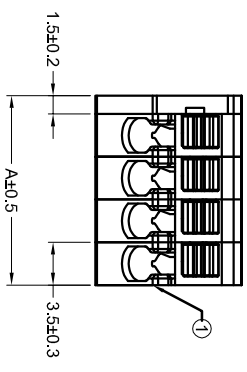

DETAIL INNER

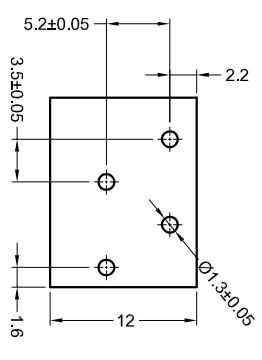

RECOMMEND PCB Layout

REV	DATE	DESCRIPTION	DATE	DATE
A	27MAR2015	GF	27MAR2015	GF
B	27MAR2015	GF	27MAR2015	GF

ADD PART NO.

REV	DATE	DESCRIPTION	DATE	DATE
A	27MAR2015	GF	27MAR2015	GF
B	27MAR2015	GF	27MAR2015	GF

REV	DATE	DESCRIPTION	DATE	DATE
A	27MAR2015	GF	27MAR2015	GF
B	27MAR2015	GF	27MAR2015	GF