





REV.	DATE	DESCRIPTION
NC	05/24/05	INITIAL RELEASE
A	07/31/07	ADD INSULATOR, UPDATE DRAWING FORMAT

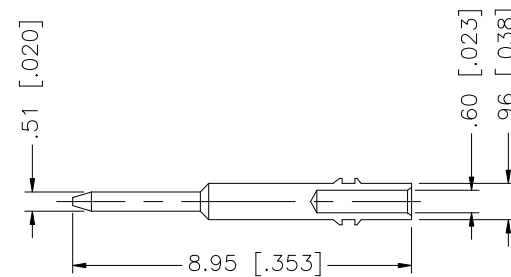

RECOMMENDED
CABLE STRIPPING DIM'S

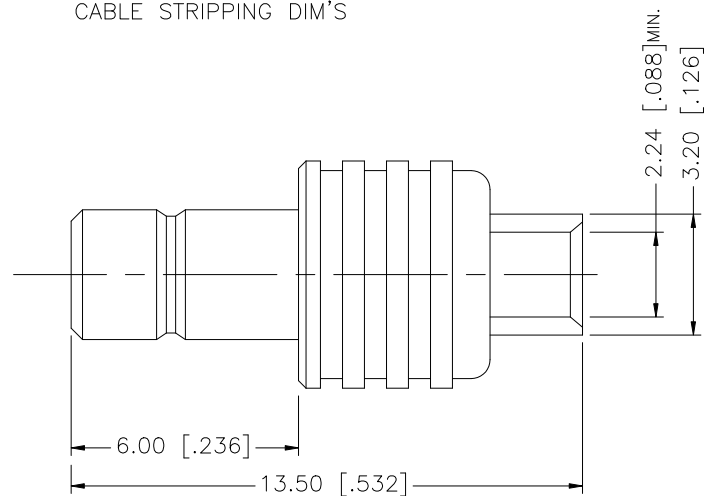

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
8						DRAWN	G.R.S.	07/31/07										
7						CHECKED												
6										PART DESCRIPTION								
5										SMB DIRECT SOLDER JACK (FOR .085”, .086” S/R CABLE)								
4	INSULATOR	TEFLON	NATURAL	1						PART NO.								
3	CONTACT PIN	BRASS	GOLD	1						142253								
2	INSULATOR	TEFLON	NATURAL	1						CAD FILE		DWG. NO.		REV.		SIZE		SCALE
1	BODY	BRASS	GOLD	1					C:/142/142253.DWG		142253.DWG		A		A		NA	
	DESCRIPTION	MATERIAL	FINISH	QTY														