

DO NOT SCALE
DIMENSIONS IN mm


METRIC

THIRD ANGLE
PROJECTION



NOTES:

- 1 FOR USE ON MINIATURE APPLICATOR (LEFT-RIGHT FEED).
- 2 FOR USE ON STANDARD APPLICATOR (RIGHT-LEFT FEED)
- 3 FOR LOOSE-PIECE VERSIONS SEE DWG. 164170.
- 4 UNDERCOATING: 1,3µm Ni.
SELECTIVE : 0,8µm Au.
ZONE I : BRIGHT TIN/LEAD PLATED
- 5 UNDERCOATING: 1,3µm Ni.
SELECTIVE : 0,8µm Au.
REMAINDER : GOLDFLASH.

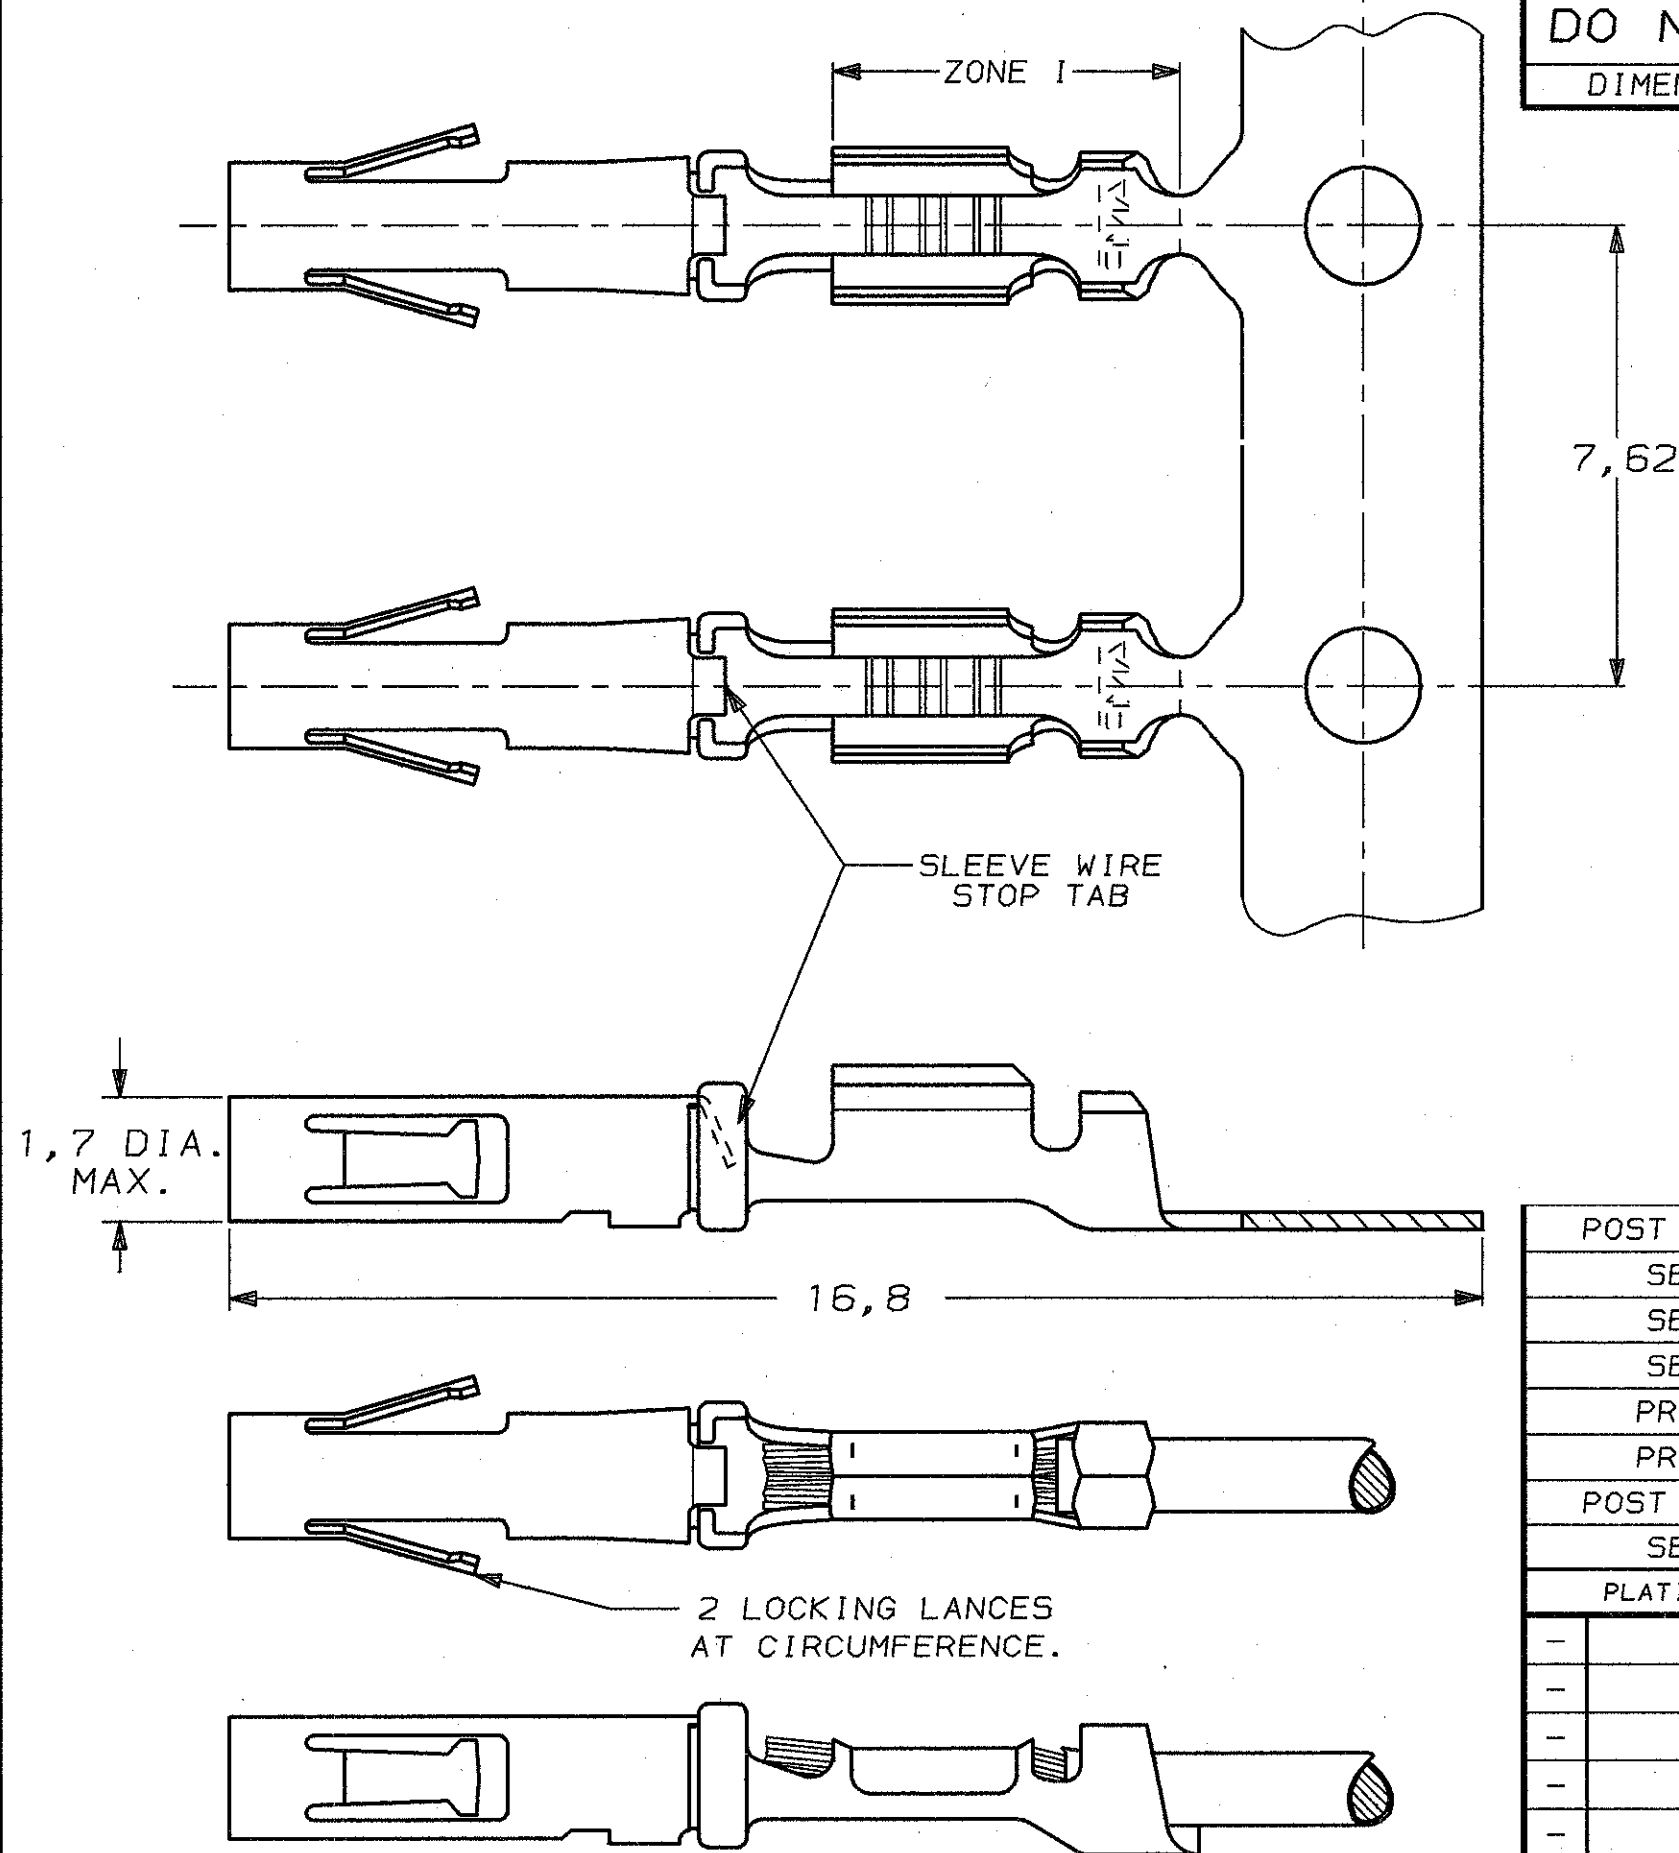

WIRE RANGE :
30-26 AWG 0,05-0,14 mm²
INSULATION RANGE :
1,22 DIA. MAX.

POST TINPLATED	STAINLESS STEEL	BRASS	164155-9	2
SEE NOTE 5			164155-8	2
SEE NOTE 4			164155-7	2
SEE NOTE 4			164155-6	1
PRETINNED			164155-5	2
PRETINNED			164155-4	1
POST TINPLATED			164155-2	1
SEE NOTE 5			164155-1	1
PLATING OF BODY	MATERIAL OF SLEEVE	MATERIAL OF BODY	PARTNUMBER	

CUSTOMER DRAWING					FOR REFERENCE ONLY WILL NOT BE UPDATED				
© COPYRIGHT 19- BY AMP HOLLAND B.V.					ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.				
THIS DRAWING IS UNPUBLISHED					RELEASED FOR PUBLICATION				
AMP					AMP HOLLAND B.V. 's-Hertogenbosch, The Netherlands.				
NAME					HDR SOCKET CONTACT TYPE XI (CRIMP SNAP-IN)				
H	EH-0077-92	JvL	CvT	04-03-94					
LTR.	REVISION RECORD		DR.	CHK.	DATE				
DR.	J.v.LIEMPT	CHK.	C.v.TILBURG	APP.	J.v.SOEEST				
DATE:	6 JAN 1993	DATE:	08-02-93	DATE:	08-02-93				
DWG. No.					C-164155	REV. LTR.	H	SHEET	1 OF 1
						A3			