

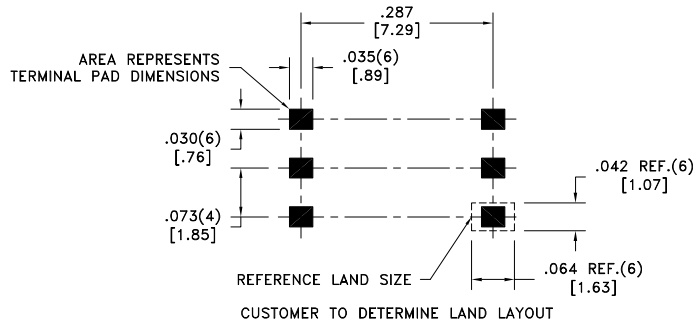



| CUSTOMER TERMINAL | RoHS | LEAD(Pb)-FREE |
|-------------------|------|---------------|
| Sn96%, Ag4%       | Yes  | Yes           |

more than you expect

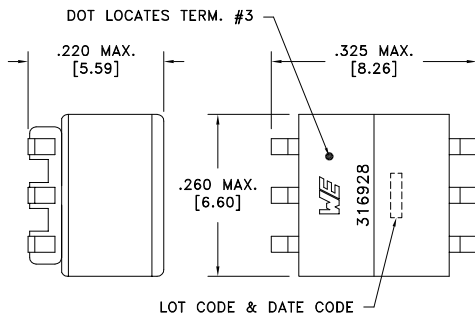

TERM. NO.'s FOR REF. ONLY



### ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

| PARAMETER       | TEST CONDITIONS        | VALUE            |
|-----------------|------------------------|------------------|
| D.C. RESISTANCE | 1-3 @20°C              | 0.159 ohms ±10%  |
| D.C. RESISTANCE | 4-6 @20°C              | 1.03 ohms ±10%   |
| INDUCTANCE      | 4-6 10kHz, 100mVAC, Ls | 239uH ±8%        |
| DIELECTRIC      | 3-4 500VAC, 1 second   | 500VAC, 1 minute |
| URNS RATIO      | (4-6):(3-1)            | 4.5:1, ±1%       |
| URNS RATIO      | (4-6):(2-1)            | 9:1, ±1%         |

### GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Safety standard undefined.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

| REV. | DATE | Packaging Specifications              |
|------|------|---------------------------------------|
|      |      | Method: Tape & Reel                   |
|      |      | PKG-0637                              |
|      |      | www.we-online.com/midcom              |
| 6B   | 2/18 |                                       |
| 6A   | 9/17 | SEE REVISION SHEET FOR REVISION LEVEL |



Tolerances unless otherwise specified:  
Angles: ±1°  
Fractions: ±1/64  
Decimals: ±.005 [.13]  
Footprint: ±.005 [.13]  
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

**TRANSFORMER**

eiSos p/n: 750316928



PART NO.

**750316928**

SPECIFICATION SHEET 1 OF 1