



SIDE VIEW

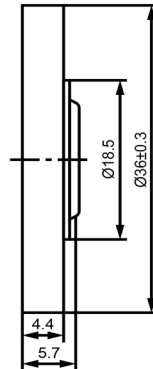

BOTTOM VIEW

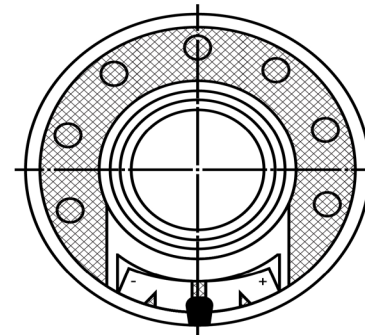

| Specifications                                                                      |              |       | Notes                                                                        | Revision History |                           |            |            |            |             |            |
|-------------------------------------------------------------------------------------|--------------|-------|------------------------------------------------------------------------------|------------------|---------------------------|------------|------------|------------|-------------|------------|
| Description                                                                         | Value        | Unit  |                                                                              | Version          | Description               |            | Date       | Approved   |             |            |
| Shape                                                                               | Round        |       | 1) All dimensions are in mm unless otherwise noted<br>2) All parts meet RoHS | 1                | Released from Engineering |            | 10/21/2013 | J.S        |             |            |
| Resonant Frequency                                                                  | 150          | (Hz)  |                                                                              |                  |                           |            |            |            |             |            |
| Frequency Range                                                                     | 150 ~ 20,000 | (Hz)  |                                                                              |                  |                           |            |            |            |             |            |
| SPL @ 10cm                                                                          | 98           | (dBA) |                                                                              |                  |                           |            |            |            |             |            |
| Impedance                                                                           | 32           | (Ohm) |                                                                              |                  |                           |            |            |            |             |            |
| Cone Material                                                                       | Mylar        |       |                                                                              |                  |                           |            |            |            |             |            |
| Nominal Power                                                                       | 0.05         | (W)   |                                                                              |                  |                           |            |            |            |             |            |
| Max Power                                                                           | 0.1          | (W)   |                                                                              |                  |                           |            |            |            |             |            |
| Mount Type                                                                          | Flush        |       |                                                                              |                  |                           |            |            |            |             |            |
| Operating Temperature                                                               | -25 ~ +55    | °C    |                                                                              |                  |                           |            |            |            |             |            |
| Storage Temperature                                                                 | -25 ~ +55    | °C    |                                                                              |                  |                           |            |            |            |             |            |
| Weight                                                                              | 6.5          | (g)   |                                                                              |                  |                           |            |            |            |             |            |
|  |              |       |                                                                              | Drawn by         |                           | Date       | Checked by | Date       | Approved by | Date       |
|                                                                                     |              |       |                                                                              | A.B.             |                           | 10/21/2013 | C.E.       | 10/21/2013 | J.S         | 10/21/2013 |
|                                                                                     |              |       | Dynamic Speaker                                                              |                  |                           |            | SM360132-1 |            |             |            |