





LOC		DIST		REVISIONS			
		P	LTN	DESCRIPTION	DATE	DWN	APVD
		A		INITIAL RELEASE	13JUN2019	AJ	SH

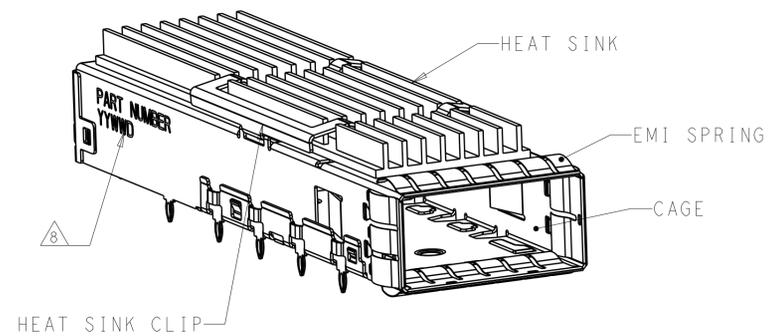



2342933-1 AS SHOWN
SCALE 3:1

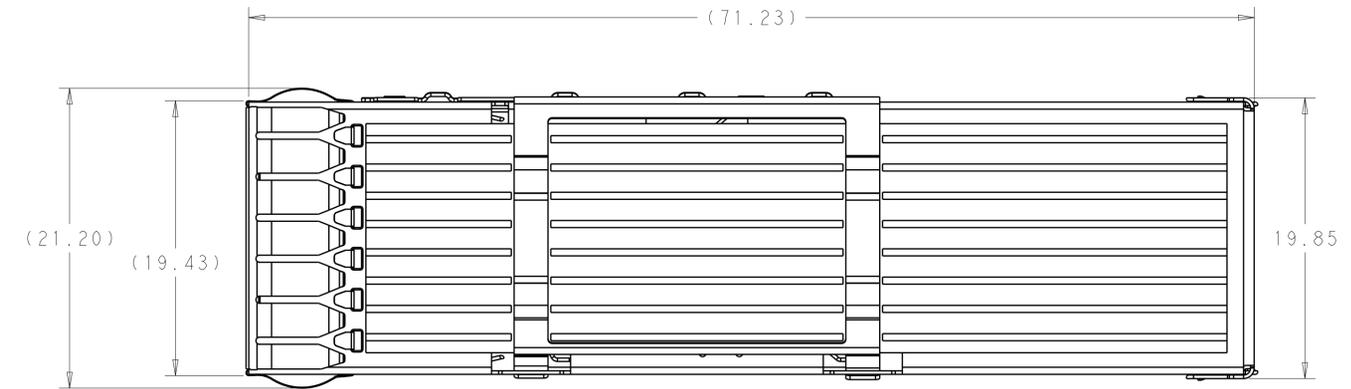

1. MATERIAL:
CAGE MATERIAL : 0.25 THICK STAINLESS STEEL.
SPRING MATERIAL: COPPER ALLOY
CLIP MATERIAL: STAINLESS STEEL
HEAT SINK: ALUMINUM
2. FINISH:
SPRING: NICKEL PLATING
HEAT SINK: BLACK ANODIZATION
3. DIMENSION APPLIES WITH MODULE INSTALLED IN THE CAGE TO TOP OF HEAT SINK.
4. REFERENCE APPLICATION SPEC 114-60025 FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
5. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMERS.
6. MINIMUM PC BOARD THICKNESS : SINGLES SIDED: 1.57 MIN
DOUBLE SIDED: 3.00 MIN
7. DATUM **-A-** IS TOP SURFACE OF THE HOST BOARD.
8. DATE CODE (YYWWD) MARKED APPROXIMATELY AS SHOWN
9. MATES WITH QSFP DD MSA COMPATIBLE TRANSCEIVER.

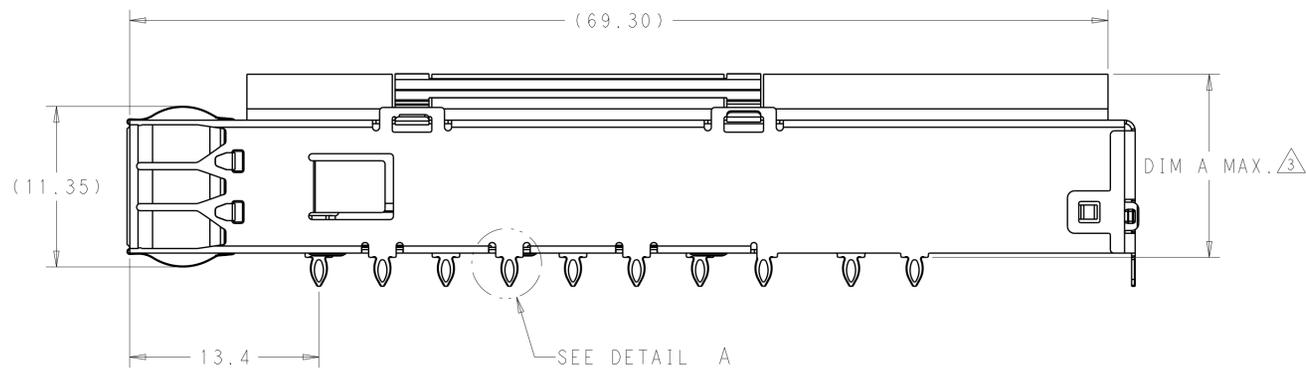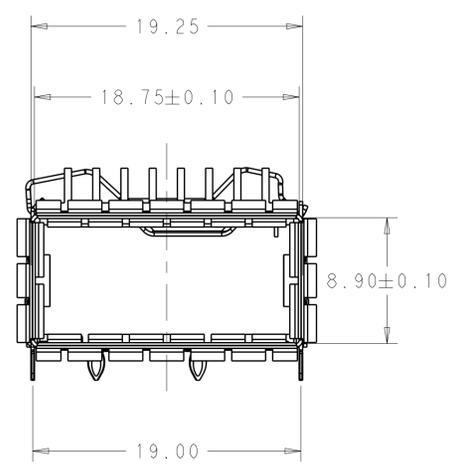

2342933-1 AS SHOWN
SCALE 4:1

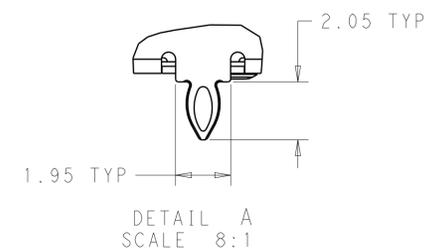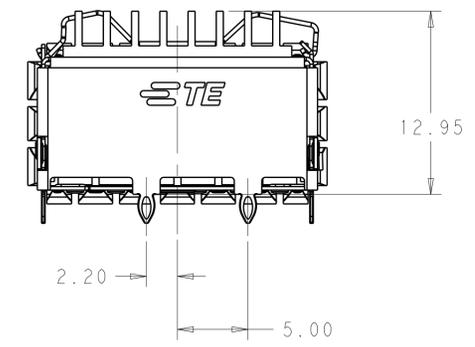


DETAIL A
SCALE 8:1


23.00	2	NETWORKING	2342933-3
16.00	2	SAN	2342933-2
13.70	2	PCI	2342933-1
DIM A	# REAR PINS	APPLICATION (HEAT SINK OPTION)	PART NUMBER

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN		CHK		APVD		NAME	
mm	0 PLC	±0.25		ARTHUR JIN	29AUG2018	SEAN HAN	29AUG2018	SEAN HAN	29AUG2018	SEAN HAN	29AUG2018
	1 PLC	±0.25									
	2 PLC	±0.25									
	3 PLC	±0.20									
	4 PLC	±0.10									
	ANGLES	±°									
MATERIAL	FINISH										
CUSTOMER DRAWING				SCALE	2:1	SHEET	1	OF	5	REV	A


LOC		DIST		REVISIONS			
				REV	DATE	BY	APPD
-	-	-	-	-	-	-	-
-	-	-	-	-	SEE SHEET 1	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

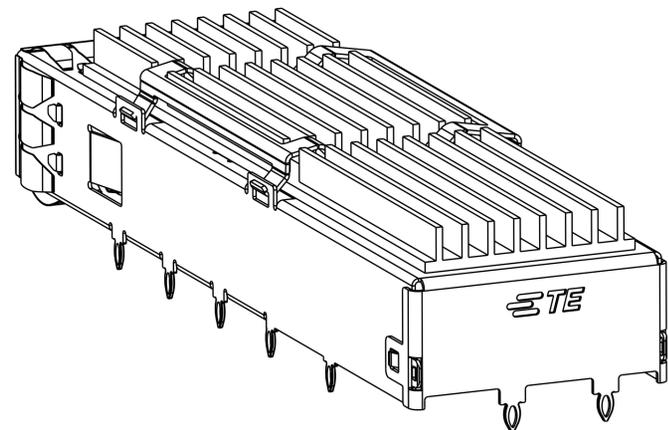

2342933-1 AS SHOWN
 WITH PCI HEAT SINK
 SCALE 4:1

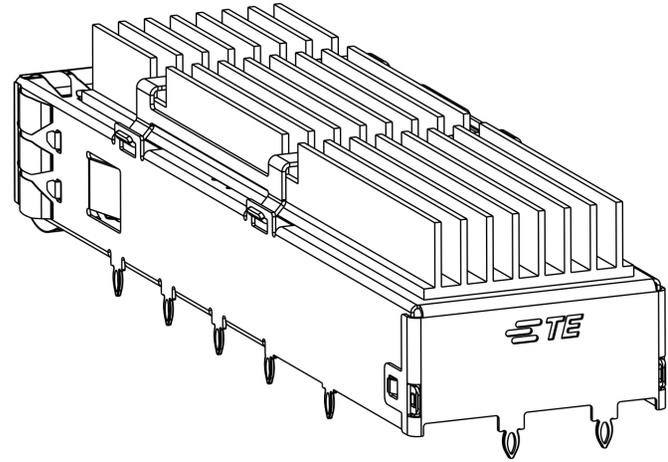





2342933-2 AS SHOWN
 WITH SAN HEAT SINK
 SCALE 4:1

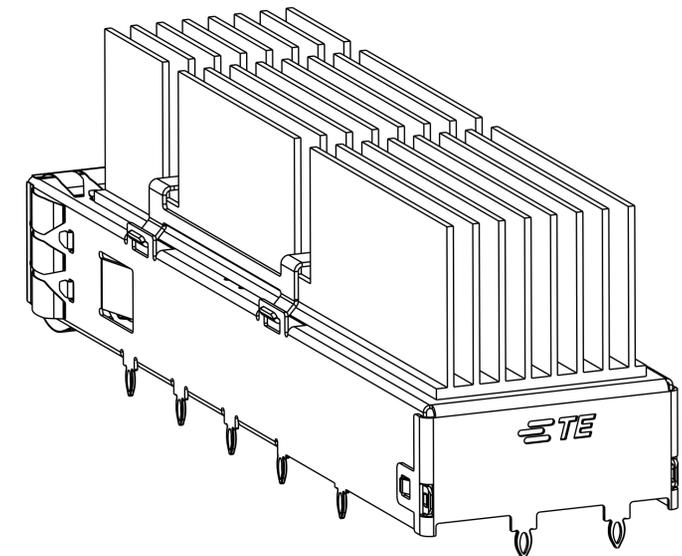

2342933-3 AS SHOWN
 WITH NETWORKING HEAT SINK
 SCALE 4:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: ARTHUR JLN 29AUG2018	TE Connectivity
		CHK: SEAN HAN 29AUG2018	
		APPD: SEAN HAN 29AUG2018	NAME: CAGE ASSEMBLY, QSFP-DD STANDARD WITH EMI SPRING FINGER
		PRODUCT SPEC: 108-60122	
		APPLICATION SPEC: 114-60025	SIZE: A1
		WEIGHT: -	SCALE: 2:1
		CUSTOMER DRAWING	SHEET 2 OF 5
			REV A



LOC		DIST		REVISIONS			
				DESCRIPTION	DATE	DWN	APVD
-	-	-	-	SEE SHEET 1	-	-	-

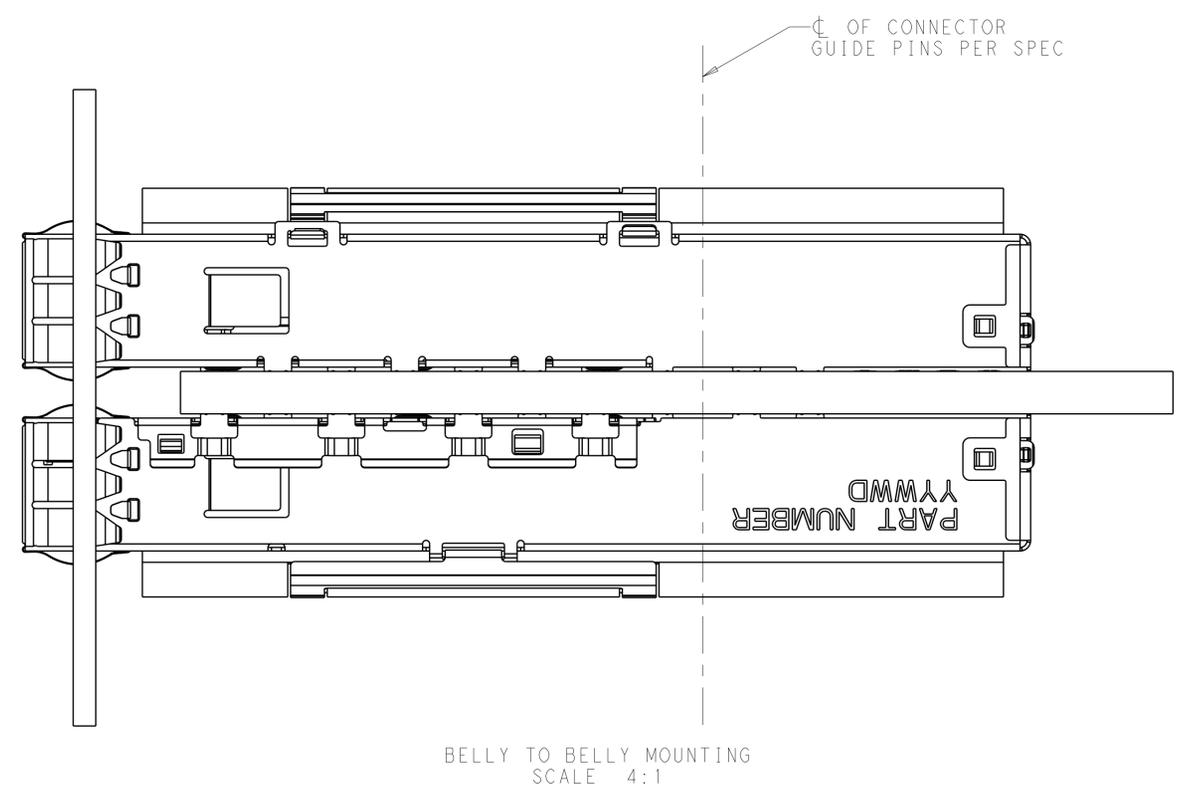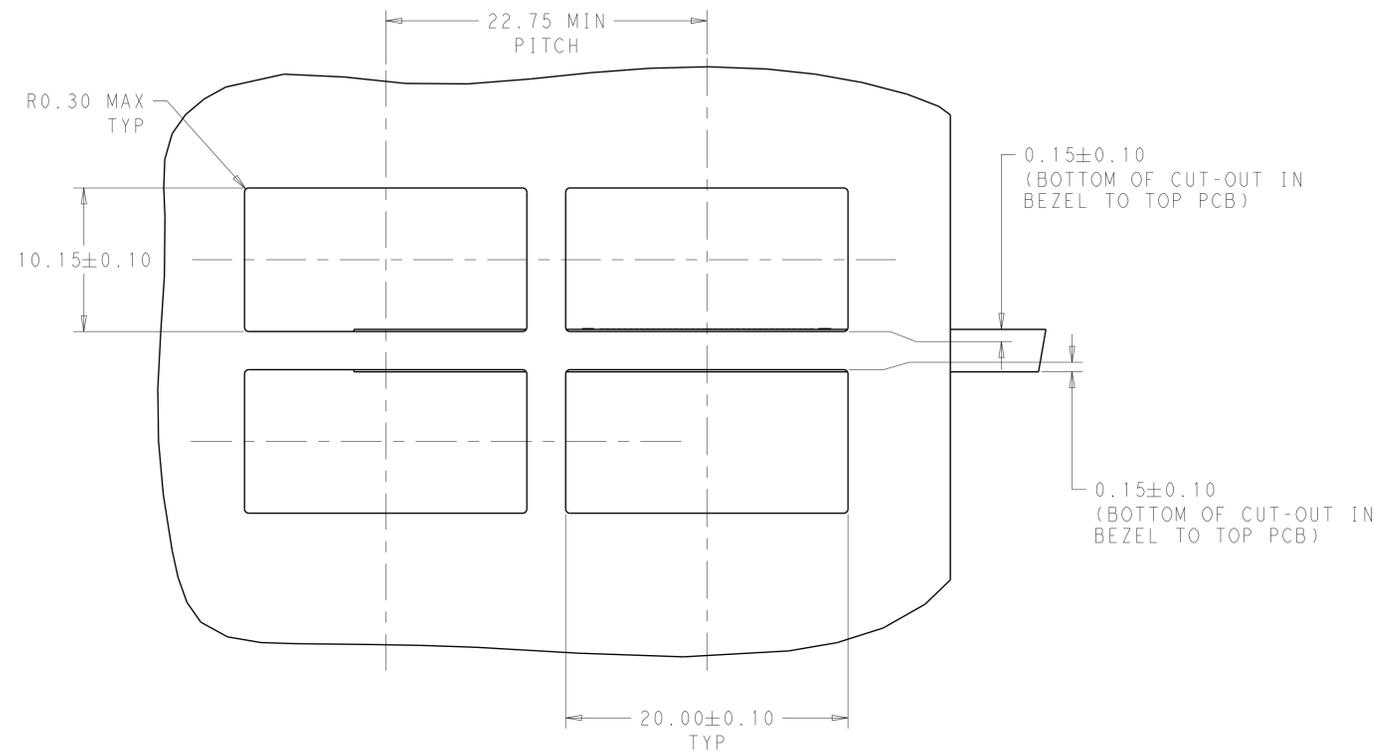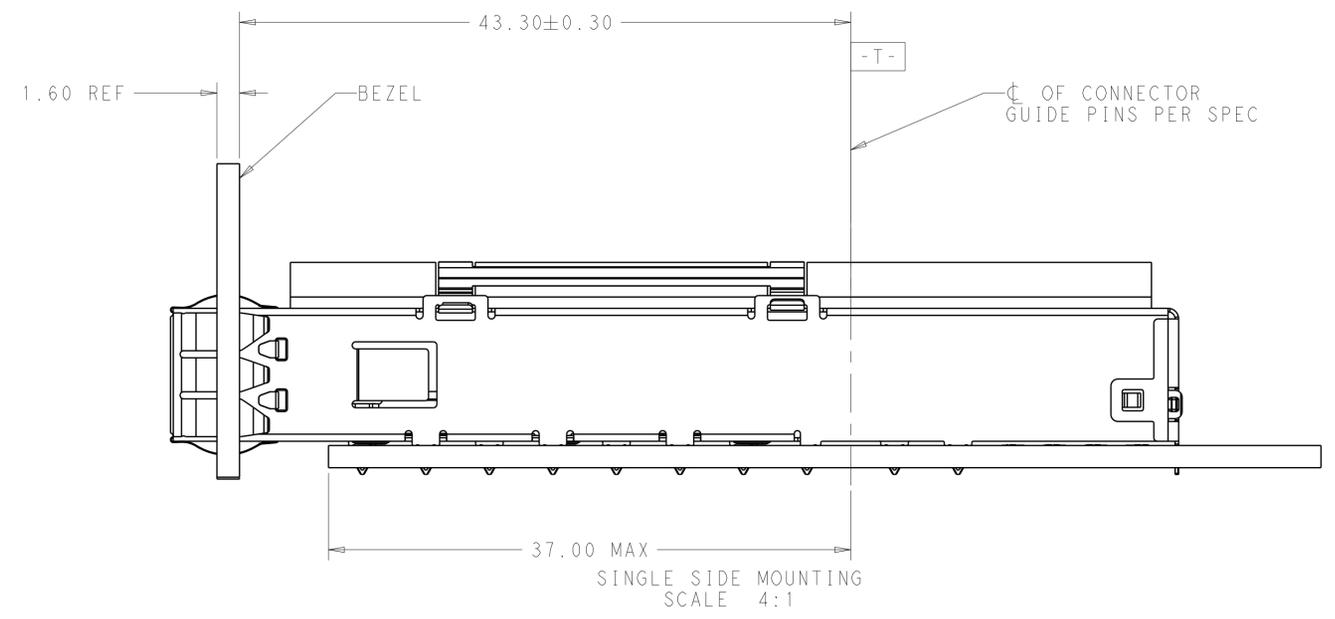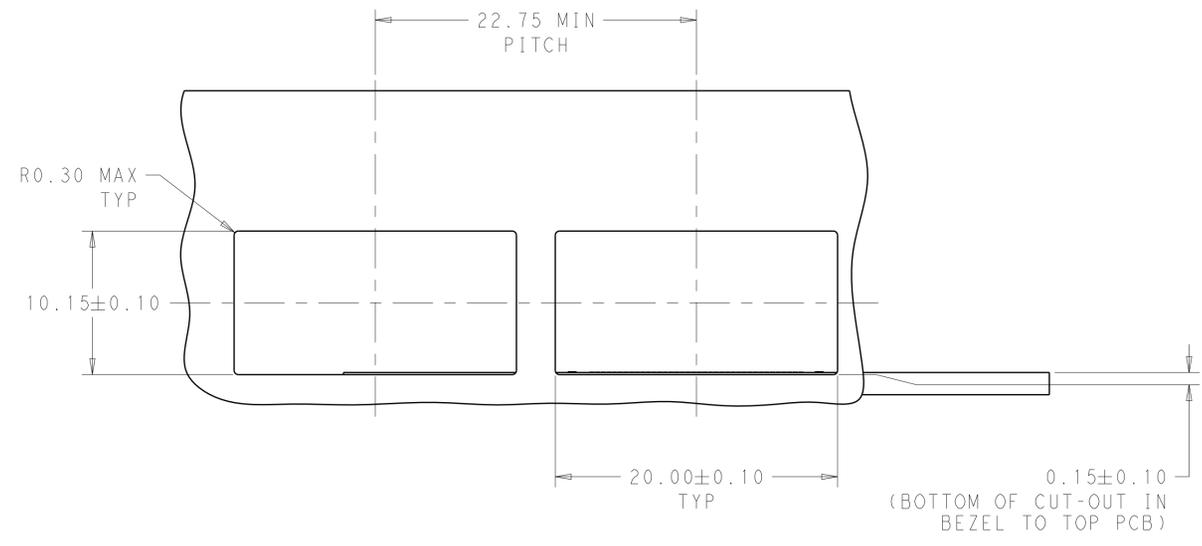

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: ARTHUR JLN 29AUG2018	TE Connectivity
DIMENSIONS: mm		CHK: SEAN HAN 29AUG2018	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: SEAN HAN 29AUG2018	NAME: CAGE ASSEMBLY, QSFP-DD STANDARD WITH EMI SPRING FINGER
0 PLC	±0.25	PRODUCT SPEC	SIZE: A1
1 PLC	±0.25	APPLICATION SPEC	CAGE CODE: 2342933
2 PLC	±0.20	114-60025	RESTRICTED TO: -
3 PLC	±0.10	WEIGHT: -	SCALE: 2:1
4 PLC	±	CUSTOMER DRAWING	SHEET 3 OF 5
ANGLES	±		REV A

LOC	DIST	REV	DATE	BY	APPV
-	-	1	-	-	-

REVISIONS			
NO.	DESCRIPTION	DATE	BY
1	SEE SHEET 1	-	-

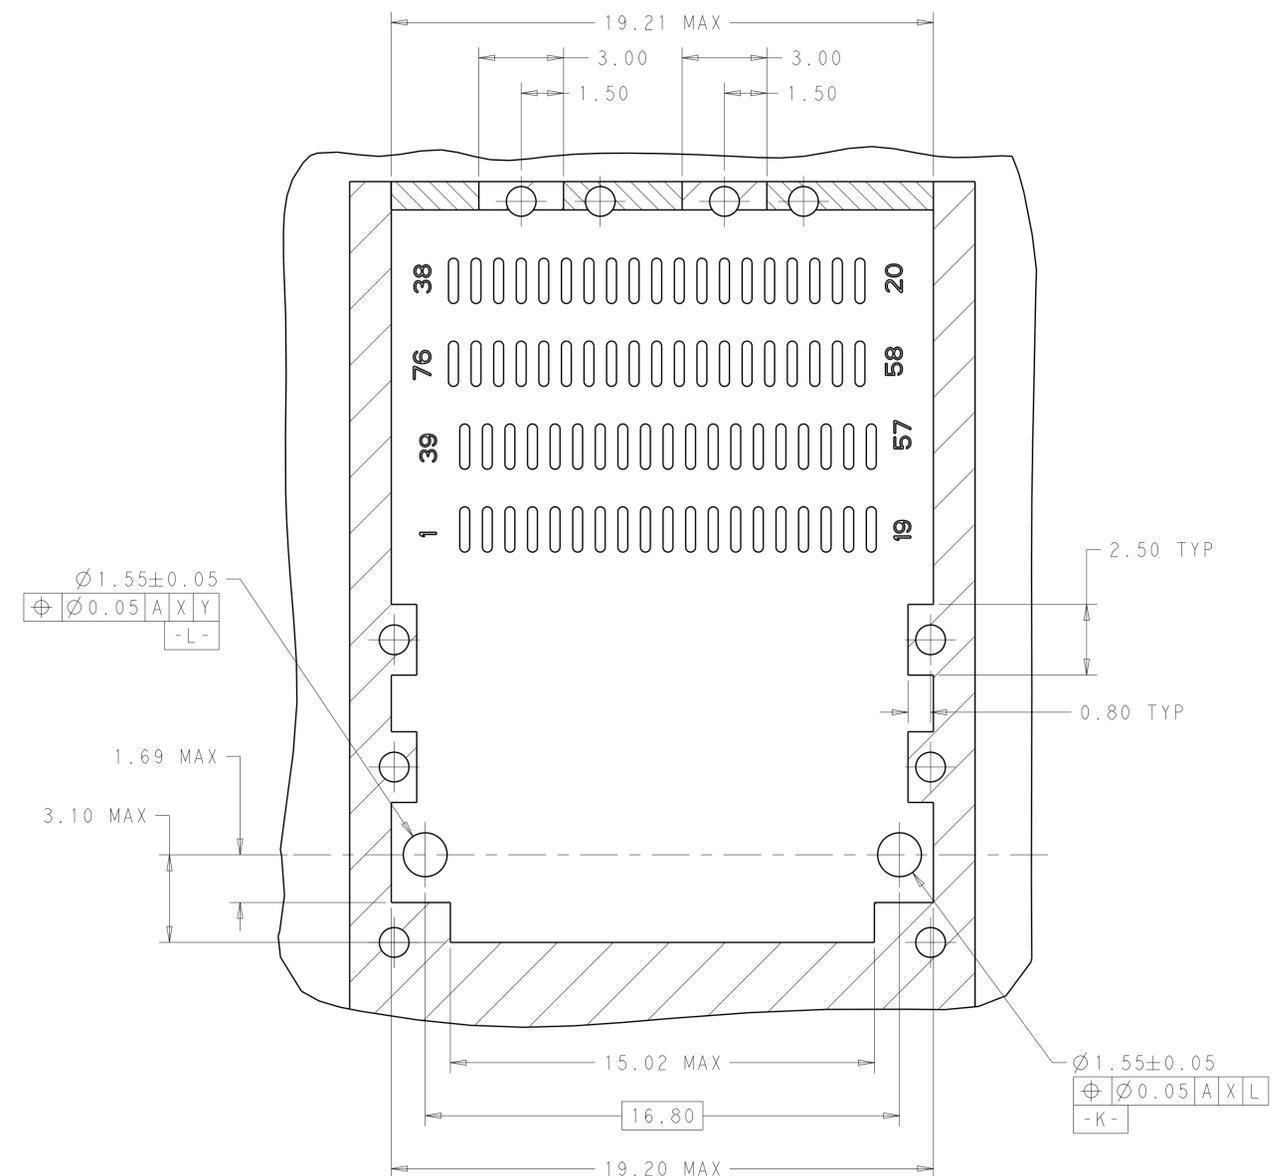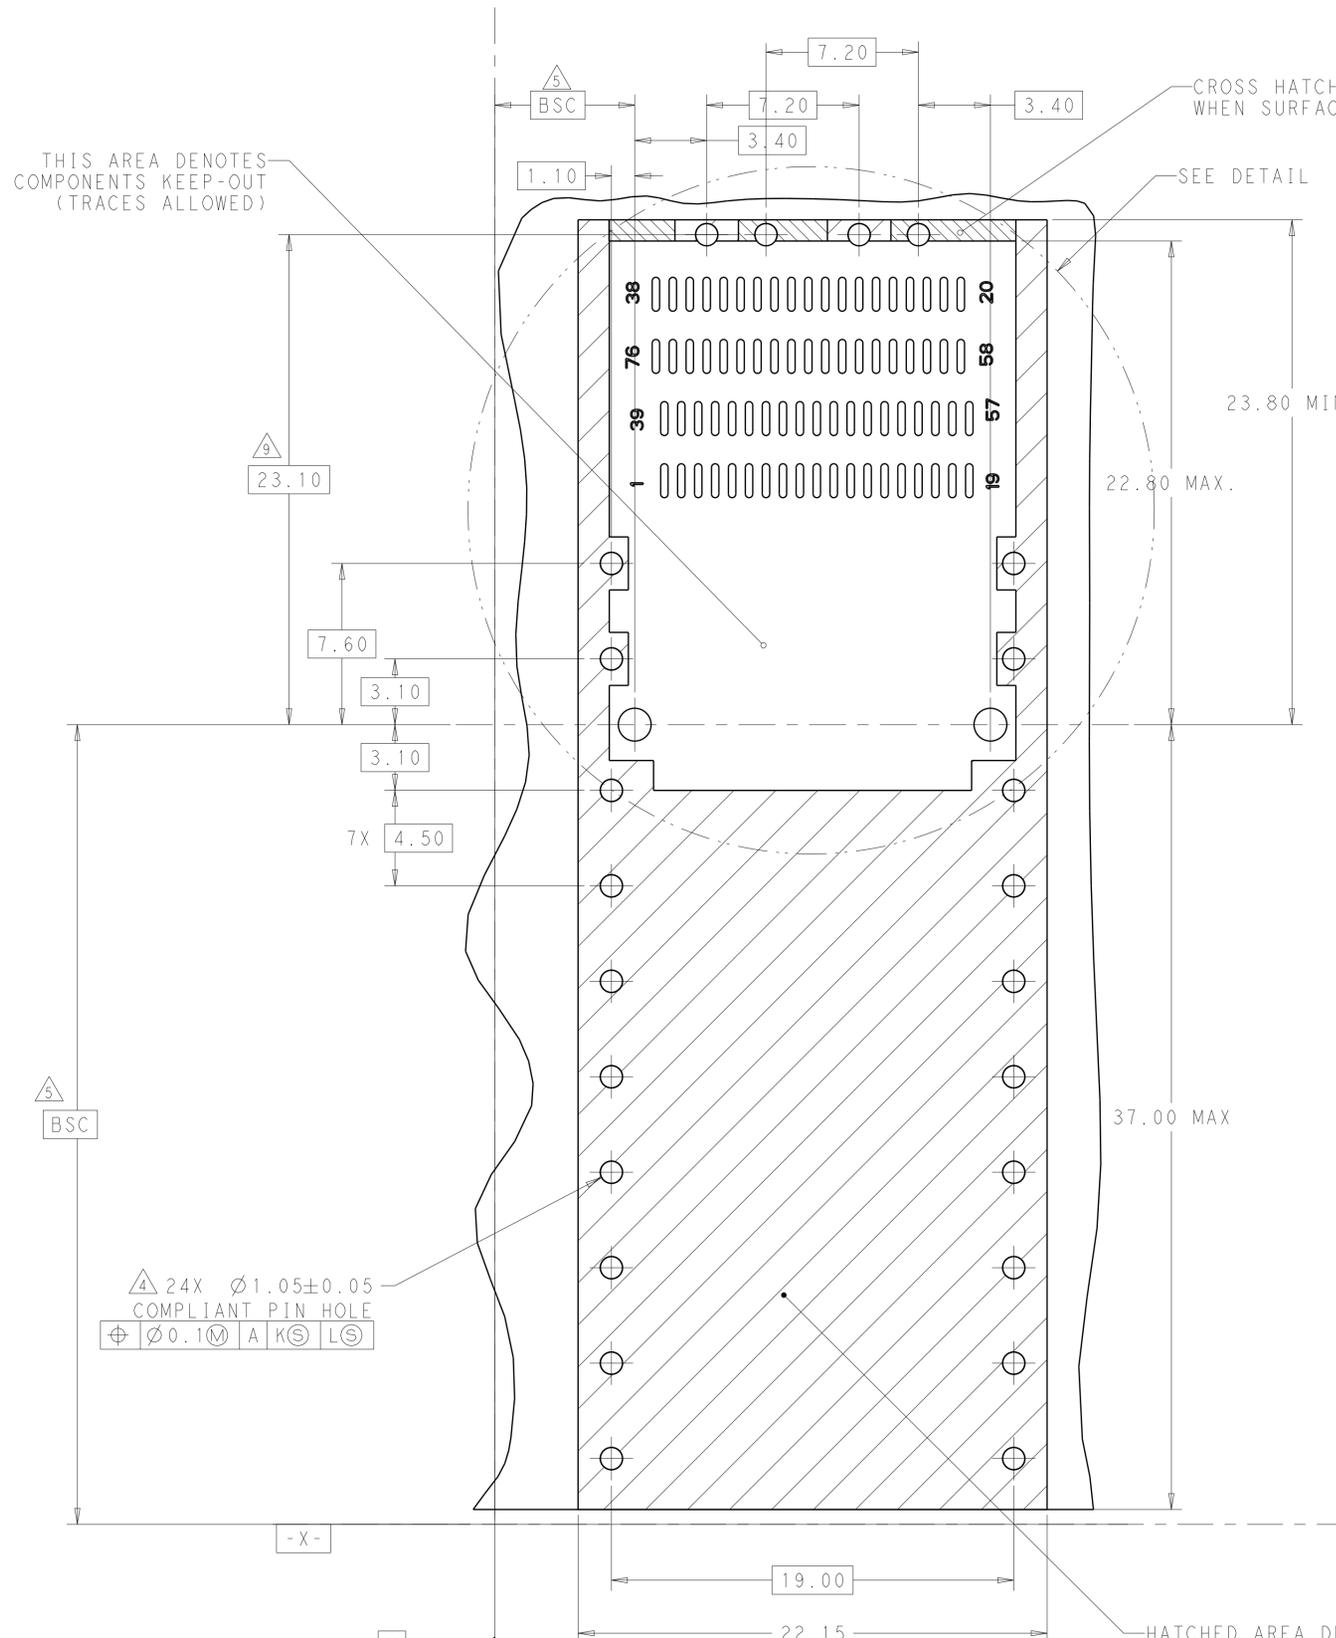

DETAIL C
SCALE 8:1

RECOMMENDED PCB LAYOUT
BELLY TO BELLY TYPE OF 2 REAR HOLES OF LEGS
PCB TOLERANCE: ±0.05
SCALE 6:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: ARTHUR JLN 29AUG2018	TE Connectivity
DIMENSIONS: mm		CHK: SEAN HAN 29AUG2018	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPV: SEAN HAN 29AUG2018	NAME: CAGE ASSEMBLY, QSFP-DD STANDARD WITH EMI SPRING FINGER
0 PLC ±0.25	1 PLC ±0.25	PRODUCT SPEC: 108-60122	SIZE: A1
2 PLC ±0.20	3 PLC ±0.20	APPLICATION SPEC: 114-60025	CAGE CODE: -
4 PLC ±0.10	ANGLES ±°	WEIGHT: -	DRAWING NO: C=2342933
MATERIAL: -	FINISH: -	CUSTOMER DRAWING	RESTRICTED TO: -
SCALE: 2:1			SHEET: 5 OF 5
REV: A			