

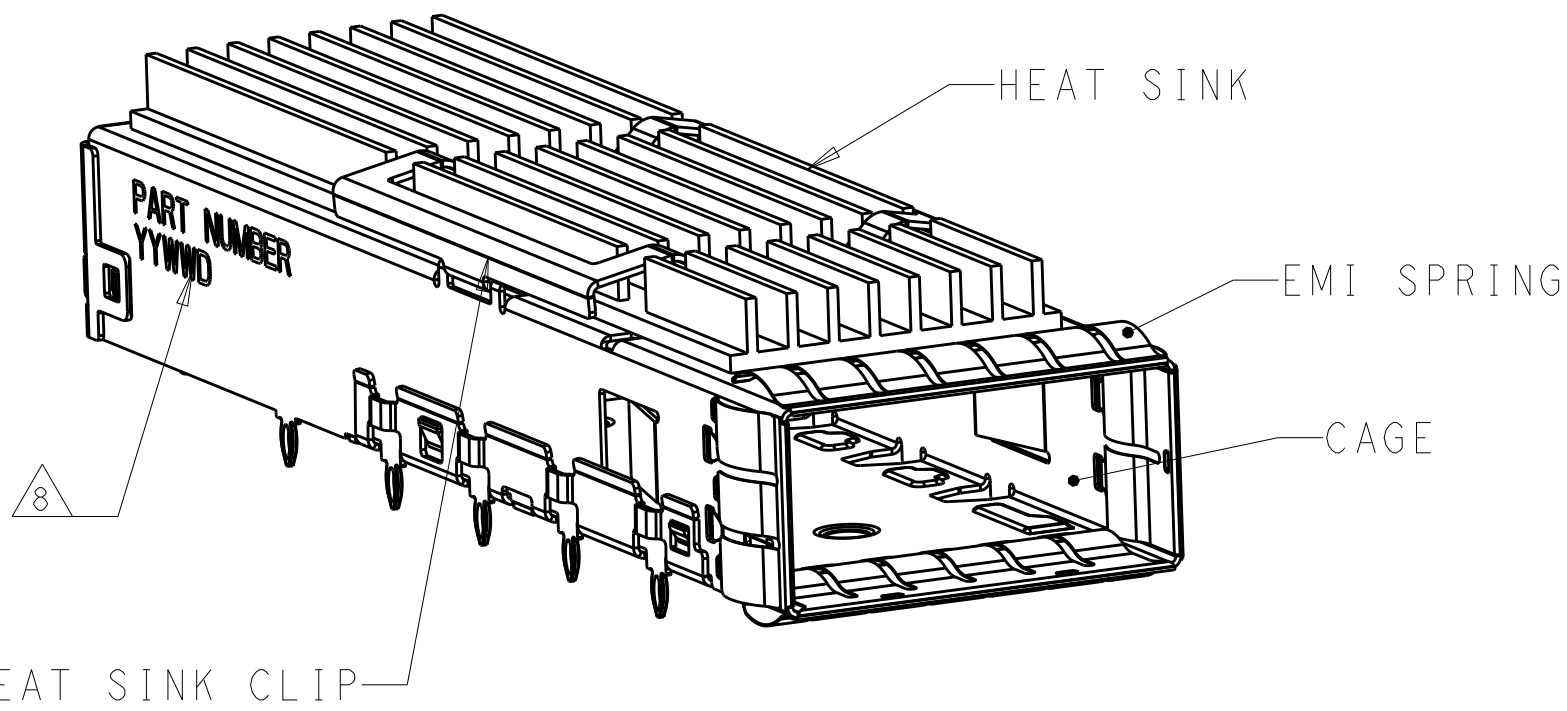
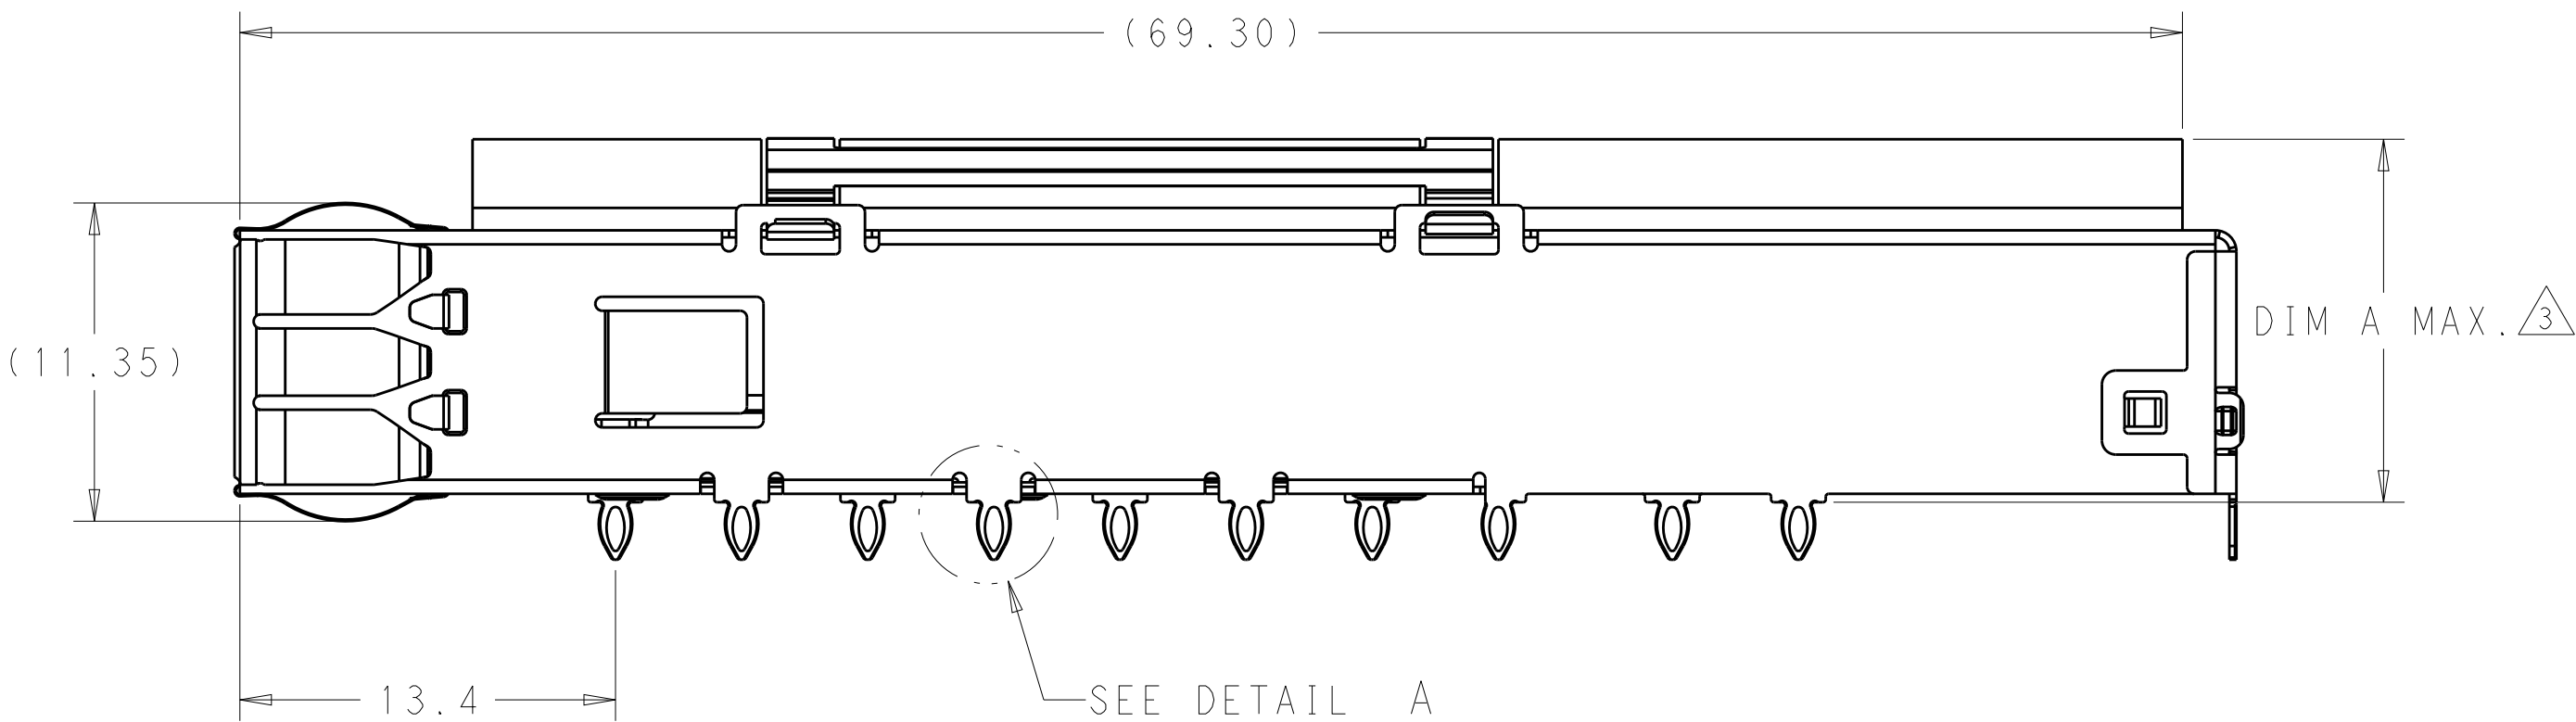




2		1				
LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
		A		INITIAL RELEASE	13JUN2019	AJ SH

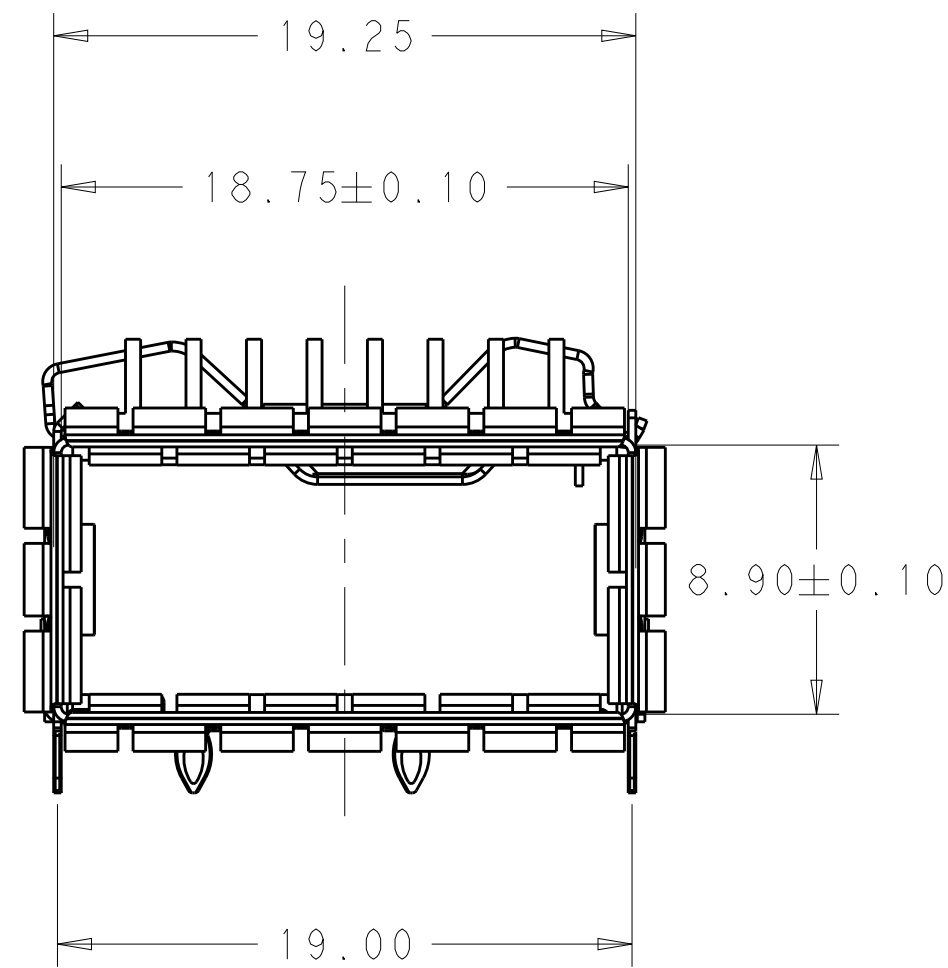

2342933-1 AS SHOWN
SCALE 3:1

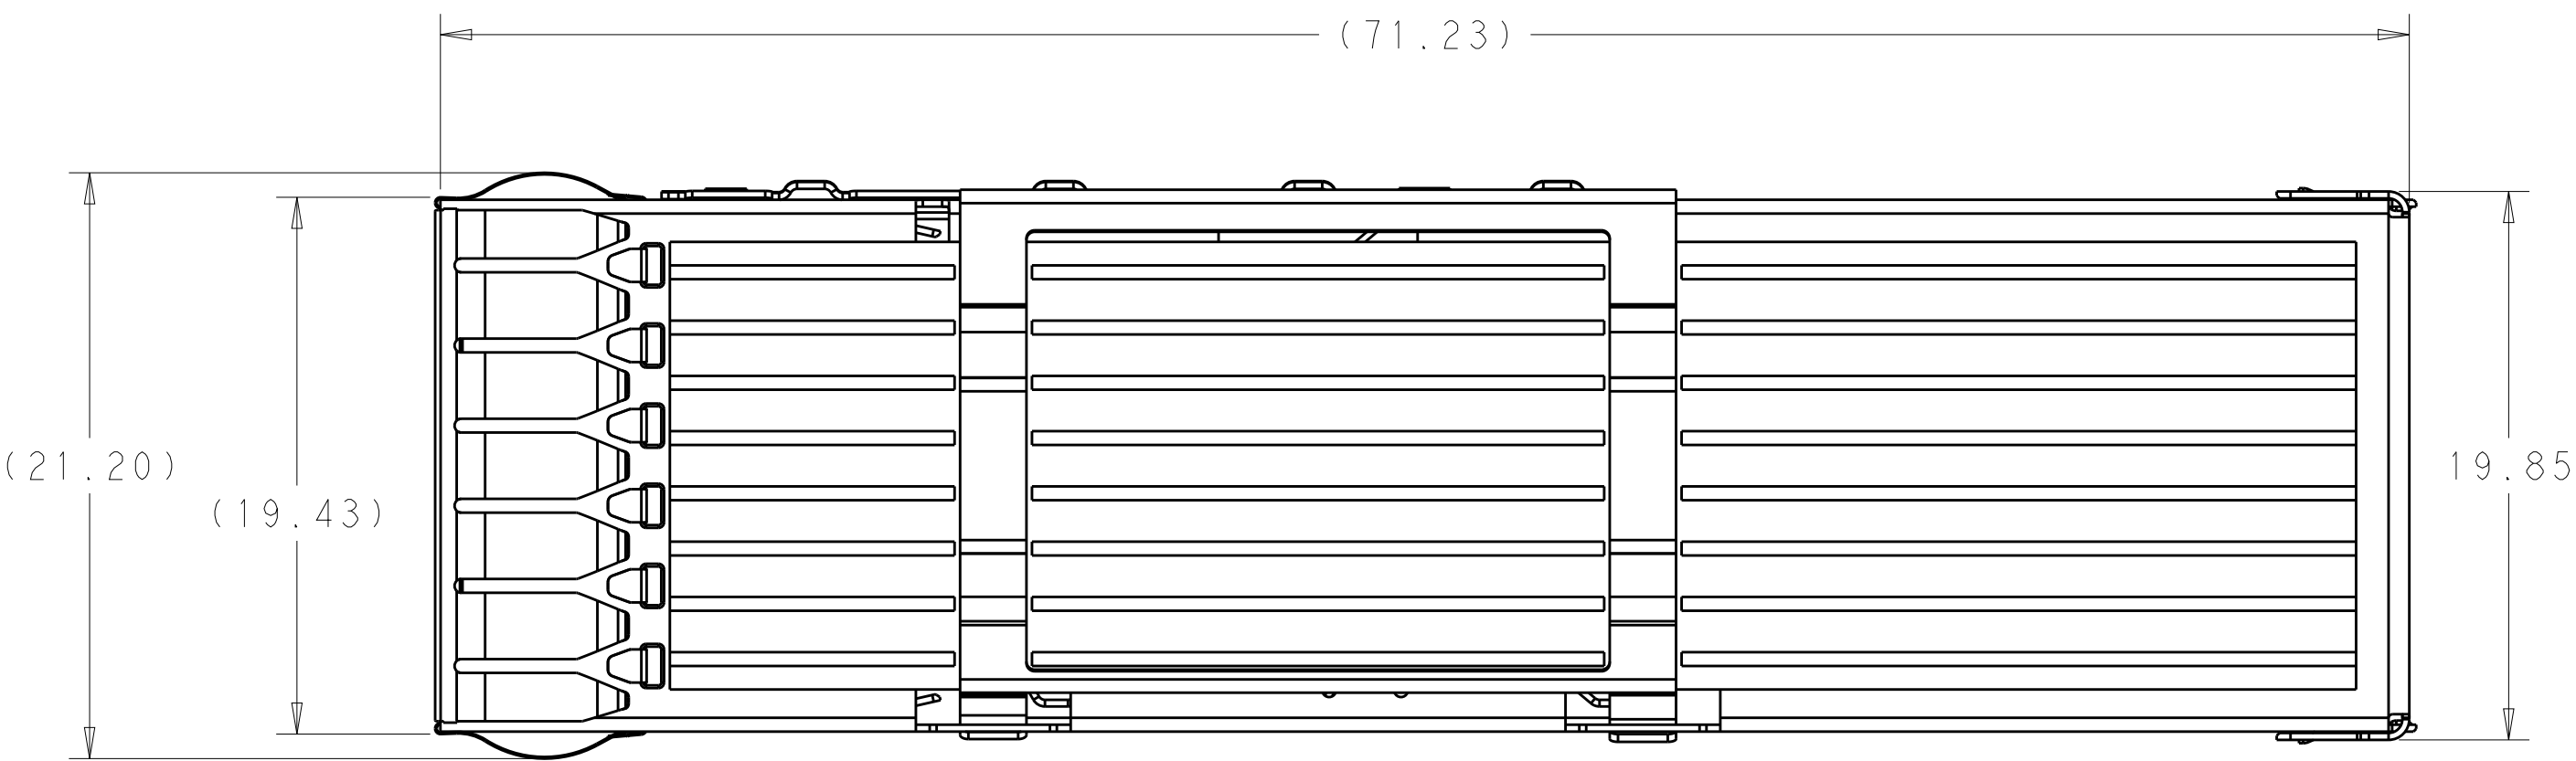

2342933-1 AS SHOWN
SCALE 4:1

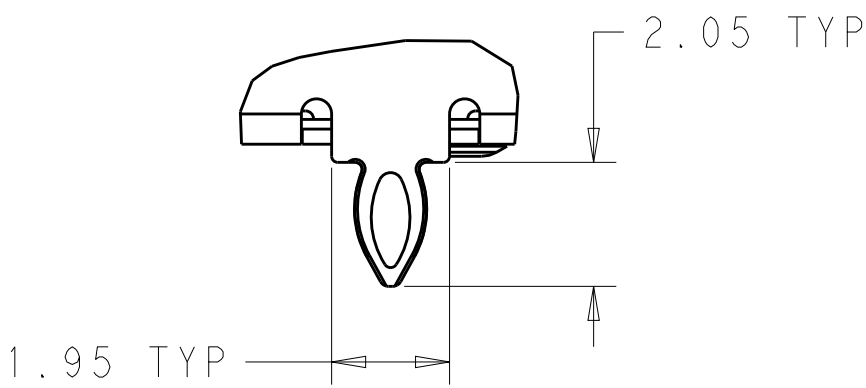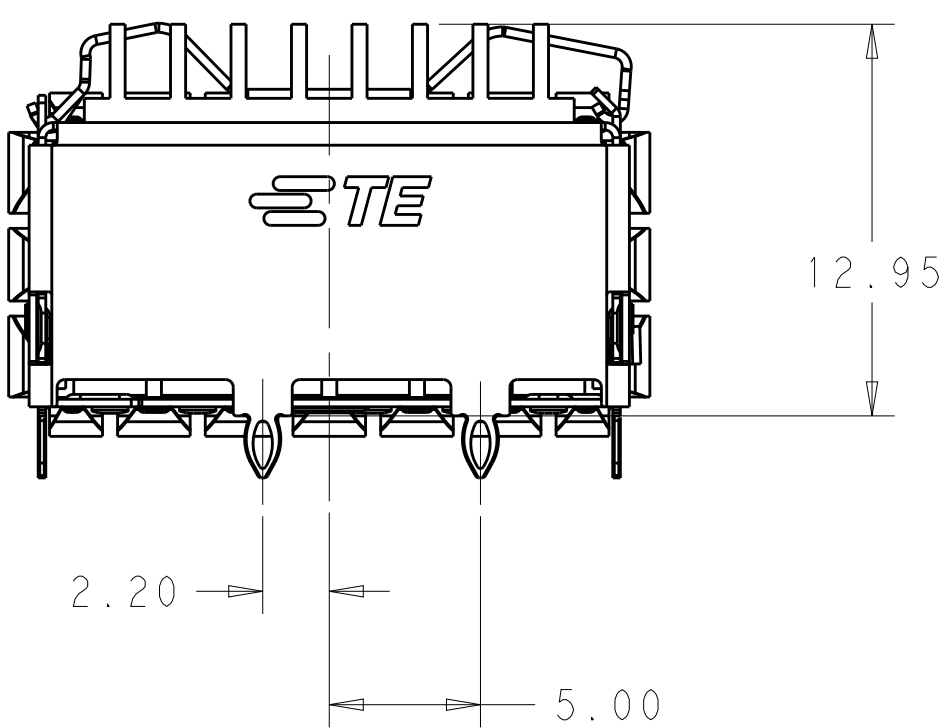


DETAIL A
SCALE 8:1

1. MATERIAL:
CAGE MATERIAL : 0.25 THICK STAINLESS STEEL.
SPRING MATERIAL: COPPER ALLOY
CLIP MATERIAL: STAINLESS STEEL
HEAT SINK: ALUMINUM
- 2 FINISH:
SPRING: NICKEL PLATING
HEAT SINK: BLACK ANODIZATION
- 3 DIMENSION APPLIES WITH MODULE INSTALLED IN THE CAGE TO TOP OF HEAT SINK.
- 4 REFERENCE APPLICATION SPEC 114-60025 FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMERS.
6. MINIMUM PC BOARD THICKNESS : SINGLES SIDED: 1.57 MIN
DOUBLE SIDED: 3.00 MIN
- 7 DATUM -A- IS TOP SURFACE OF THE HOST BOARD.
- 8 DATE CODE (YYWWD) MARKED APPROXIMATELY AS SHOWN
9. MATES WITH QSFP DD MSA COMPATIBLE TRANSCEIVER.


23.00	2	NETWORKING	2342933-3
16.00	2	SAN	2342933-2
13.70	2	PCI	2342933-1
DIM A	# REAR PINS	APPLICATION (HEAT SINK OPTION)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: ARTHUR JIN 29AUG2018 CHK: SEAN HAN 29AUG2018 APVD: SEAN HAN 29AUG2018	TE Connectivity	
DIMENSIONS: mm		PRODUCT SPEC 108-60122 APPLICATION SPEC 114-60025	NAME CAGE ASSEMBLY, QSFP-DD STANDARD WITH EMI SPRING FINGER	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.25 1 PLC ±0.25 2 PLC ±0.20 3 PLC ±0.10 4 PLC ± ANGLES ±°		WEIGHT -	SIZE A1	
MATERIAL -		CUSTOMER DRAWING		RESTRICTED TO -
		SCALE 2:1	SHEET 1 OF 5	REV A


LOC		DIST		REVISONS			
P	LTH	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	

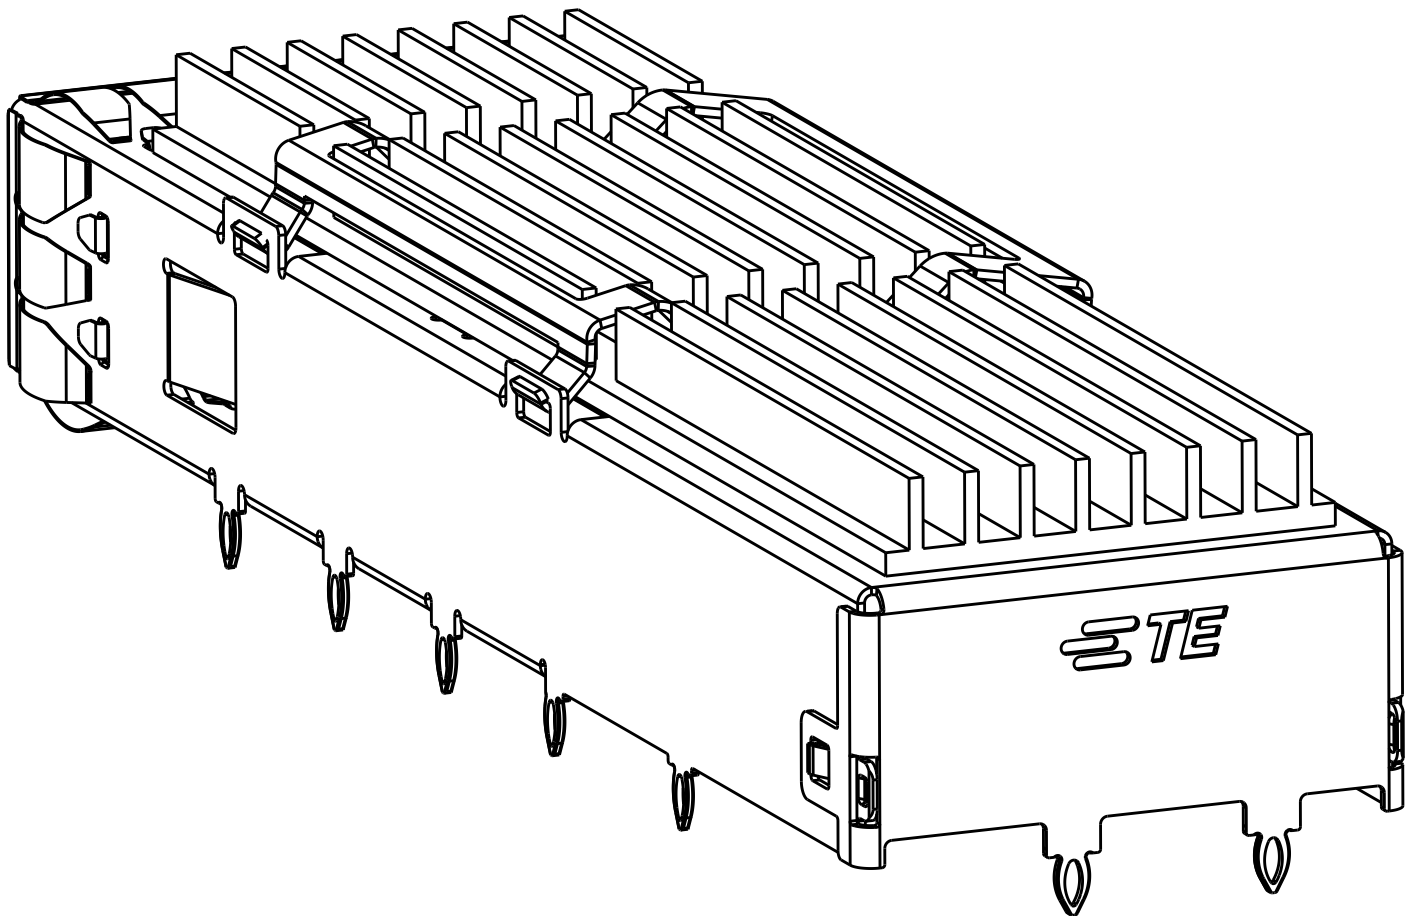

2342933-1 AS SHOWN
WITH PCI HEAT SINK
SCALE 4:1

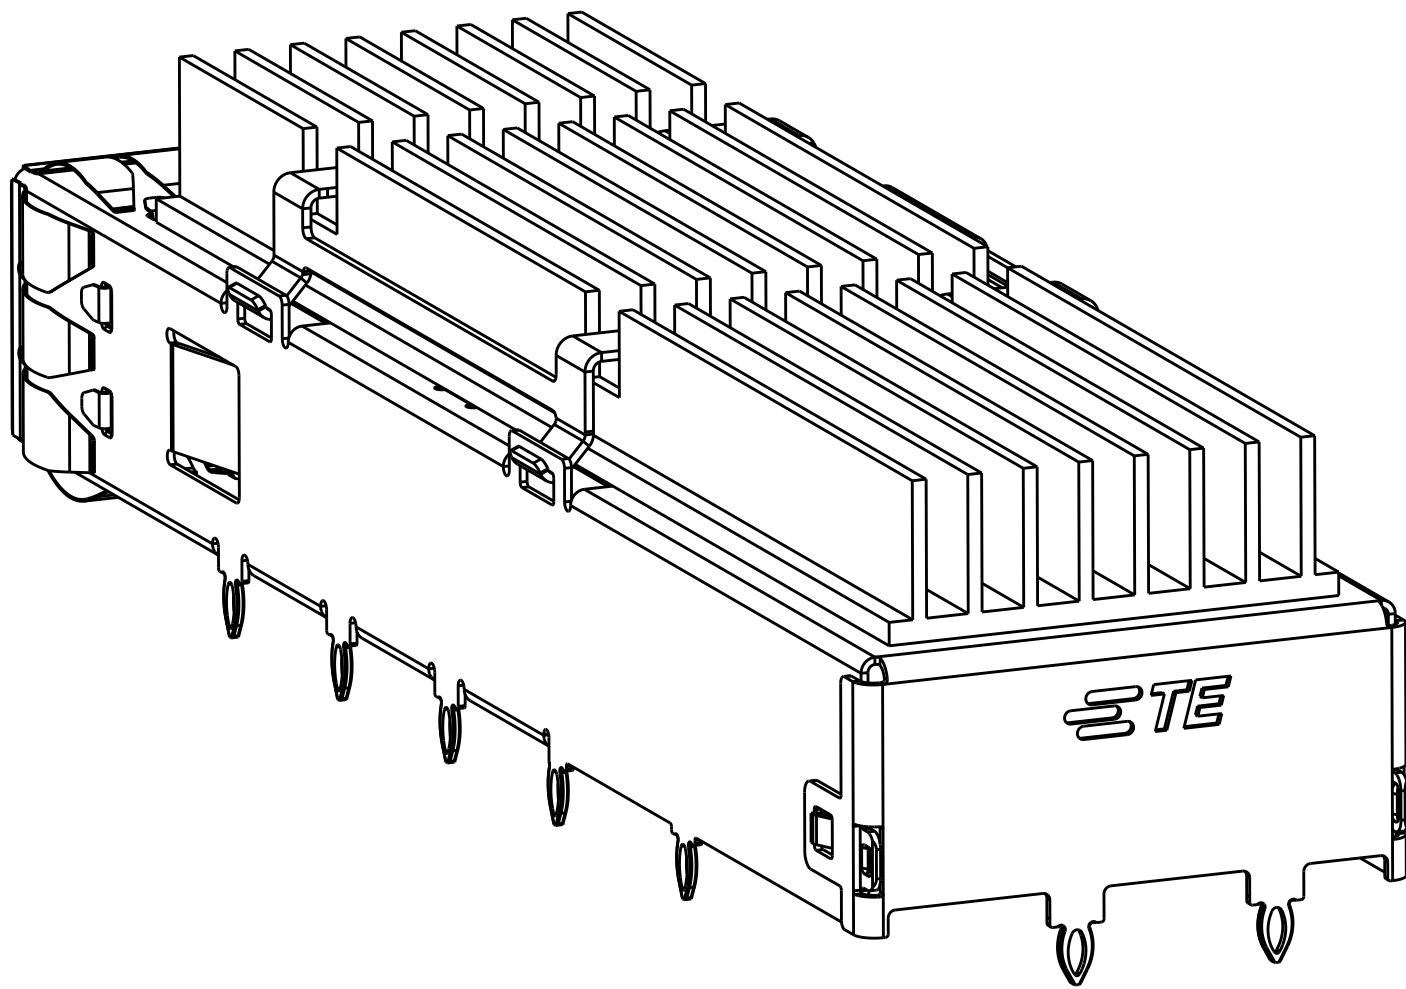





2342933-2 AS SHOWN
WITH SAN HEAT SINK
SCALE 4:1

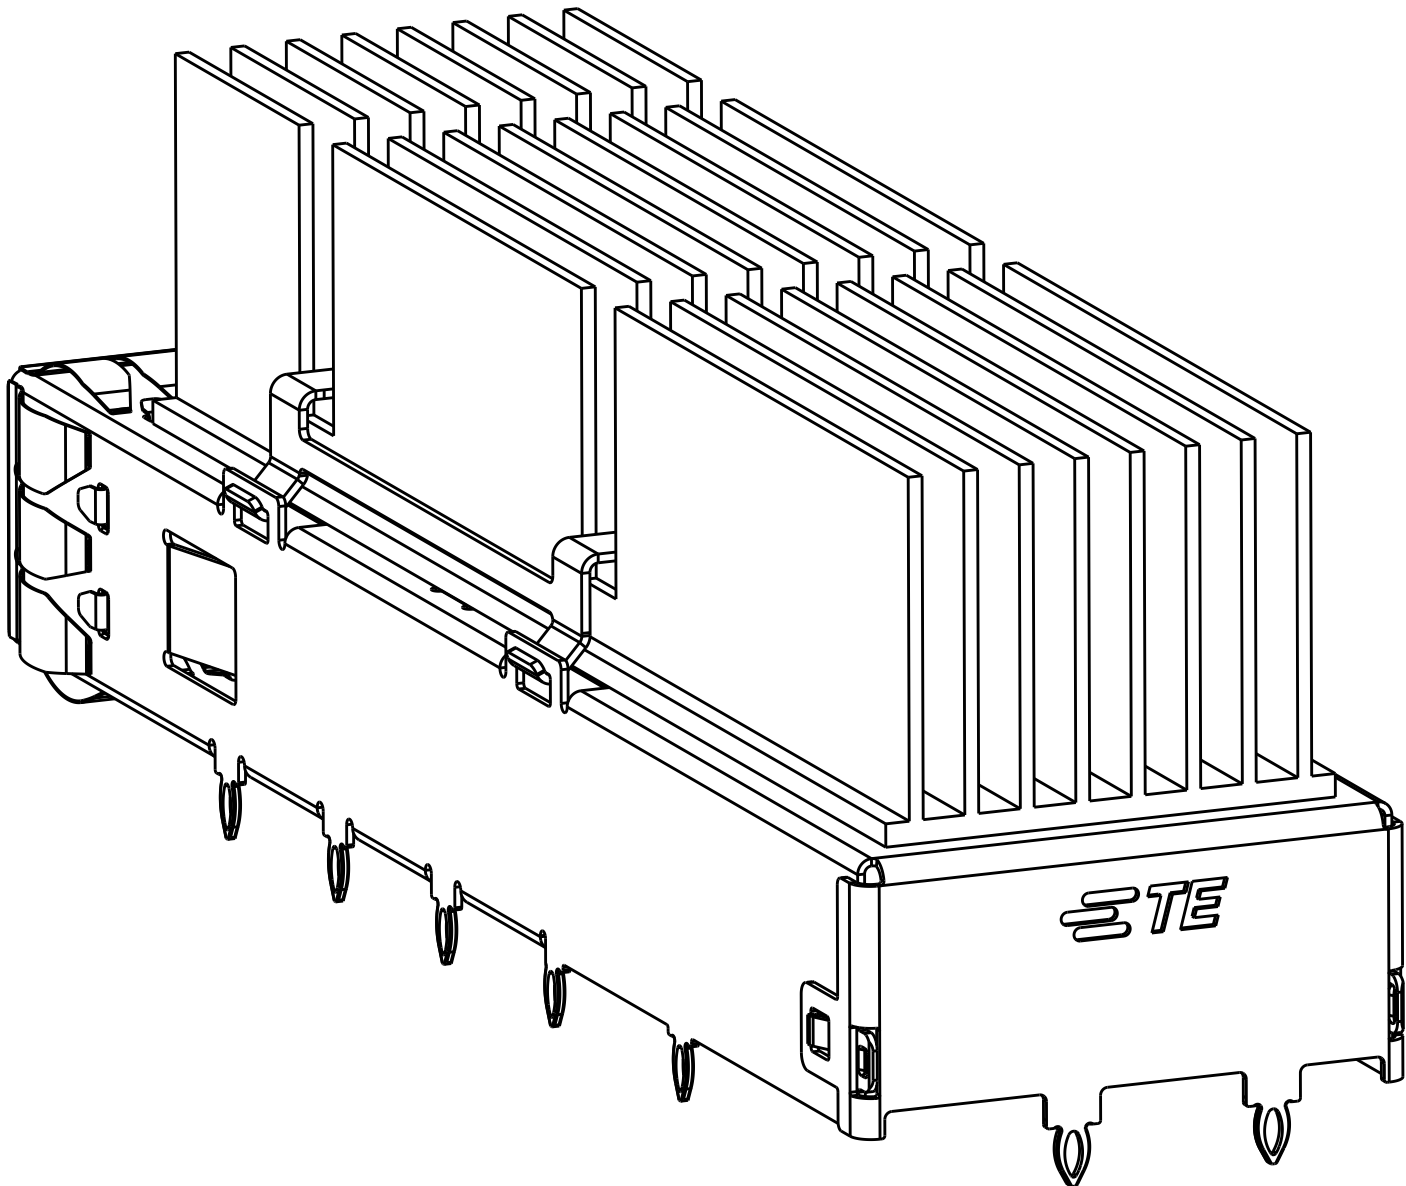


2342933-3 AS SHOWN
WITH NETWORKING HEAT SINK
SCALE 4:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: ARTHUR JIN 29AUG2018	TE Connectivity	
		CHK: SEAN HAN 29AUG2018		
DIMENSTONS:		APVD: SEAN HAN 29AUG2018	NAME: CAGE ASSEMBLY, QSFP-DD STANDARD WITH EMI SPRING FINGER	
mm		PRODUCT SPEC		
		108-60122	SIZE: A1	
		APPLICATION SPEC		
		114-60025	CAGE CODE: -	
		FINISH		
MATERIAL: -		WEIGHT: -	DRAWING NO: 2342933	
		CUSTOMER DRAWING		RESTRICTED TO: -
		SCALE: 2:1	SHEET: 2 OF 5	REV: A

LOC		DIST		REVISIONS				
-	-	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		-		SEE SHEET 1	-	-	-	

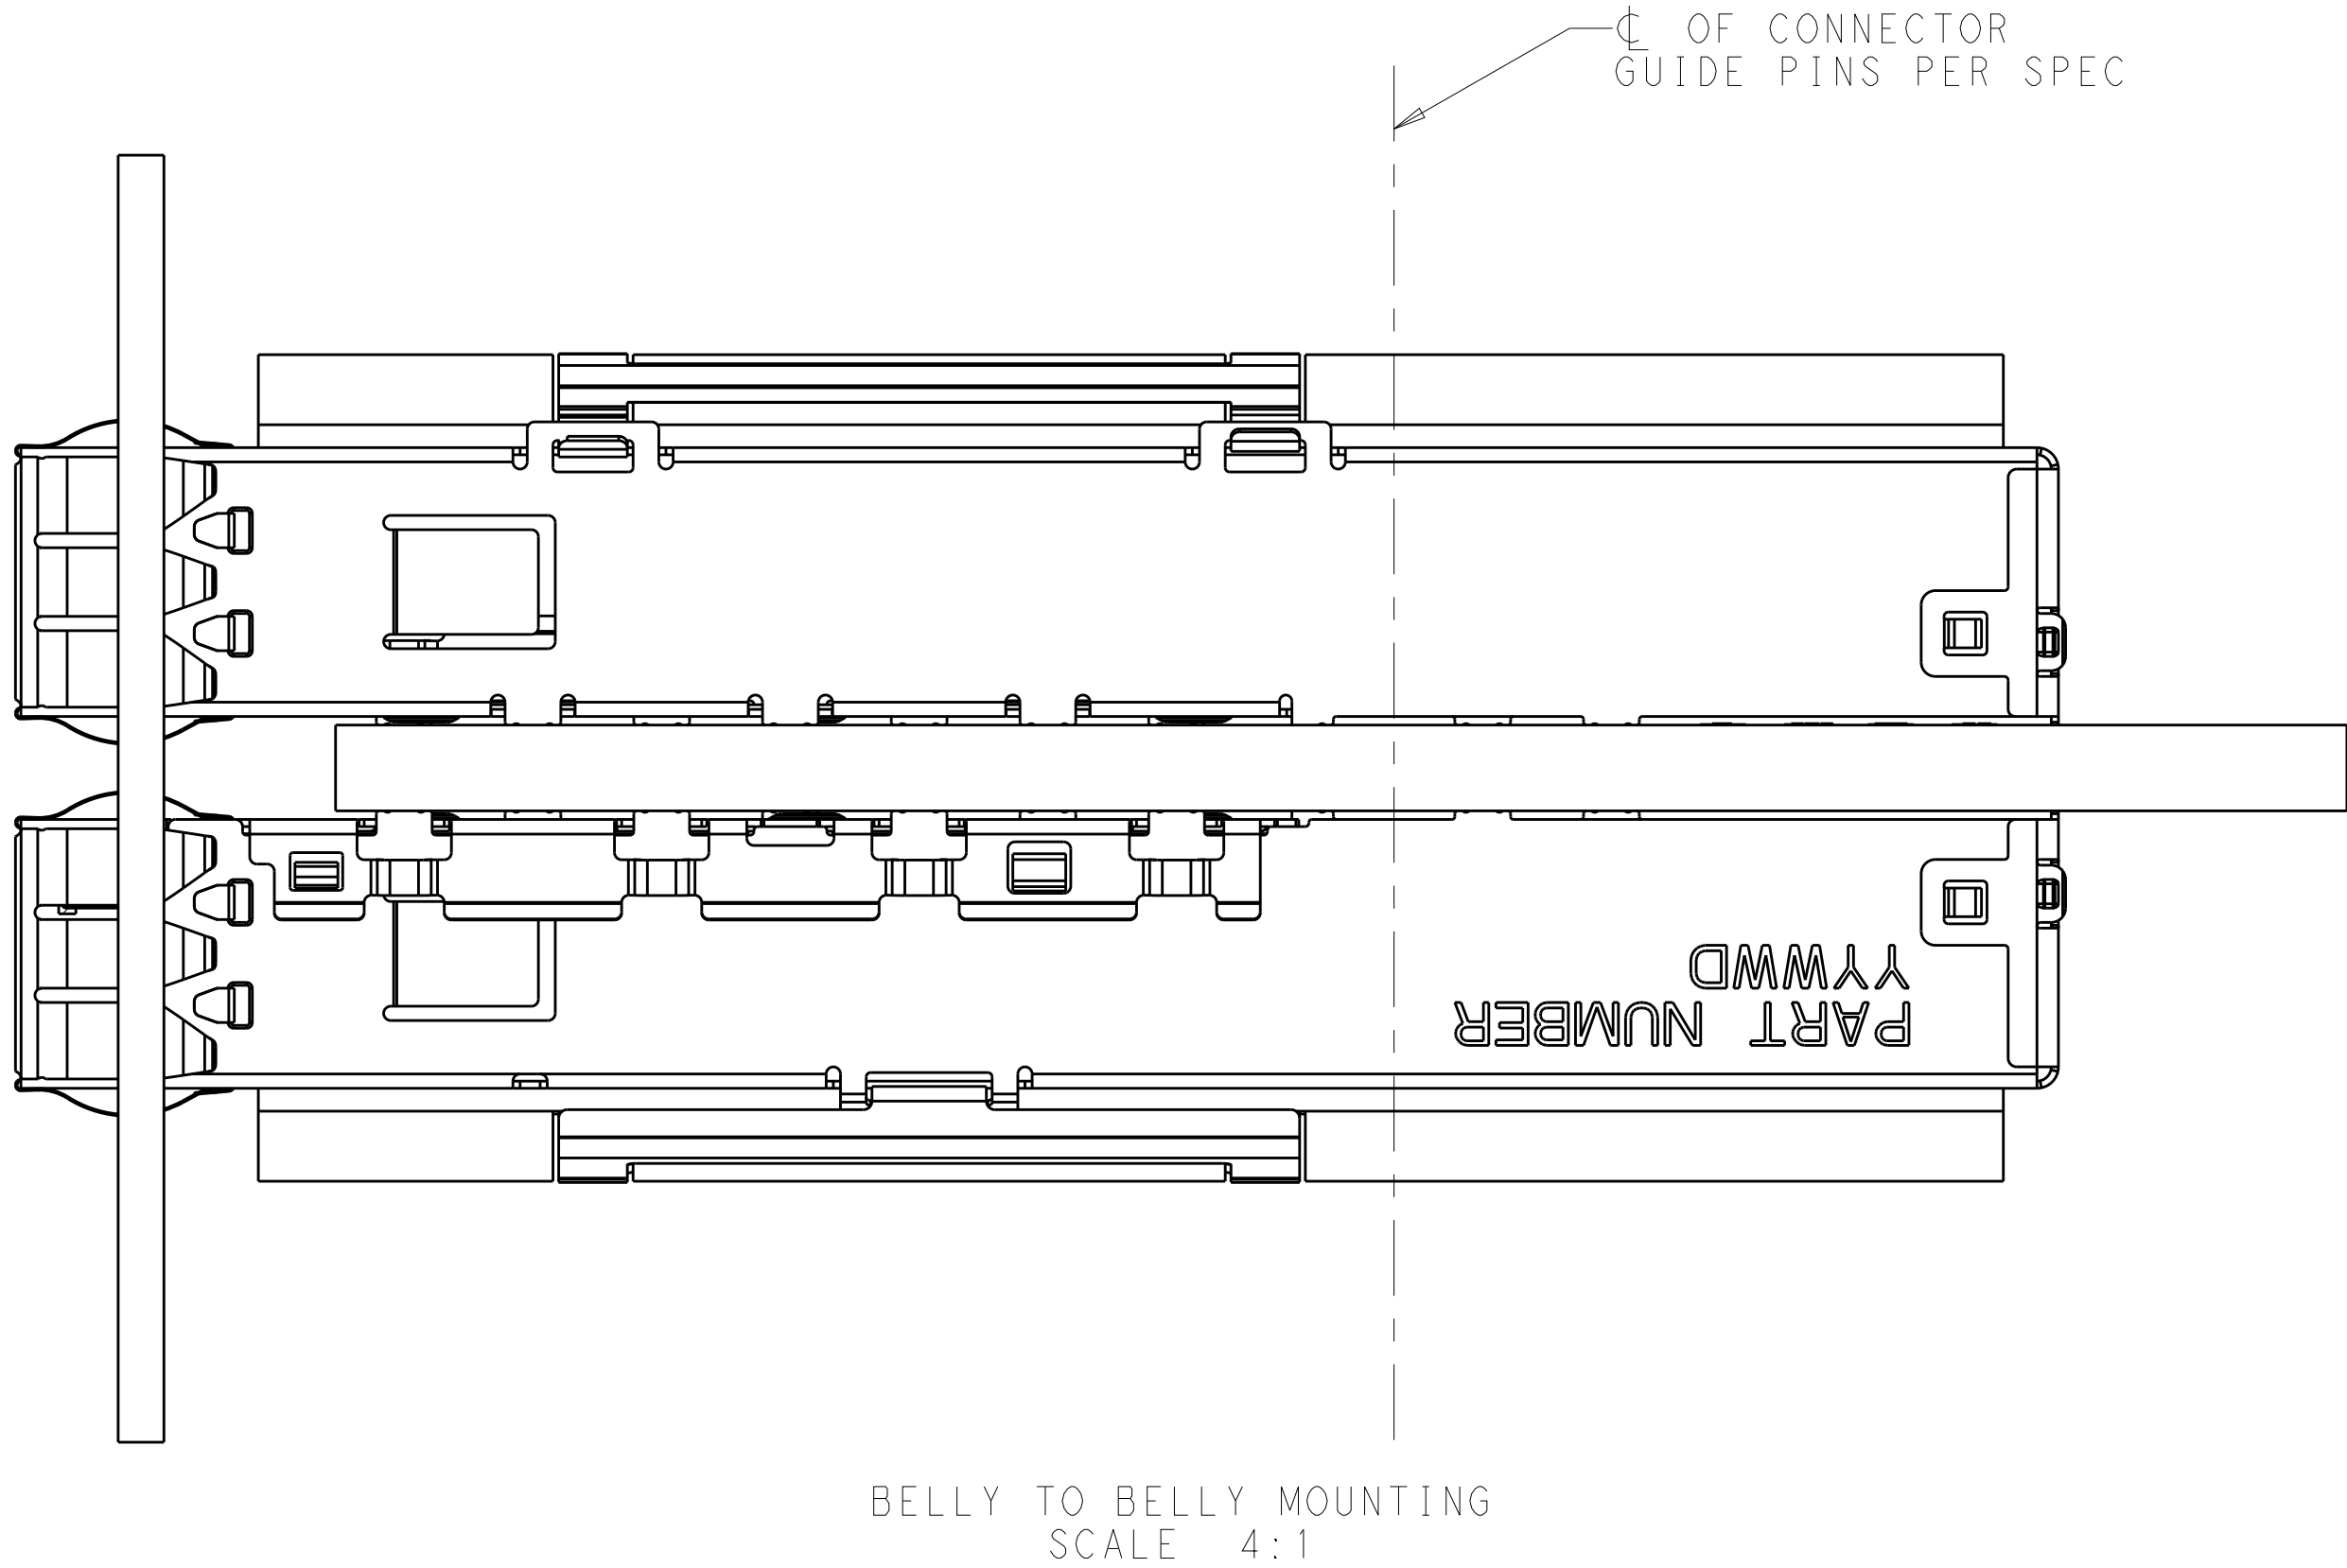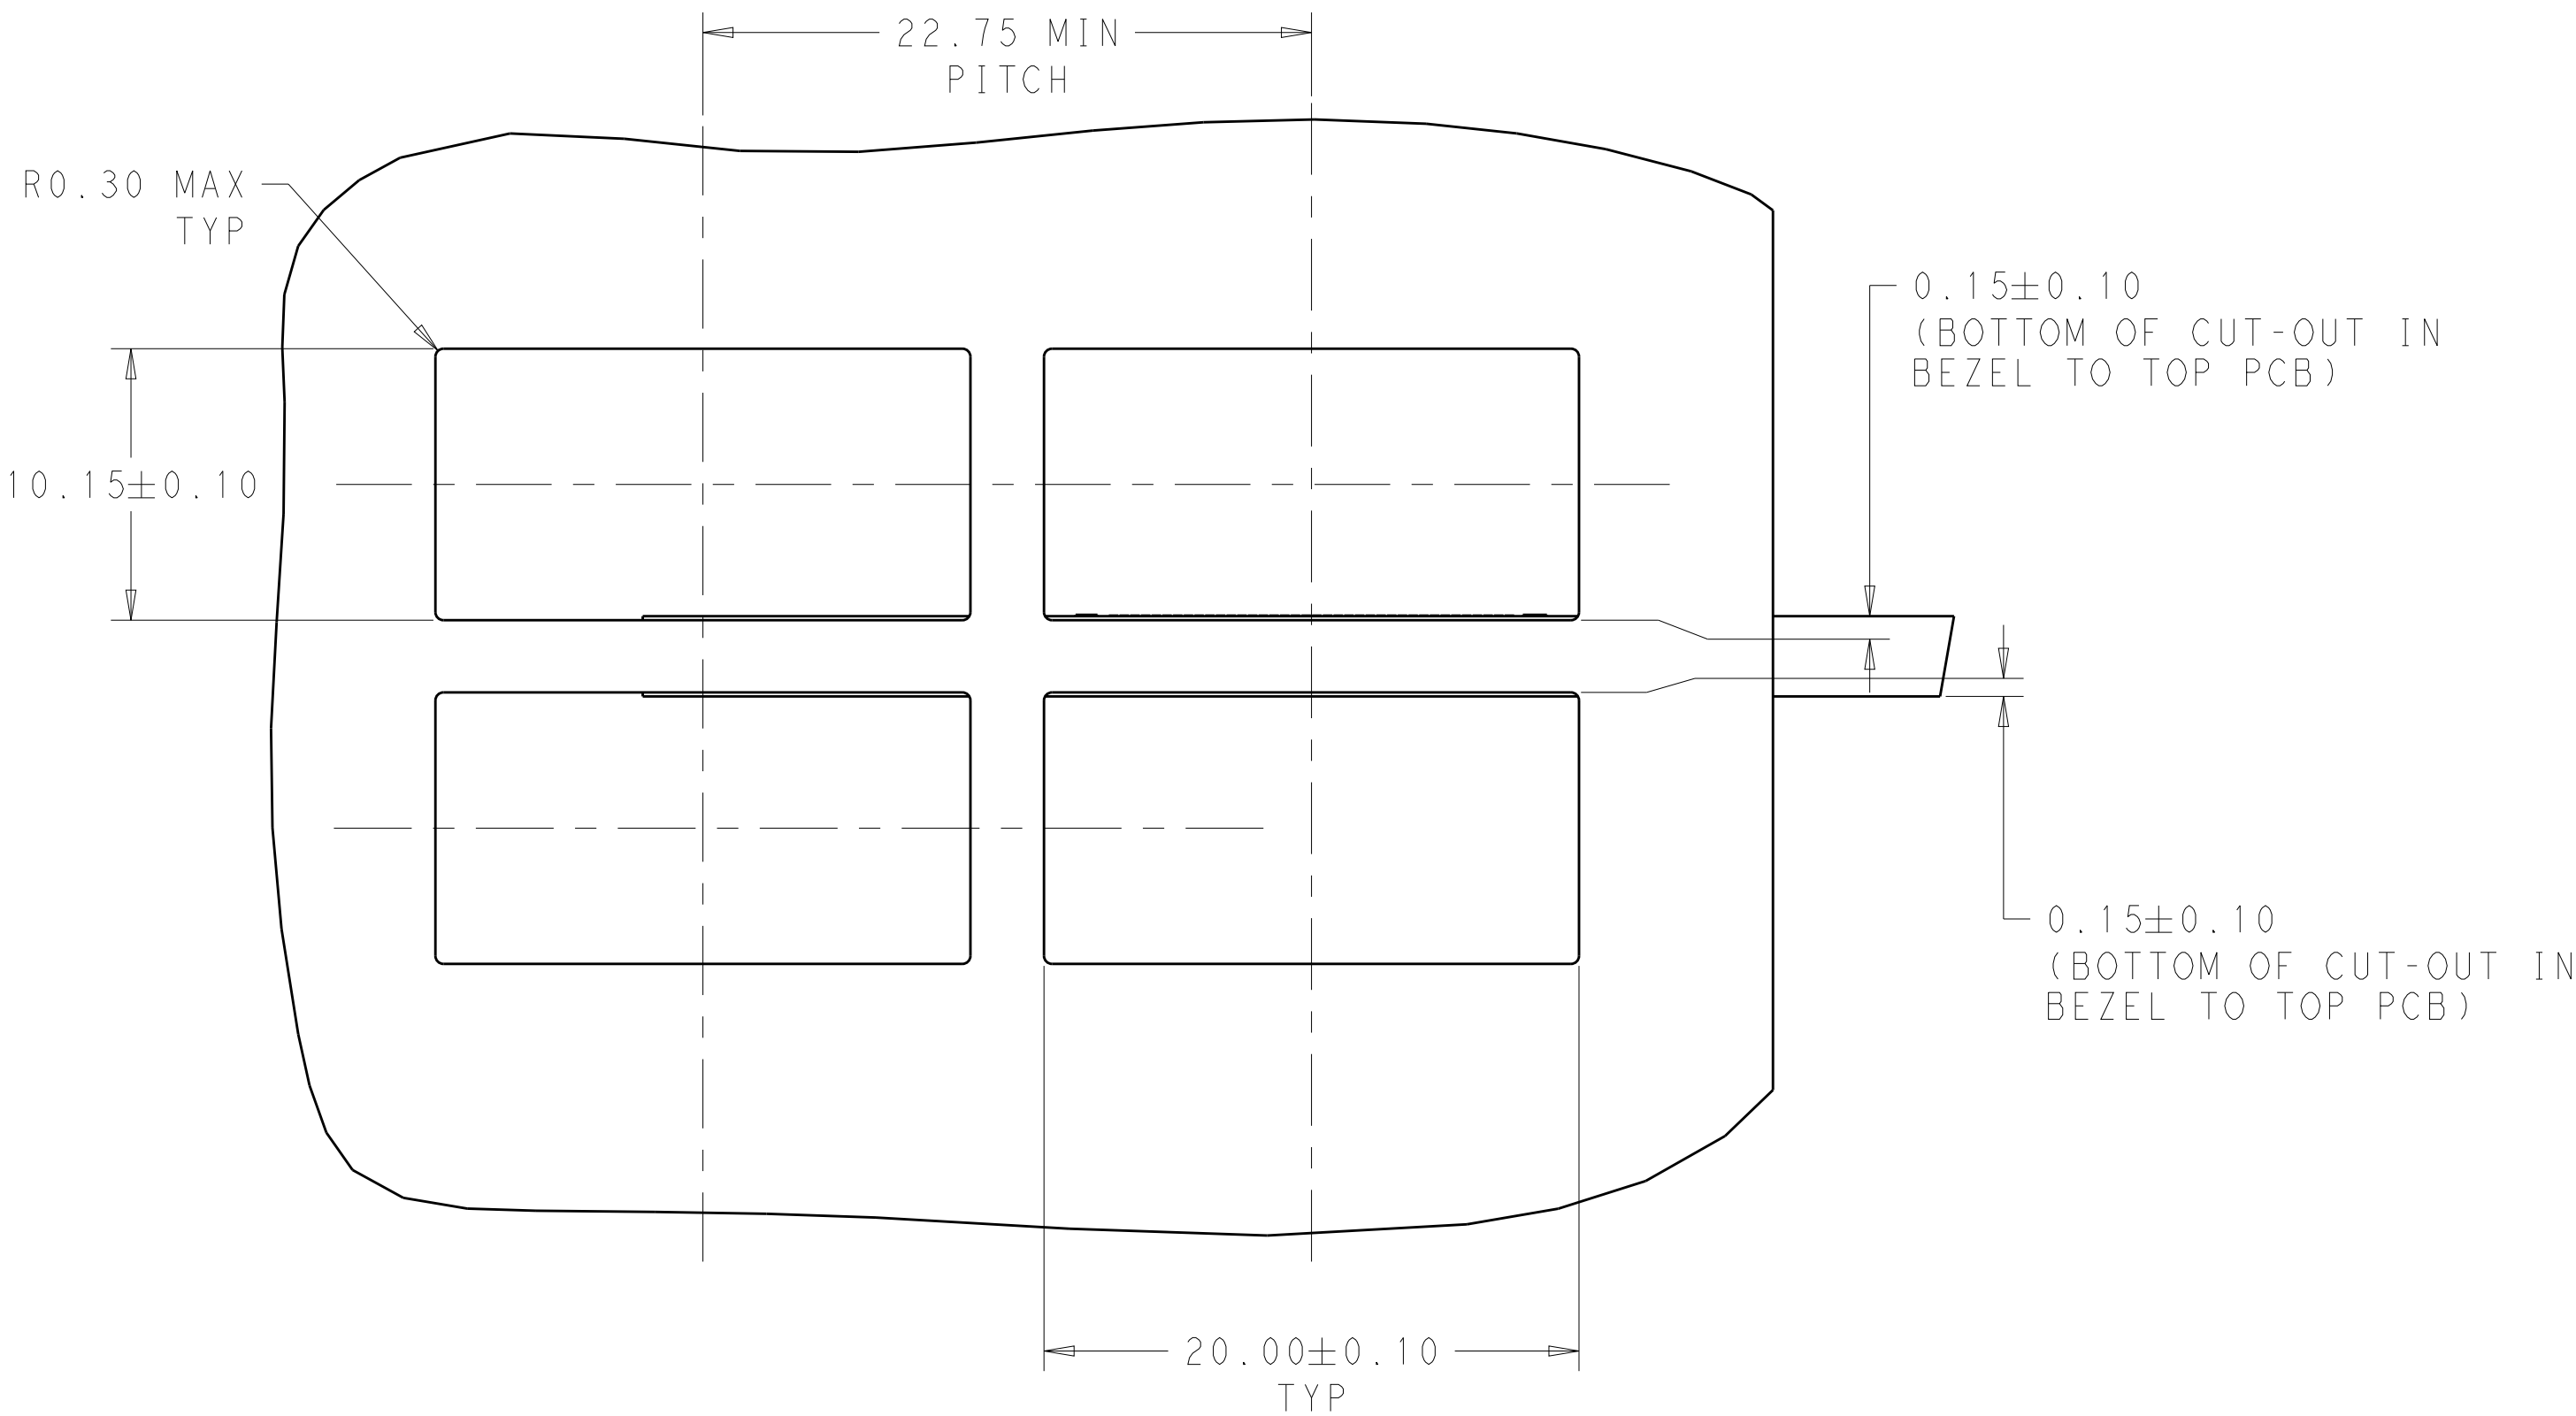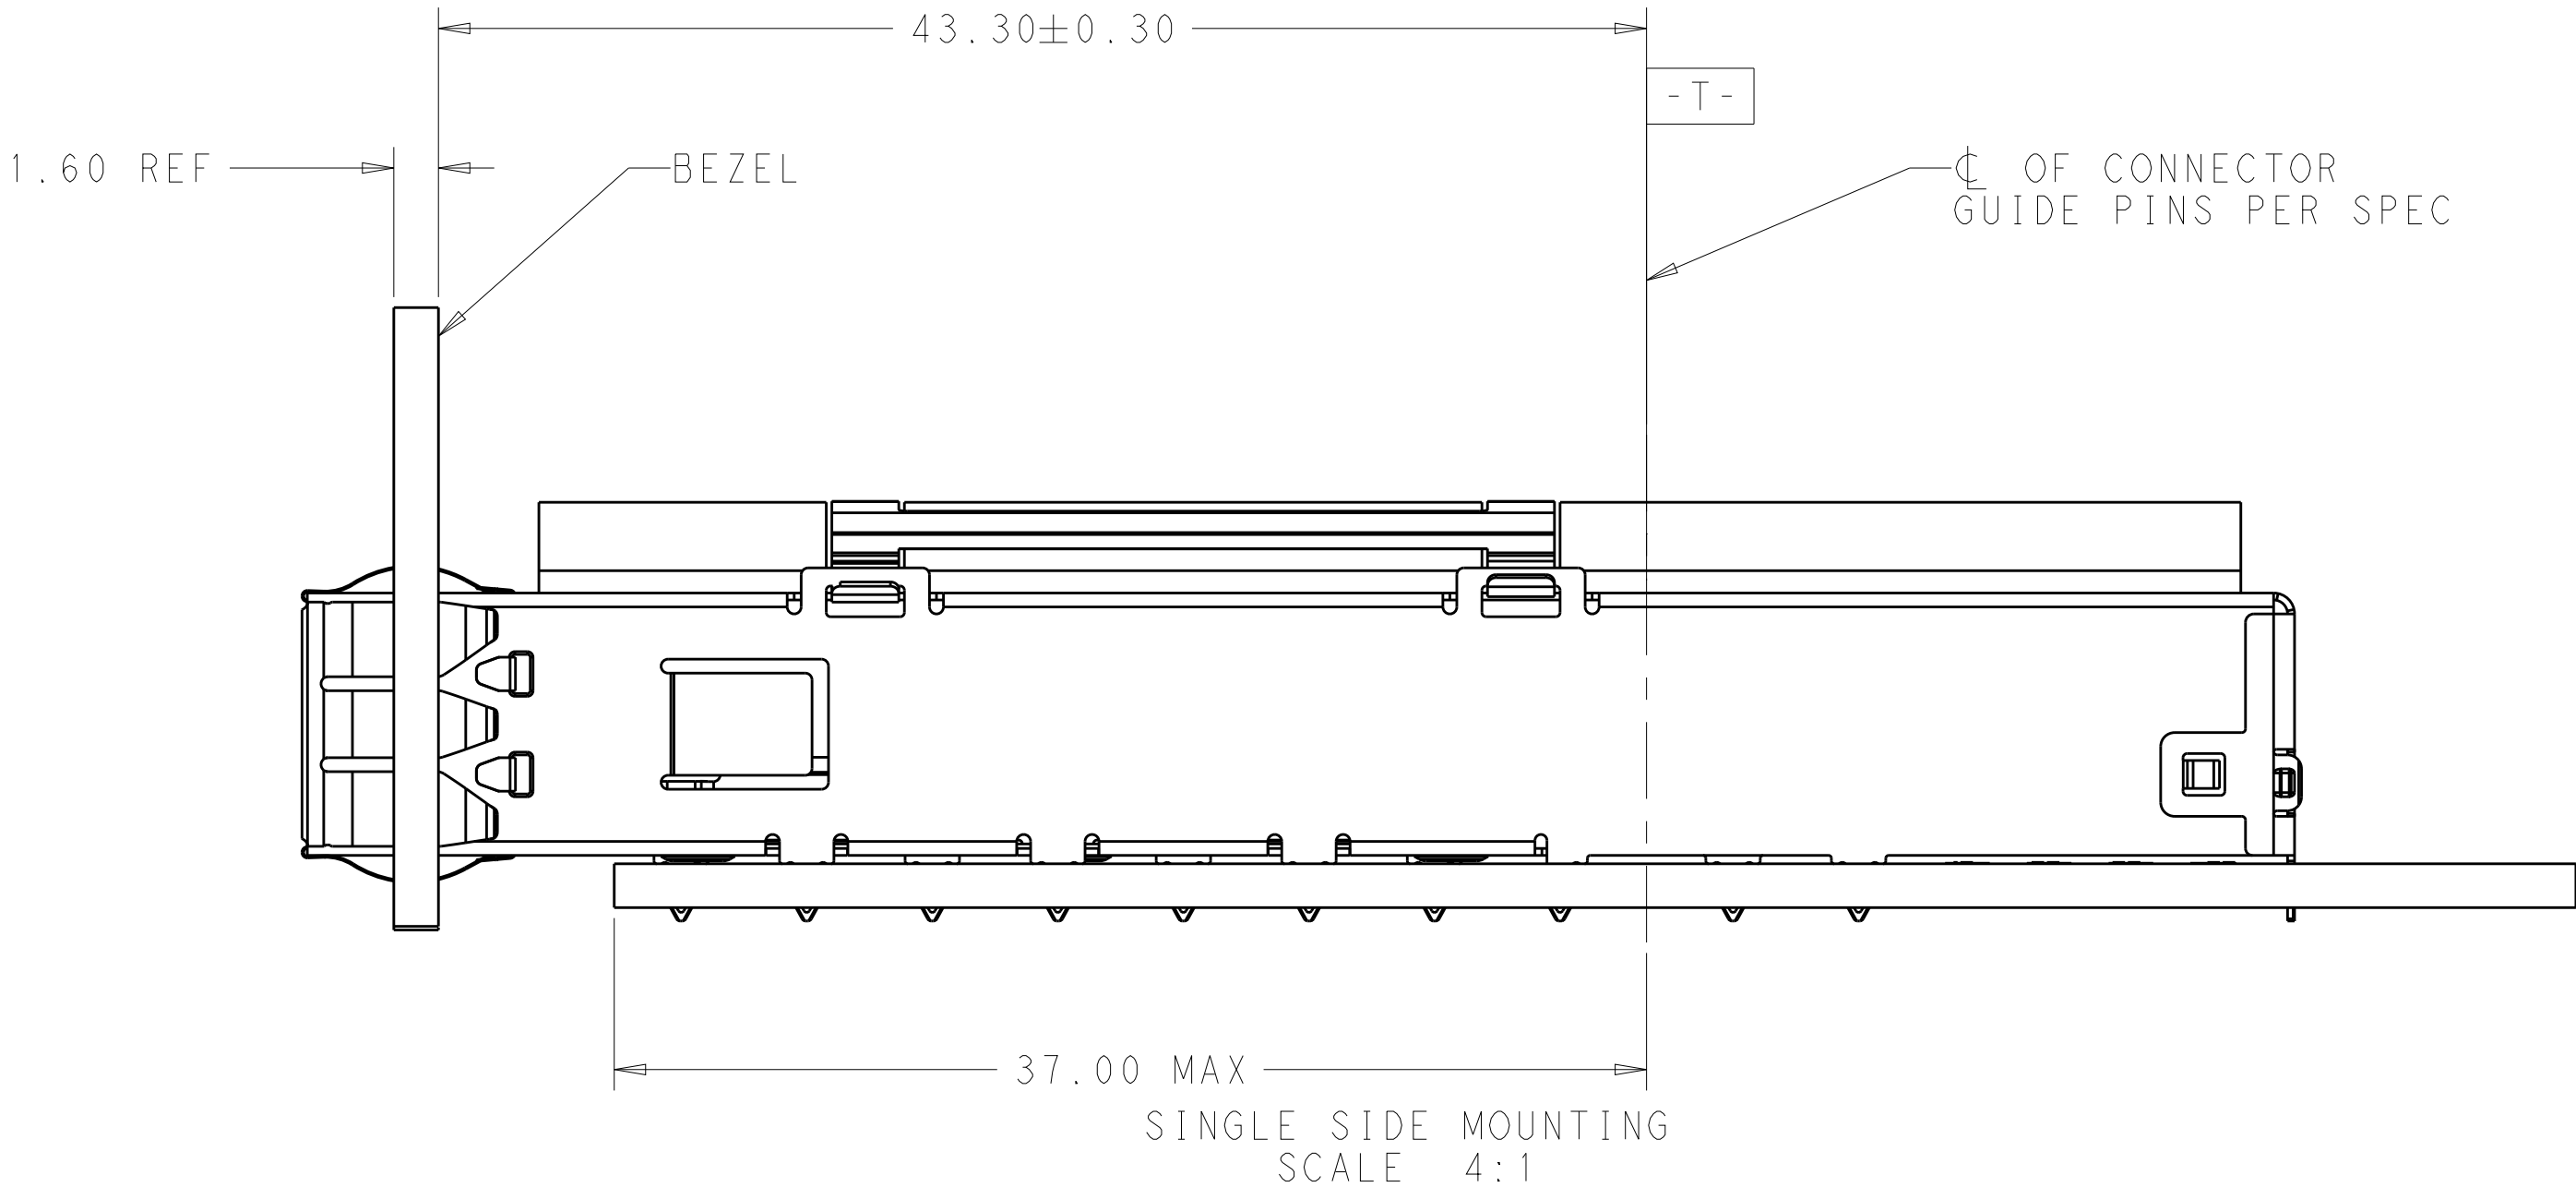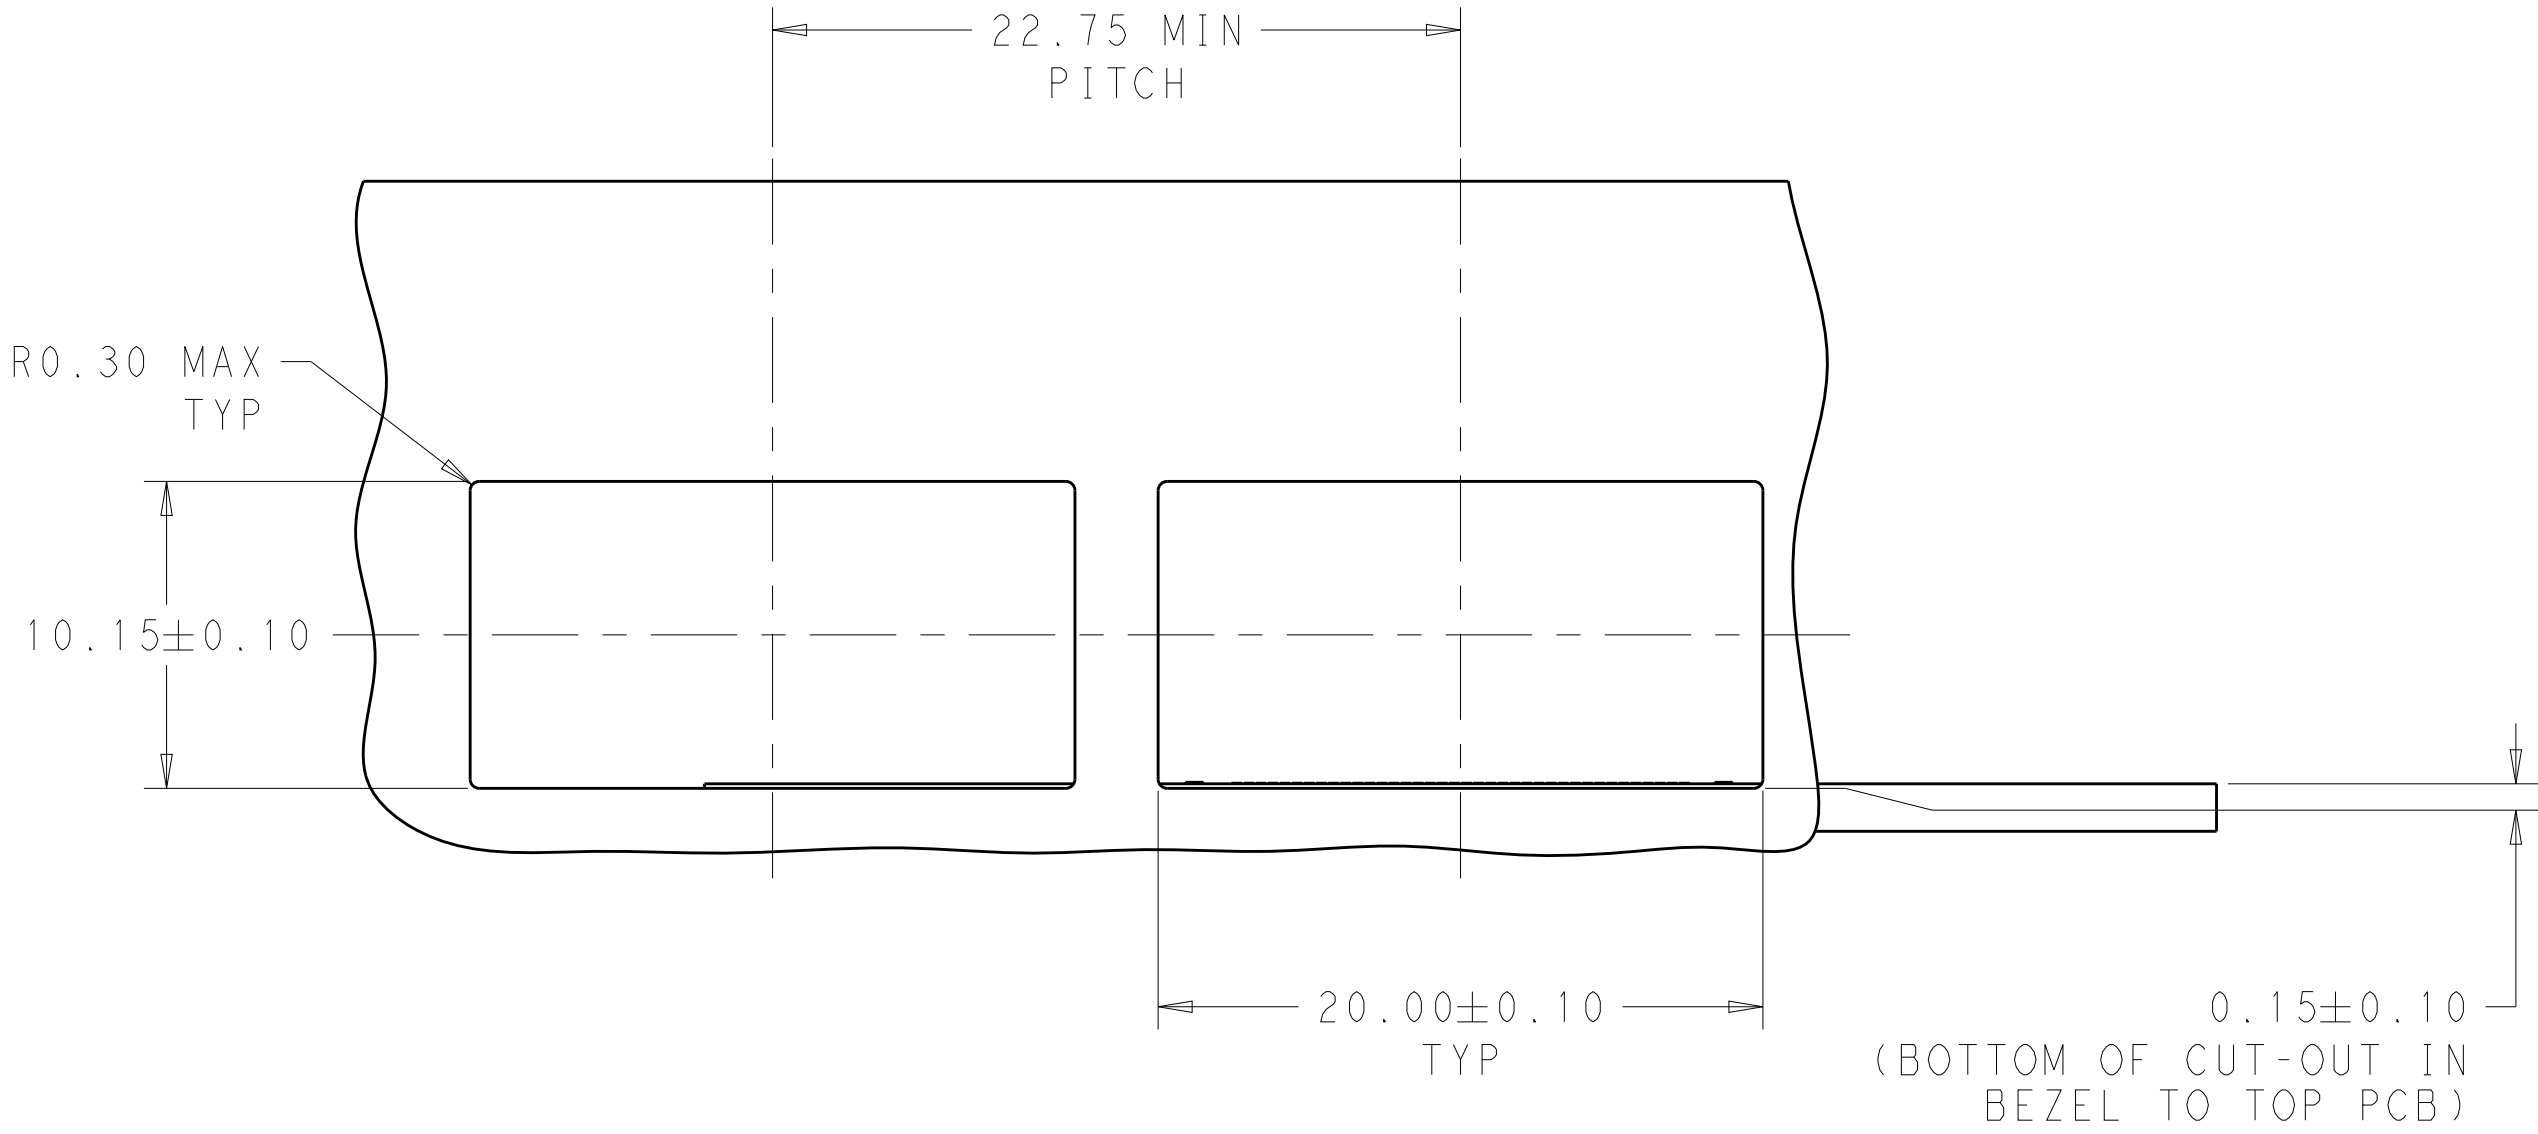



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	ARTHUR JIN	29AUG2018	 TE Connectivity	
		CHK	SEAN HAN	29AUG2018		
		APVD	SEAN HAN	29AUG2018	NAME	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CAGE ASSEMBLY, QSFP-DD STANDARD WITH EMI SPRING FINGER		
mm		1 P LDC ±0.25 1 P LDC ±0.25 2 P LDC ±0.20 3 P LDC ±0.10 4 P LDC ±0.10 4 P LDC ANGLES ±°		PRODUCT SPEC 108-60122 APPLICATION SPEC 114-60025		
				SIZE CAGE CODE DRAWING NO		
MATERIAL		FINISH		RESTRICTED TO		
-		-		-		
		WEIGHT		A1 - C=2342933		
		CUSTOMER DRAWING		SCALE 2:1 SHEET 3 OF 5 REV A		

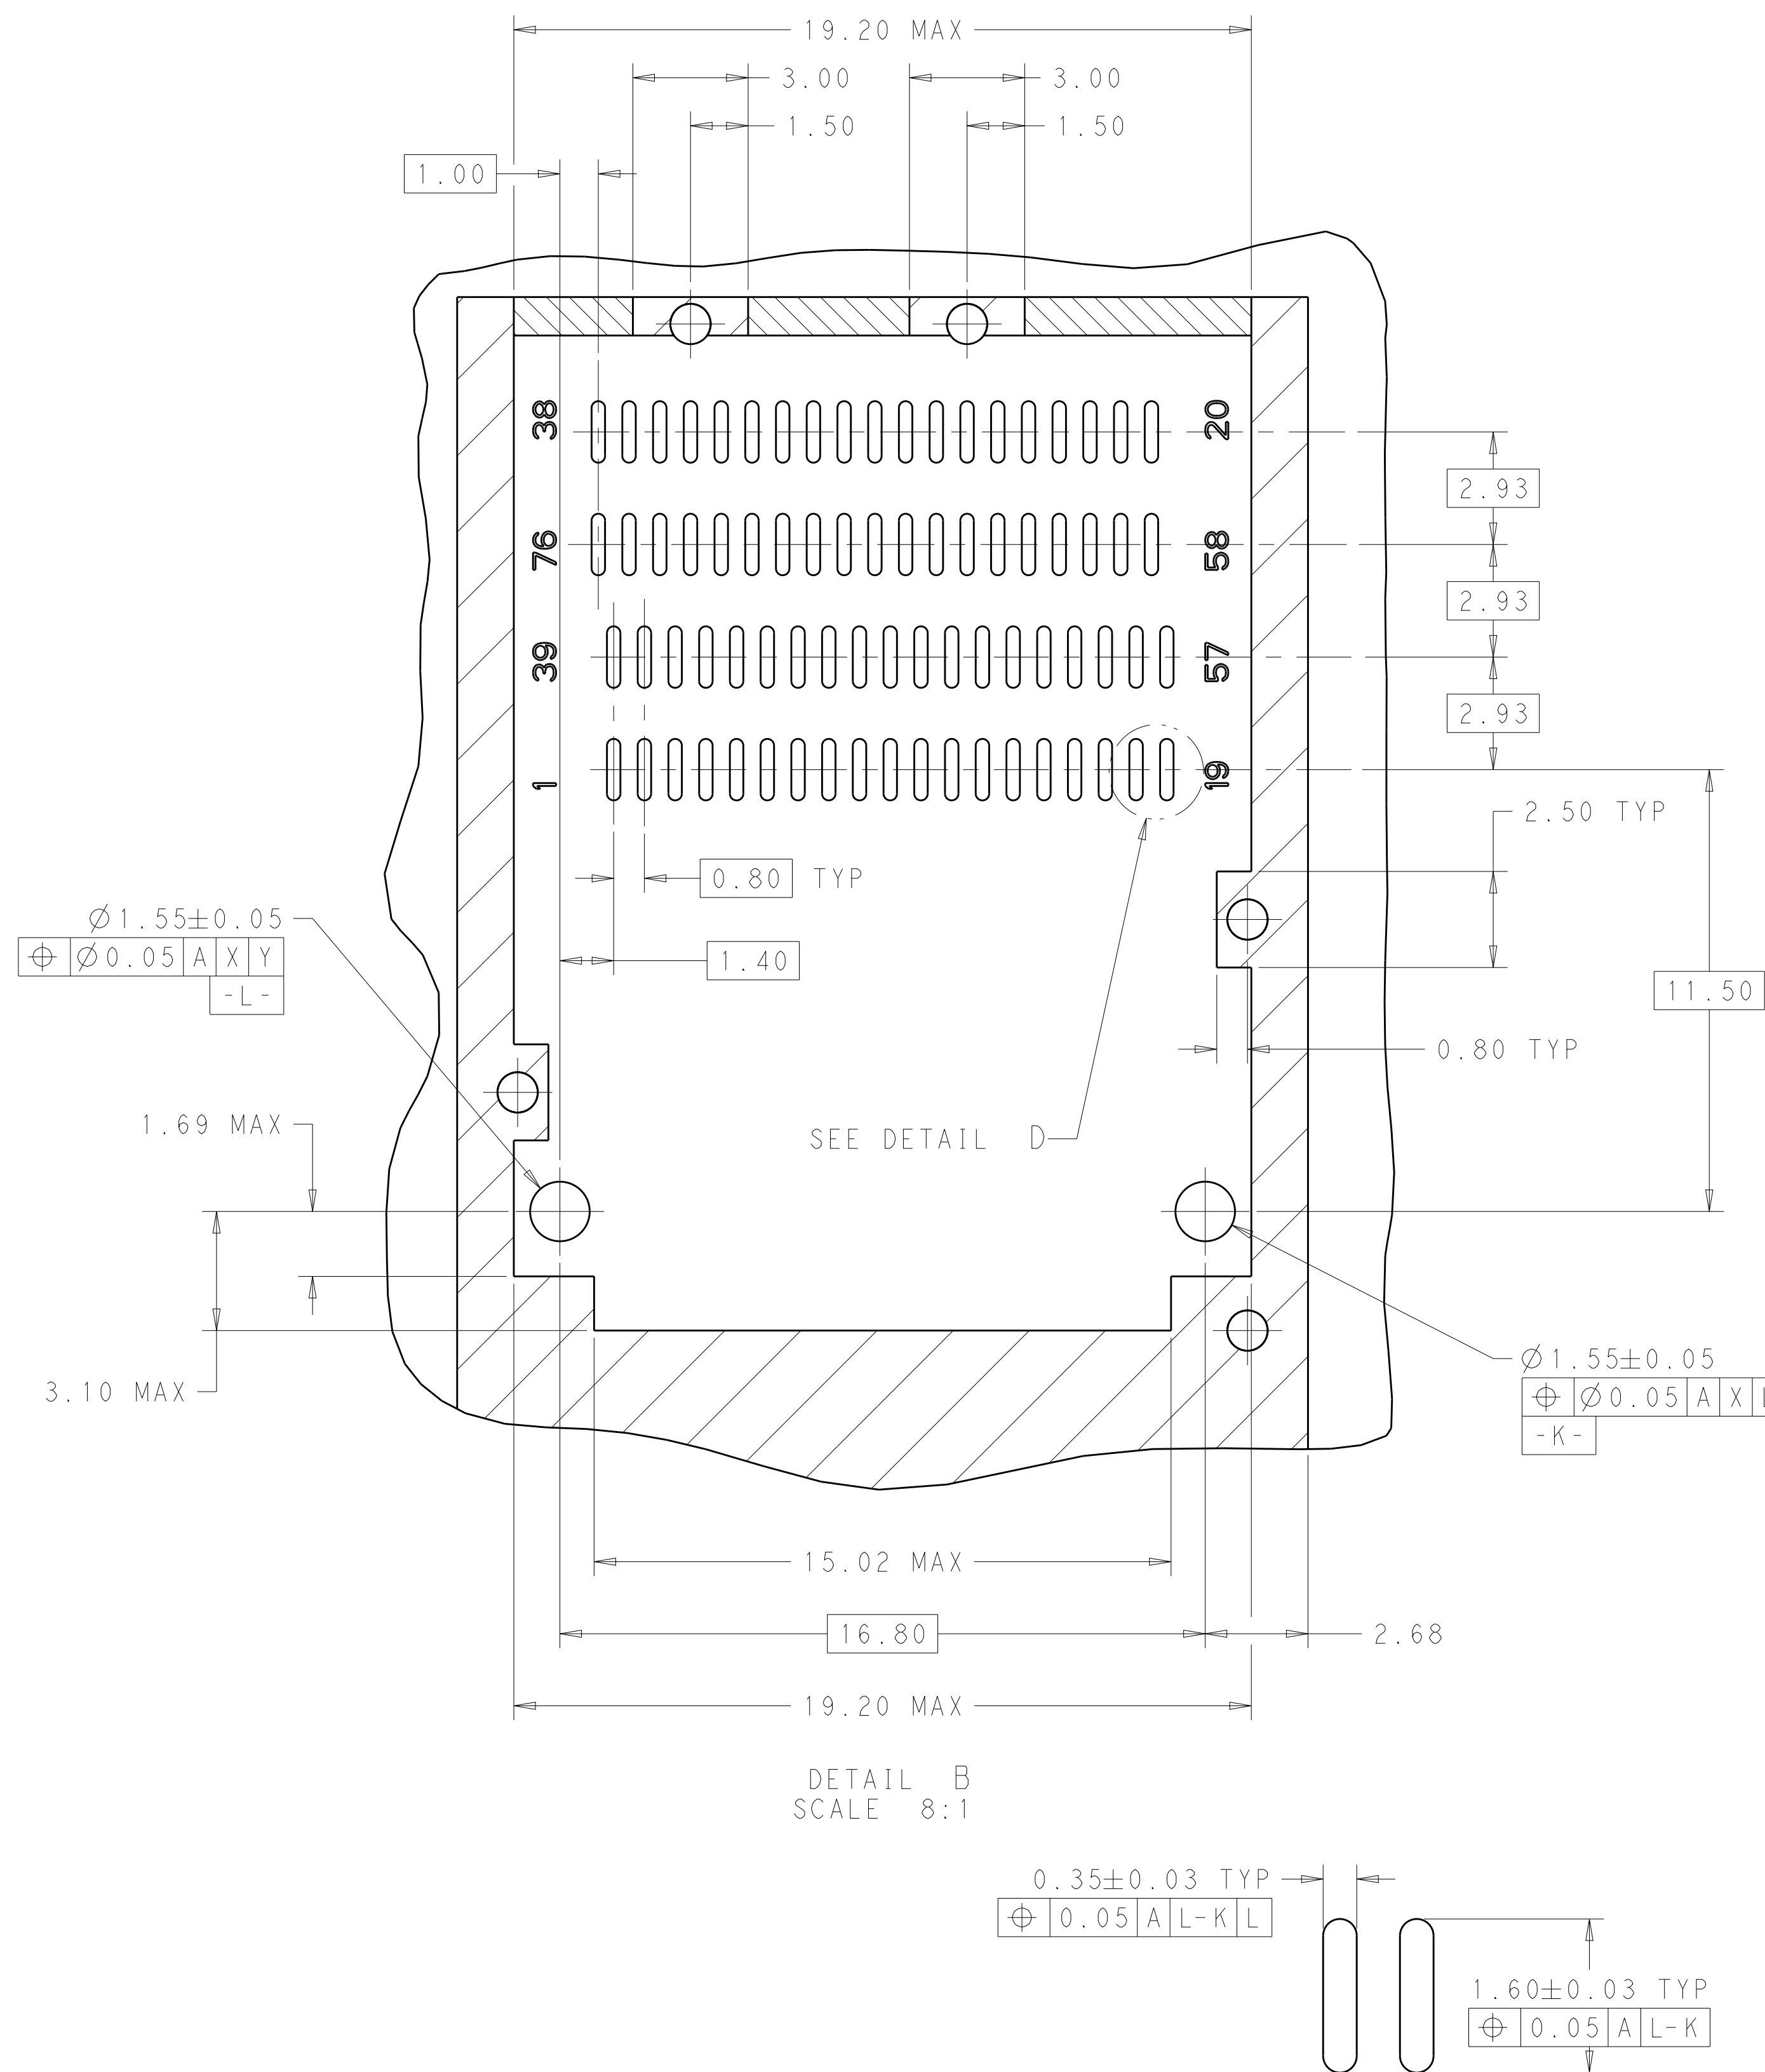

DETAIL D
SCALE 20:1

4805 (3/11)

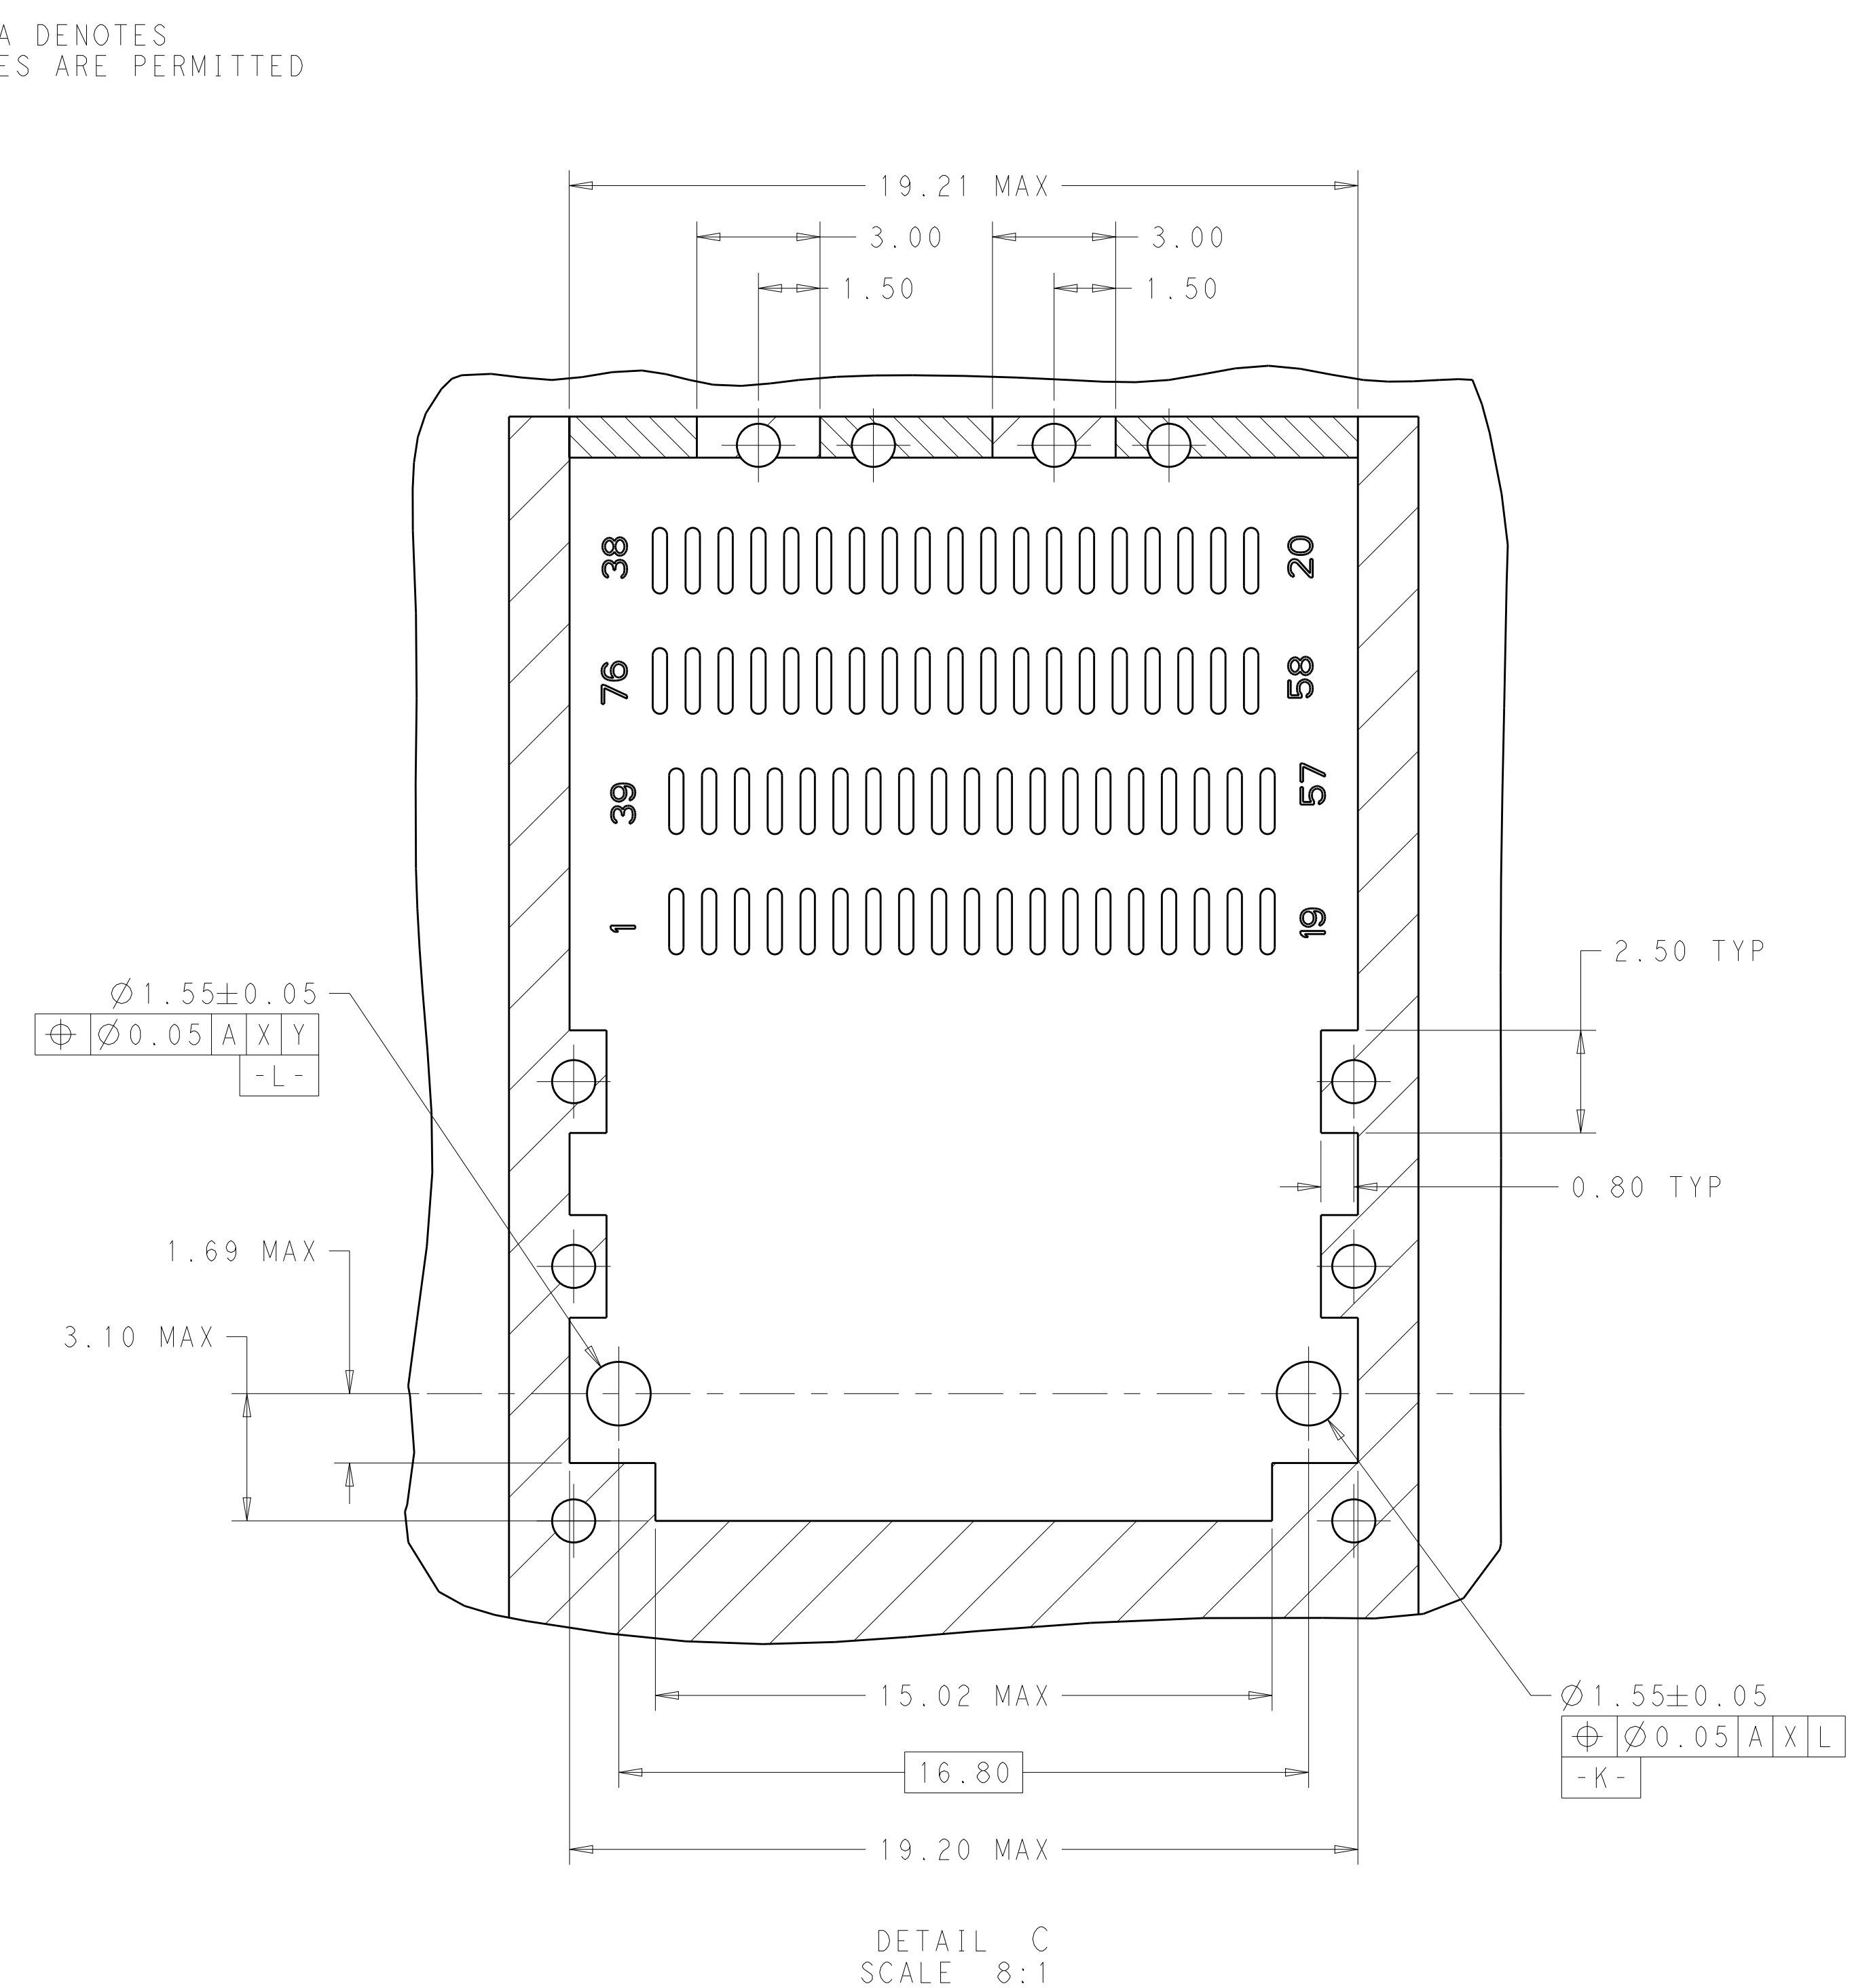

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN ARTHUR JIN 29AUG2018		 TE Connectivity	
		CHK SEAN HAN 29AUG2018			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME CAGE ASSEMBLY, OSFP-DD STANDARD WITH EMI SPRING FINGER	
mm		0 PLC ± 0.25 1 PLC ± 0.25 2 PLC ± 0.20 3 PLC ± 0.10 4 PLC $\pm .$			
		ANGLES FINISH $\pm .$			
MATERIAL		WEIGHT			
-		-		SIZE A 1	
		114-60025		CAGE CODE -	
				DRAWING NO C=2342933	
		CUSTOMER DRAWING		RESTRICTED TO -	
				SCALE 2:1 SHEET 5 OF 5 REV A	