

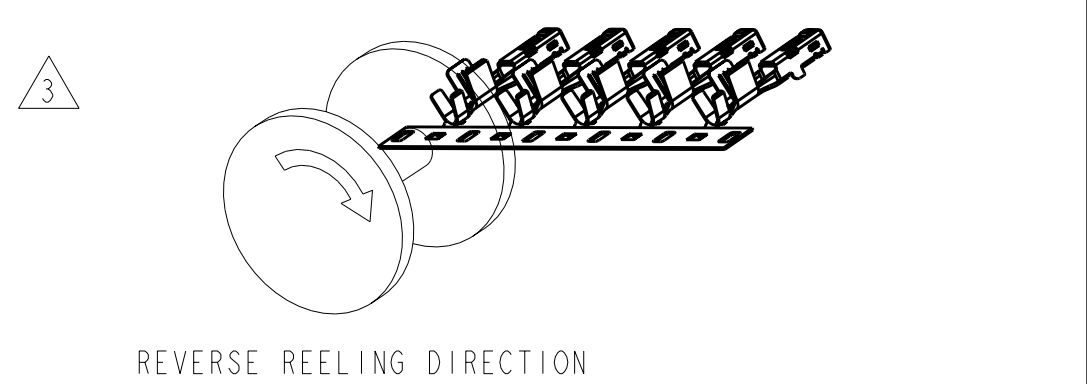


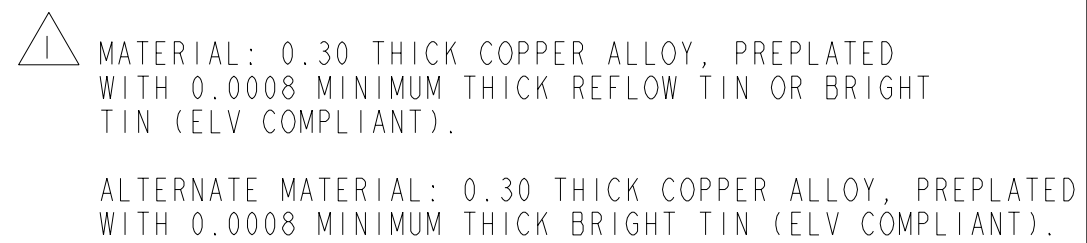

4. QUALIFICATION OF THE CRIMP APPLICATION TOOLING SHALL BE CONTROLLED BY THE REQUIREMENTS ESTABLISHED UNDER USCAR 21.
5. LOOSE END SPLICING TO BE USED.

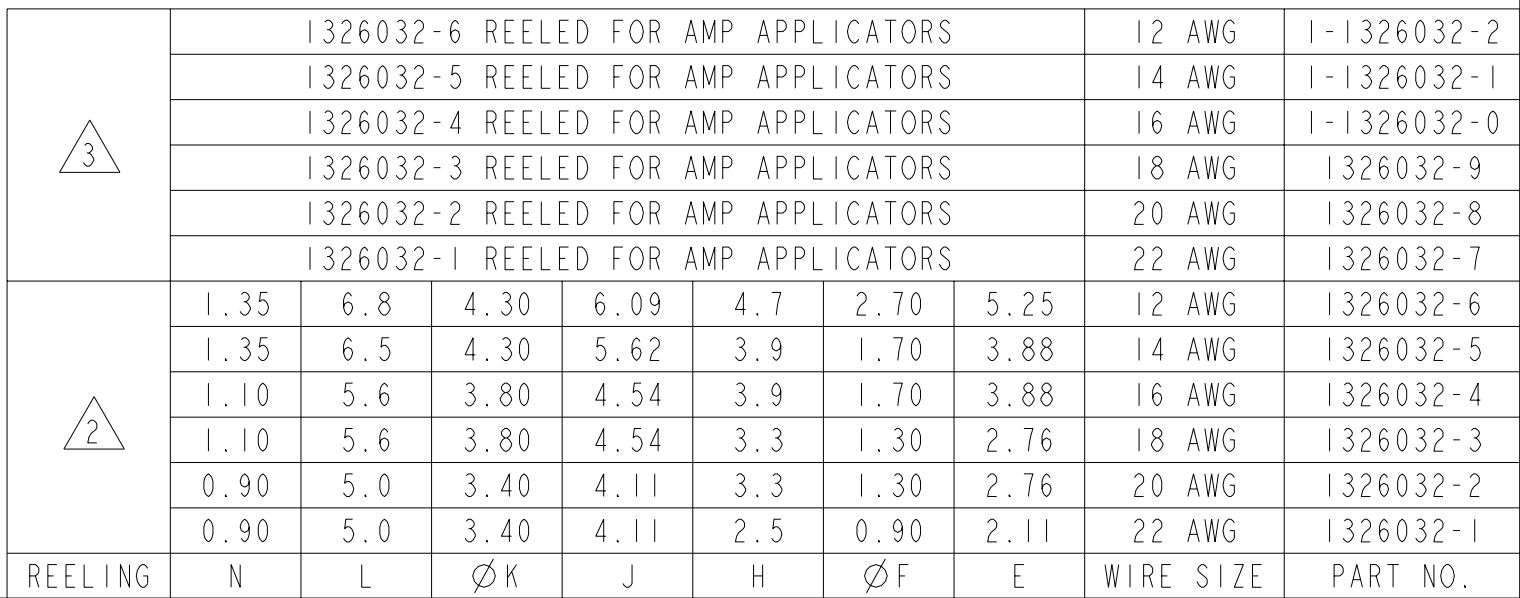

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. STRAUSSER 28APR99 CHK D. BROWN 28APR99 APP'D D. BROWN 28APR99		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC $\pm$. 2 PLC $\pm$ 0.10 3 PLC $\pm$. 4 PLC $\pm$. ANGLES $\pm$ $^{\circ}$ 45		NAME 2.8mm RECEPTACLE, SEALED	
		PRODUCT SPEC SAE/J1587-2 8/97 APPLICATION SPEC 114-13013		SIZE CAGE CODE DRAWING NO A1 00779 C=1326032	
MATERIAL 		FINISH 		RESTRICTED TO -	
		CUSTOMER DRAWING		SCALE 10:1 SHEET 1 OF 1 REV E	