




; ;;;)

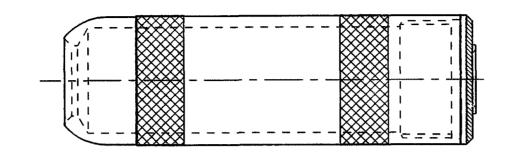

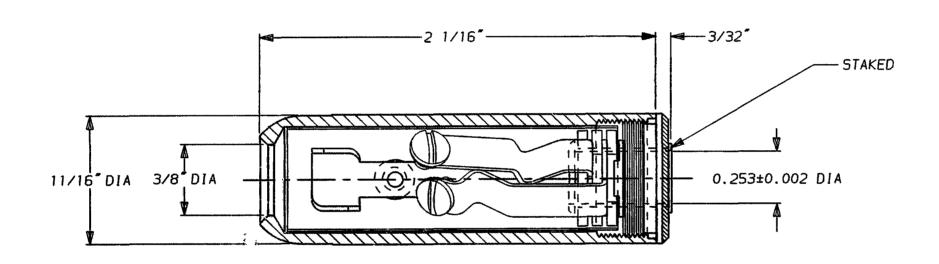



## SPECIFICATIONS:

- 1. BODY AND HANDLE BRASS-NICKEL PLATED
  2. TIP SPRING NICKEL SILVER-SPRING TEMPERED
  3. INSULATORS BAKELITE
- 4. HANDLE INSULATORS GRAY FIBRE
- 5. SLEEVE TERMINAL HOT TINNED

## (CUSTOMER DRAWING)

CAD/CAM DWG. NO. 1230.CD

SHEET 1 OF 1

					STAR SYMBOL DENOTES CRITICAL DIMENSION, SEE S/C ENGINEERING STANDARD ES-0001 UNLESS OTHERWISE SPECIFIED			S RELEASED OF		ETARY IN NATURE, DEVEL ITIAL BASIS FOR IDENTIF		
					1. ALL DIMENSIONS IN INCHES THO PLACE DECIMAL ±.01 THREE PLACE DECIMAL ±.005 FRACTIONAL DIMENSIONS ±1/54	FINISH SPEC. NO.	SPEC. NO.			MATERIAL SPEC. NO.		
					FRACTIONAL DIMENSIONS ±1/64 ANGLES ±1/2° ALL DIA'S CONCENTRIC WITHIN .005 T.I.R. 2. REMOVE ALL BURRS 3. MAKE NO DIMENSIONAL ALLOWANCES FOR	FIRST USED ON	DATE DRAWN BY CHK'D APP'S			Swileheraff		
С	CAD REDRAW WAS REV B ECO #20555	3-26-97	ОН	IJ	APPLIED FINISHES, I.E., PLATING, PAINTING, ETC.	3-24-55	MA	LD 3-30-55	LD 3-30-55			
ISSUE	CHANGE NO.	DATE	BY	APP'D	4. HOLES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±.002	The EXIENDION DACK				PART NO. 15SUE C		
ļ	REVIS	IONS			DO NOT SCALE DRAWING	<u> </u>	3 COND. SCREW TERM.				<del></del>	
						B ROUTING (46)						

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Switchcraft:

1230