
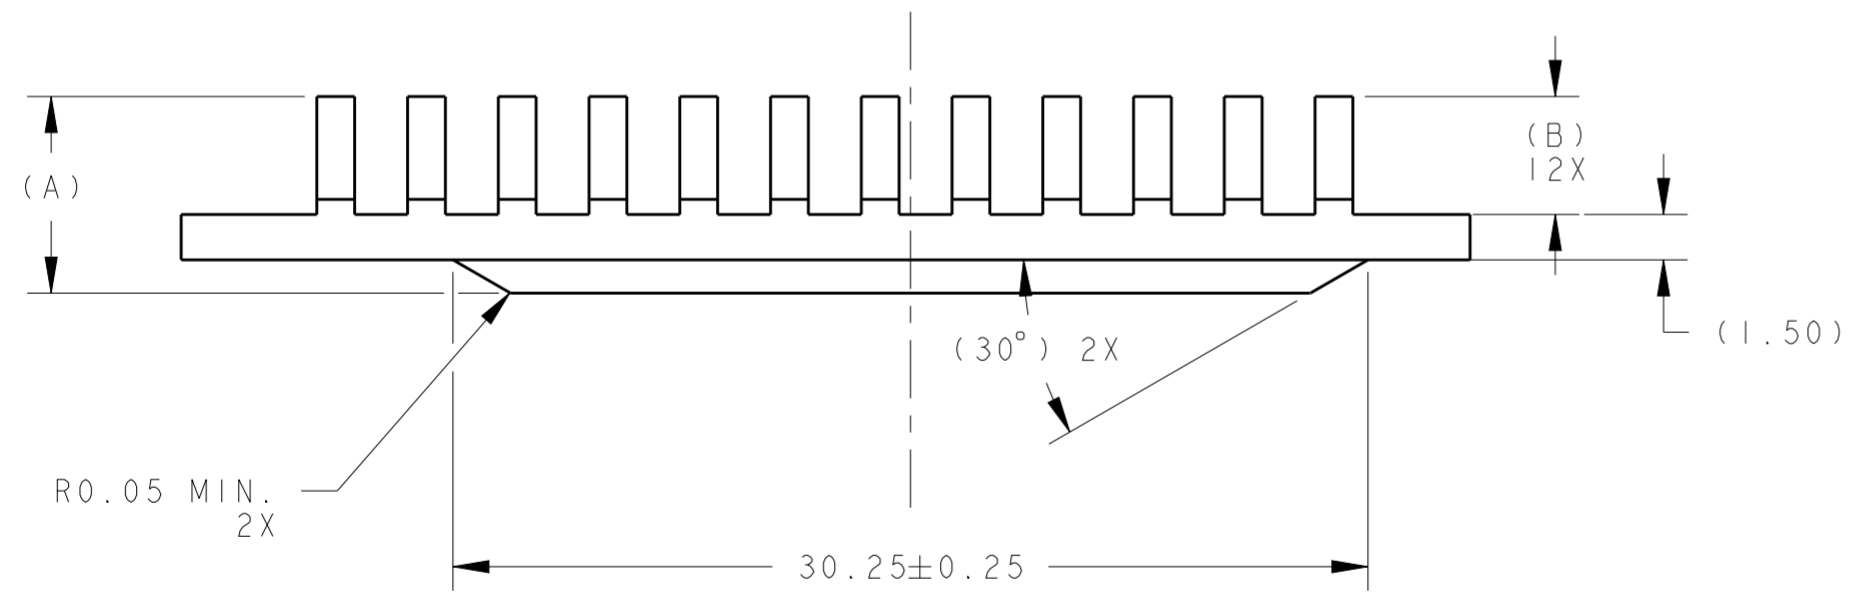
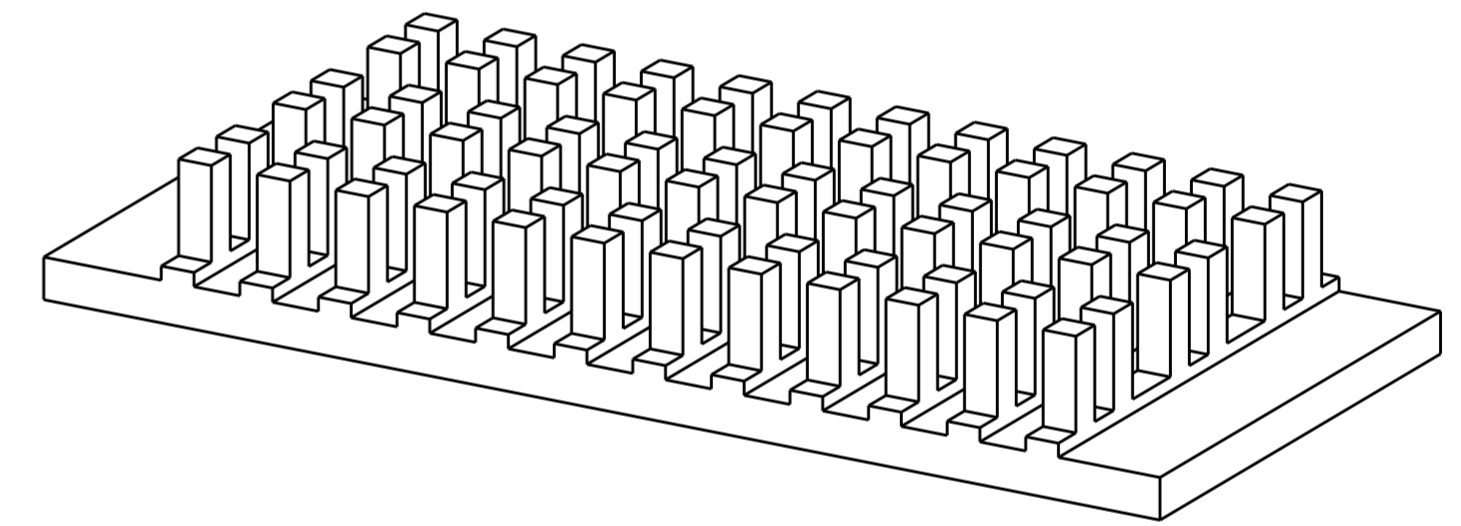
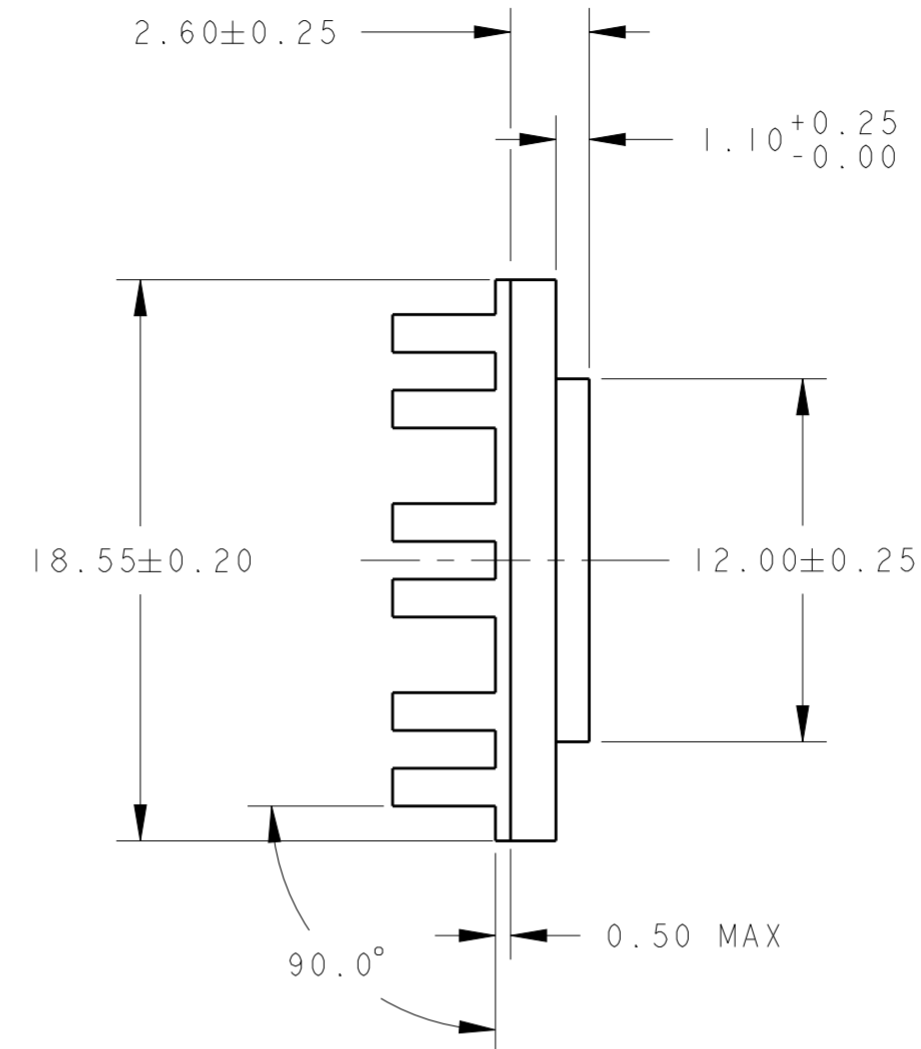


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A1		REVISED PER ECO-10-001873	19FEB2010	DH	JE
		B		REVISED PER ECO-12-005533	23MAR2012	JY	AC
		C		REVISED PER ECO-13-001969	31MAY2013	RG	AC
		D		REVISED PER ECO-13-020244	30DEC2013	ZJ	JY

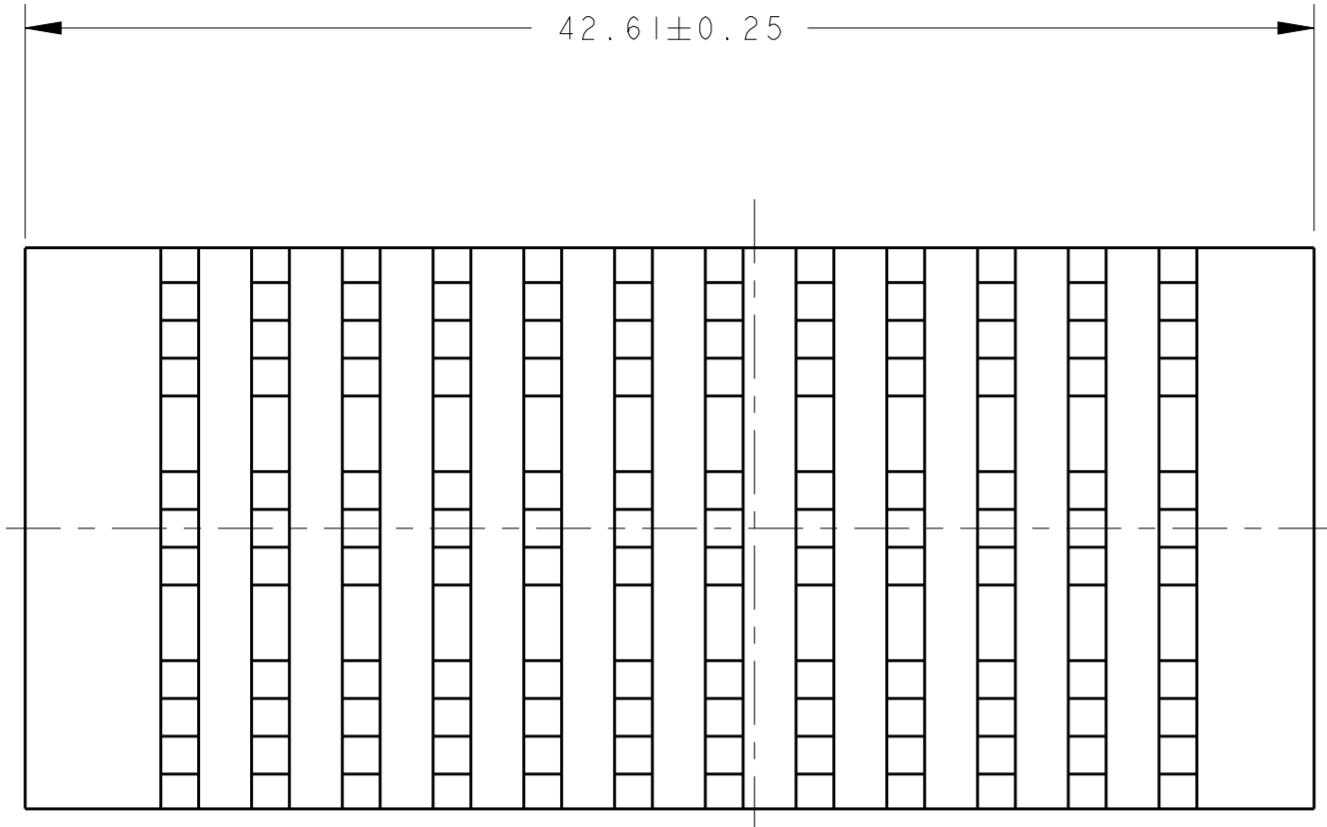

NOTES:

- UNLESS OTHERWISE SPECIFIED
- 1. INTERPRET DRAWING PER ASME Y14.5M - 1994.
- 2. 0,2mm MAX BURR.
- 3. VARIATION IN PLATING COLOR IS NORMAL AND ALLOWED.
- 4. RoHS COMPLIANT AND CERTIFIED.

BLACK ANODIZED	7.3	4.7	ALUMINUM	1963839-7
BLACK ANODIZED	6.5	3.9	ALUMINUM	1963839-4
NICKEL PLATED	6.5	3.9	ALUMINUM	1963839-2
FINISH	A	B	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN E. TAO 6-17-08	TE Connectivity
	0 PLC ± 1 PLC ±0.5 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES ±8° FINISH	CHK B. PETROCELLI 6-23-08 APVD - PRODUCT SPEC - APPLICATION SPEC - WEIGHT -	
MATERIAL SEE TABLE	SEE TABLE	Customer Drawing	NAME GANGED QSFP SAN EXTRUSION HEATSINK 6.5mm TALL SIZE A20779 CAGE CODE C-1963839 DRAWING NO - RESTRICTED TO - SCALE 2:1 SHEET 1 OF 1 REV D