

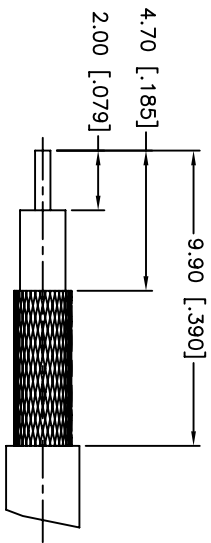
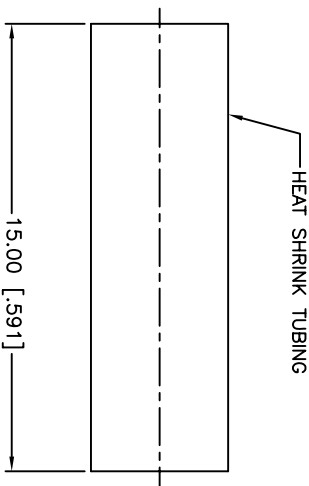
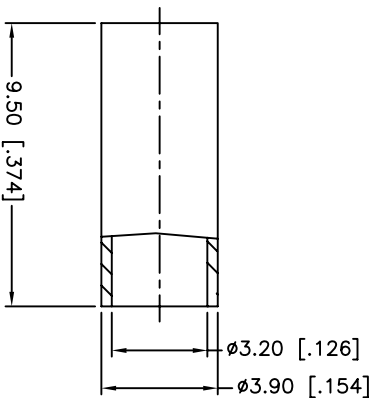


REV.	DATE	ECR NO.	DESCRIPTION
NC	09/08/11	XXXXXX	INITIAL RELEASE



RECOMMENDED
CABLE STRIPPING DIM'S

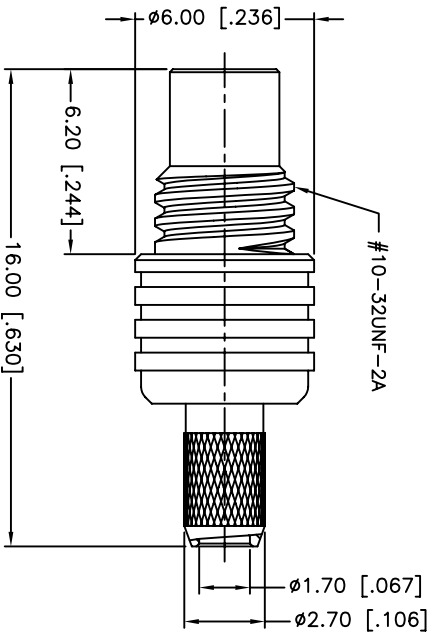

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0-10 GHz
3. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
4. CRIMPED FERRULE
5. CRIMP SIZE .128"
6. CRIMPED CONTACT PIN
7. SQ. CRIMP SIZE 0.7(mm)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND DECIMALS THEREOF. DIMENSIONS IN MILLIMETERS ARE FOR CUSTOMER REFERENCE ONLY.				UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND DECIMALS THEREOF. DIMENSIONS IN INCHES ARE FOR CUSTOMER REFERENCE ONLY.			
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND DECIMALS THEREOF. DIMENSIONS IN MILLIMETERS ARE FOR CUSTOMER REFERENCE ONLY.				UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND DECIMALS THEREOF. DIMENSIONS IN INCHES ARE FOR CUSTOMER REFERENCE ONLY.			
6	HEAT SHRINK TUBING	BLACK	1	DO NOT SCALE DRAWING	APPROVALS	DATE	PART DESCRIPTION
5	FERRULE	GOLD	1		DRAWN	M.ZHANG	09/08/11
4	CONTACT PIN	BRASS	1		CHECKED		
3	BARREL	BRASS	1		ISSUED		
2	INSULATOR	PTFE	1		SHEET	1 OF 1	
1	BODY	BRASS	1				
DESCRIPTION				MATERIAL			
FINISH				QTY			
C:/CONNEX/152103.DWG				DWG. NO.			
152103.DWG				REV.			
NC				SIZE			
A				SCALE			
NA							