

# SCC LE Series

## Low ESR Cylindrical SuperCapacitors



The new series of cylindrical electrochemical double-layer capacitors offers excellent pulse power handling characteristics based on the combination of very high capacitance and very low ESR. Used by themselves or in conjunction with primary or secondary batteries, they provide extended back up time, longer battery life, and provide instantaneous power pulses as needed. Offers great solutions to Hold Up, Energy Harvesting, and Pulse Power Applications.

### FEATURE

- Cap Values from 1F - 850F
- High pulse power capability
- Low ESR
- Low Leakage Current

### APPLICATIONS

- Power Holdup Modules
- Energy Harvesting
- UPS/Industrial
- Robotic Power
- High Pulse Current Applications

## HOW TO ORDER

| SCC                                      | W  | 50  | B                                   | 127  | S  | S  | B   | LE                                 | -  |
|--|--|---|-------------------------------------|--|--|--|---|------------------------------------|--|
| <b>Series</b><br>SuperCap<br>Cylindrical | <b>Diameter</b><br>R = 8mm<br>S = 10mm<br>U = 16mm<br>V = 18mm<br>W = 22mm<br>N = 25mm<br>X = 30mm<br>Y = 35mm | <b>Case Length</b><br>Two digits<br>represent case<br>length in mm,<br>1K = 105mm<br>1A = 115mm | <b>Voltage<br/>Code</b><br>B = 2.7V | <b>Capacitance Code</b><br>1st two digits represent<br>significant figures 3rd<br>digit represents multiplier<br>(number of zeros to follow)<br>in $\mu$ F | <b>Tolerance</b><br>P = +100%/-0%<br>S = +30%/-10% | <b>Lead Format</b><br>R = Radial<br>S = Solder Pin<br>L = Weldable Pin<br>3P = 3-Prong<br>Solder Pin | <b>Package</b><br>B = Bulk<br>A = Ammo*<br>T = Tray** | <b>Series Code</b><br>LE = Low ESR | <b>Custom Code</b><br>A1 = 4mm Bent Leads*<br>C1 = 2mm Bent Leads* |

\* Inquire about availability for Radial Leads only  
\*\*Inquire about availability

## QUALITY INSPECTION

Parts are tested for Life Cycle, high temperature load life, temperature characteristics, vibration resistance, and humidity characteristics. See page 2 for more information.

## TERMINATION

These SuperCapacitors are compatible with hand soldering, as well as reflow and wave soldering processes, so long as appropriate precautions are followed. See "Soldering recommendations" on page 6 for more information.

## OPERATING TEMPERATURE

-40°C to +65°C @ 2.7V  
-40°C to +85°C @ 2.3V



For RoHS compliant products, please select correct termination style.

# SCC LE Series

## Low ESR Cylindrical SuperCapacitors



### RATINGS & PART NUMBER REFERENCE

| AVX Part Number           | Diameter (mm) | Length (mm) | Rated Capacitance (F) | Capacitance Tolerance | Rated Voltage (V) | Rated Temperature (°C) | DCL Max @ 72 Hrs (µA) | ESR Max @ 1000 Hz (mΩ) | ESR Max @ DC (mΩ) | Peak Current (A) | Power Density (W/kg) | Max Energy (Wh) | Energy Density (Wh/kg) |
|---------------------------|---------------|-------------|-----------------------|-----------------------|-------------------|------------------------|-----------------------|------------------------|-------------------|------------------|----------------------|-----------------|------------------------|
| <b>Radial Lead</b>        |               |             |                       |                       |                   |                        |                       |                        |                   |                  |                      |                 |                        |
| SCCR12B105PRBLE           | 8             | 12          | 1                     | +100%/-0%             | 2.7/2.3*          | 65/85*                 | 6                     | 140                    | 325               | 1.02             | 2833                 | 0.0010          | 1.07                   |
| SCCR20B335PRBLE           | 8             | 20          | 3.3                   | +100%/-0%             | 2.7/2.3*          | 65/85*                 | 12                    | 60                     | 145               | 3.01             | 4161                 | 0.0033          | 2.30                   |
| SCCS20B505PRBLE           | 10            | 20          | 5                     | +100%/-0%             | 2.7/2.3*          | 65/85*                 | 15                    | 27                     | 65                | 5.19             | 6943                 | 0.0051          | 2.41                   |
| SCCS30B106PRBLE           | 10            | 30          | 10                    | +100%/-0%             | 2.7/2.3*          | 65/85*                 | 30                    | 20                     | 55                | 8.71             | 5131                 | 0.0101          | 3.27                   |
| SCCU25B256SRBLE           | 16            | 25          | 25                    | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 60                    | 15                     | 25                | 20.77            | 4793                 | 0.0253          | 3.47                   |
| SCCV40B506SRBLE           | 18            | 40          | 50                    | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 75                    | 9                      | 15                | 38.57            | 4486                 | 0.0506          | 3.89                   |
| <b>Solder Pin Lead</b>    |               |             |                       |                       |                   |                        |                       |                        |                   |                  |                      |                 |                        |
| SCCW50B127SSBLE           | 22            | 50          | 120                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 300                   | 6                      | 8                 | 82.65            | 4050                 | 0.1215          | 4.50                   |
| SCCN50B187SSBLE           | 25            | 50          | 180                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 600                   | 7                      | 10                | 86.79            | 2955                 | 0.1823          | 6.16                   |
| SCCX50B227SSBLE           | 30            | 50          | 220                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 620                   | 5                      | 6                 | 128.02           | 3038                 | 0.2228          | 4.64                   |
| SCCY68B407SSBLE           | 35            | 68          | 400                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 1000                  | 2.2                    | 3                 | 245.45           | 3352                 | 0.4050          | 4.66                   |
| <b>3-Prong Solder Pin</b> |               |             |                       |                       |                   |                        |                       |                        |                   |                  |                      |                 |                        |
| SCCX66B307S3PBLE          | 30            | 66          | 300                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 1000                  | 1.6                    | 1.9               | 257.96           | 6139                 | 0.3038          | 4.05                   |
| SCCY66B367S3PBLE          | 35            | 66          | 360                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 1300                  | 2.0                    | 2.5               | 255.79           | 3763                 | 0.3645          | 3.92                   |
| SCCY69B407S3PBLE          | 35            | 69          | 400                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 1300                  | 1.3                    | 1.4               | 346.15           | 6719                 | 0.4050          | 4.35                   |
| SCCY83B507S3PBLE          | 35            | 83          | 500                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 1500                  | 1.2                    | 1.35              | 402.99           | 6480                 | 0.5063          | 5.06                   |
| SCCY83B607S3PBLE          | 35            | 83          | 600                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 1500                  | 1.18                   | 1.33              | 450.50           | 6090                 | 0.6075          | 5.63                   |
| SCCY1KB707S3PBLE          | 35            | 105         | 700                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 1900                  | 1.1                    | 1.2               | 513.59           | 5608                 | 0.7088          | 5.45                   |
| SCCY1AB857S3PBLE          | 35            | 115         | 850                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 2200                  | 1.0                    | 1.16              | 577.79           | 5096                 | 0.8606          | 5.82                   |
| <b>Weldable Pin Lead</b>  |               |             |                       |                       |                   |                        |                       |                        |                   |                  |                      |                 |                        |
| SCCY71B407SLBLE           | 35            | 71          | 400                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 1300                  | 1.3                    | 1.8               | 313.95           | 5461                 | 0.4050          | 4.55                   |
| SCCY73B407SLBLE           | 35            | 73          | 400                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 1000                  | 1.8                    | 2.5               | 270.00           | 3845                 | 0.4050          | 4.45                   |
| SCCY83B507SLBLE           | 35            | 83          | 500                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 1500                  | 1                      | 1.6               | 375.00           | 5110                 | 0.5063          | 4.73                   |
| SCCY83B607SLBLE           | 35            | 83          | 600                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 1500                  | 1                      | 1.6               | 413.27           | 5110                 | 0.6075          | 5.68                   |
| SCCY85B607SLBLE           | 35            | 83          | 600                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 1500                  | 1.6                    | 1.8               | 389.42           | 4459                 | 0.6075          | 5.57                   |
| SCCY1KB707SLBLE           | 35            | 105         | 700                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 1900                  | 0.9                    | 1.45              | 468.98           | 4986                 | 0.7088          | 5.86                   |
| SCCY1AB857SLBLE           | 35            | 115         | 850                   | +30%/-10%             | 2.7/2.3*          | 65/85*                 | 2200                  | 0.8                    | 1.3               | 545.13           | 4547                 | 0.8606          | 5.82                   |


\*with appropriate voltage derating operating temperature can be extended to 85°C

### QUALIFICATION TEST SUMMARY


| Test                                | Test Method   | Parameter                               | Limits   |
|-------------------------------------|---|---|--|
| Life Cycle                          | Capacitors are cycled between rated voltage and half-rated voltage under constant current at +25°C for 500,000 cycles | Capacitance Change<br>ESR<br>Appearance | ≤30% of initial spec value<br>≤2 times initial spec value<br>No remarkable defects |
| High Temperature Load Life          | Temperature: +65°C<br>Voltage: Rated Voltage<br>Test Duration: 2,000 hours  | Capacitance Change<br>ESR<br>Appearance | ≤30% of initial spec value<br>≤2 times initial spec value<br>No remarkable defects |
| Storage Temperature Characteristics | Storage Duration: 2 years<br>No Load<br>Temperature: +35°C  | Capacitance Change<br>ESR<br>Appearance | ≤30% of initial spec value<br>≤2 times initial spec value<br>No remarkable defects |
| Vibration Resistance                | Amplitude: 1.5mm<br>Frequency: 10 ~ 55Hz<br>Direction: X, Y, Z for 2 hours each                                       | Capacitance Change<br>ESR<br>Appearance | ≤30% of initial spec value<br>≤2 times initial spec value<br>No remarkable defects |
| Humidity                            | Voltage: Rated Voltage<br>RH: 90%<br>Temperature: +60°C<br>Test Duration: 1,500 hours                                 | Capacitance Change<br>ESR<br>Appearance | ≤30% of initial spec value<br>≤2 times initial spec value<br>No remarkable defects |

**QUALITY AND RELIABILITY**


**Capacitance vs. Temperature**

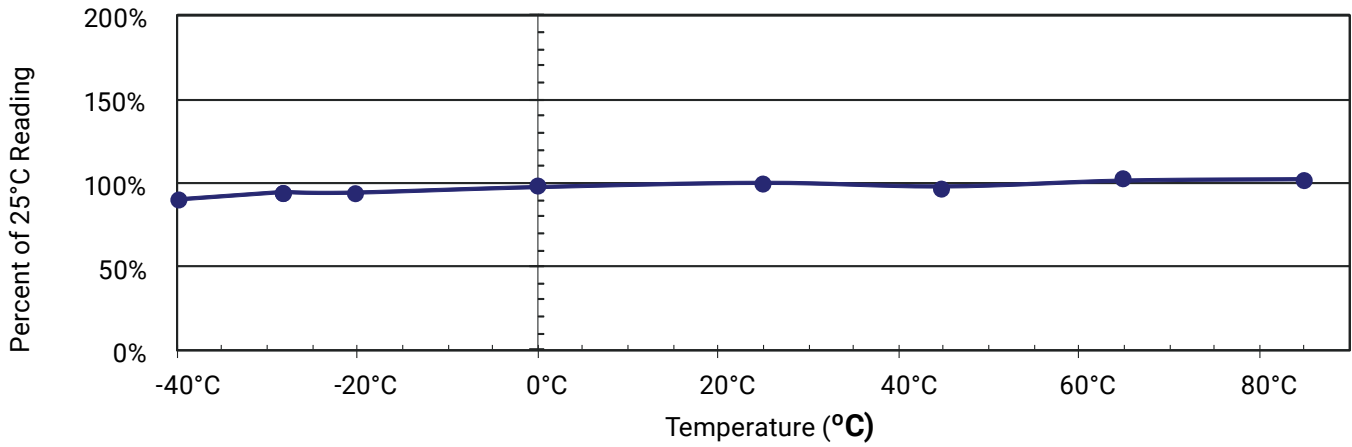

**Leakage Current vs. Temperature**

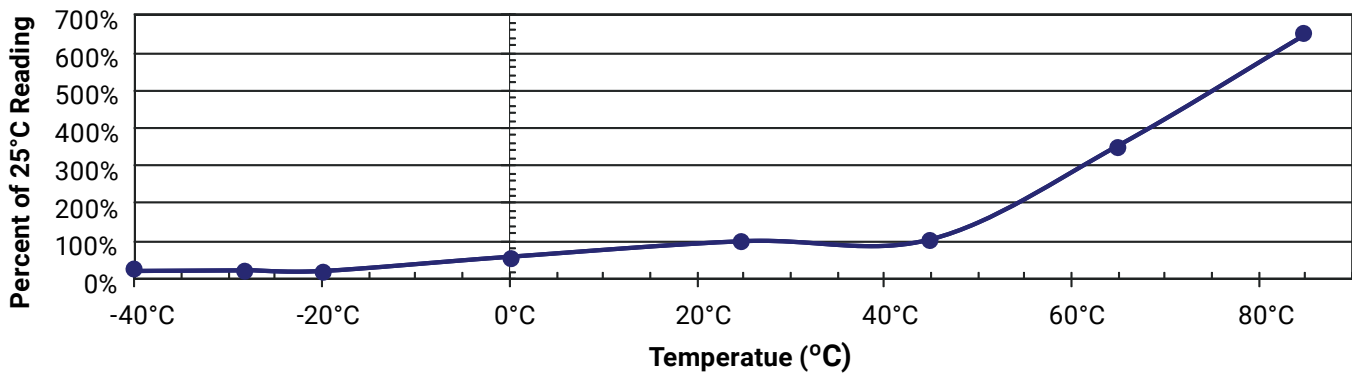

**Equivalent Series Resistance vs. Temperature**

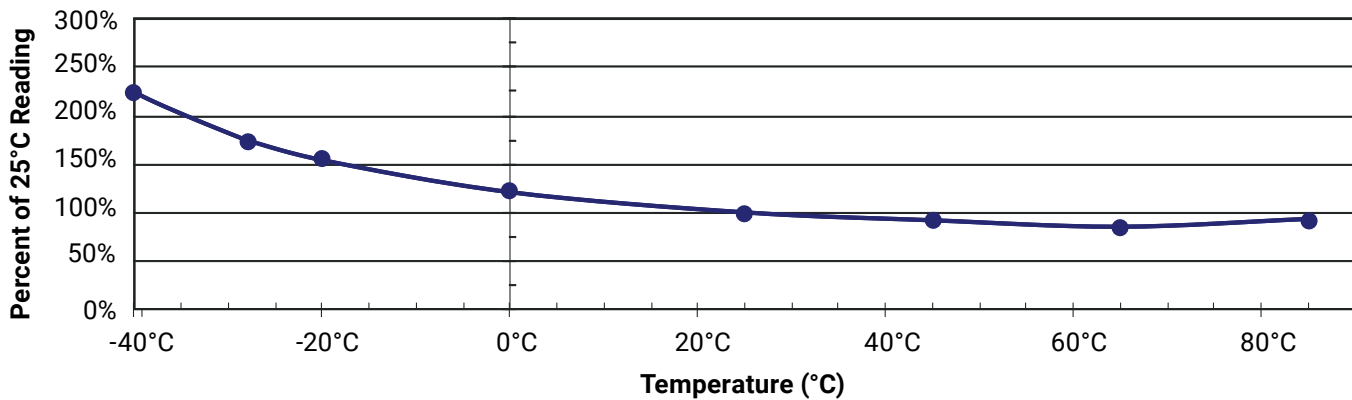


# SCC LE Series

## Low ESR Cylindrical SuperCapacitors




### MECHANICAL SPECIFICATIONS

#### RADIAL LEAD TYPE

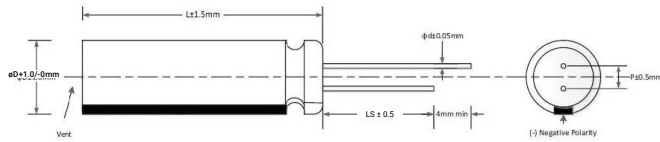


| D (mm) | P (mm) | d(mm) |
|--------|--------|-------|
| 8      | 3.5    | 0.6   |
| 10     | 5.0    | 0.6   |
| 16     | 7.5    | 0.8   |
| 18     | 8.0    | 0.8   |

#### RADIAL BENT LEAD TYPE

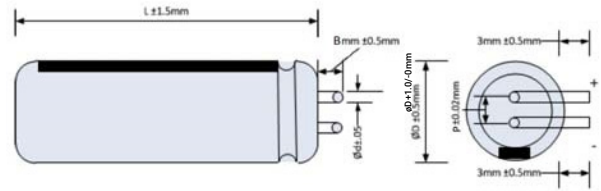


| Style | B (mm) |
|-------|--------|
| A1    | 4      |
| C1    | 2      |

#### SOLDER PIN TYPE 2-PIN 120F, 180F, 220F PARTS

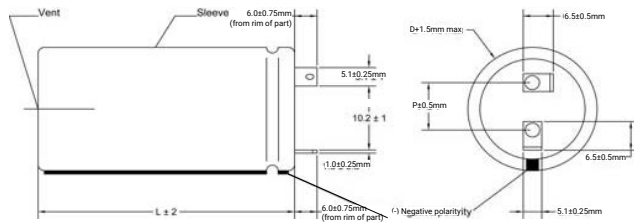

| Cap (F) | D (mm) | L (mm) | P (mm) |
|---------|--------|--------|--------|
| 120     | 22     | 50     | 8.0    |
| 180     | 25     | 50     | 10.0   |
| 220     | 30     | 50     | 10.5   |


#### SOLDER PIN TYPE 4-PIN 400F PART

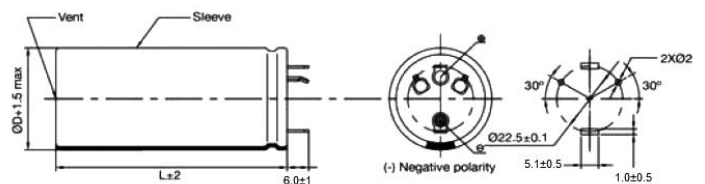

| D (mm) | L (mm) |
|--------|--------|
| 35     | 68     |

#### WELDABLE PIN TYPE 2-PIN 400F, 600F PARTS


(Note exact PNs in table)

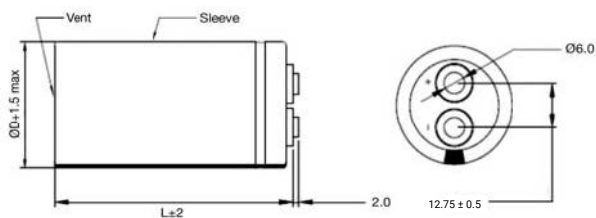

| AVX PN          | D (mm) | L (mm) |
|-----------------|--------|--------|
| SCCY73B407SLBLE | 35     | 73     |
| SCCY85B607SLBLE | 35     | 83     |

#### WELDABLE PIN TYPE AXIAL 400F - 850F PARTS

(Note exact PNs in table)

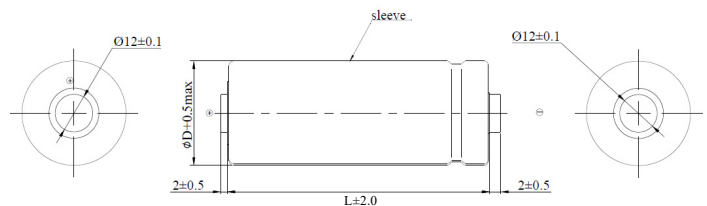

| AVX PN          | Cap (F) | D (mm) | L (mm) |
|-----------------|---------|--------|--------|
| SCCY71B407SLBLE | 400     | 35     | 71     |
| SCCY83B507SLBLE | 500     | 35     | 83     |
| SCCY83B607SLBLE | 600     | 35     | 83     |
| SCCY1KB707SLBLE | 700     | 35     | 105    |
| SCCY1AB857SLBLE | 850     | 35     | 115    |




# SCC LE Series

## Low ESR Cylindrical SuperCapacitors



### MECHANICAL SPECIFICATIONS CONTINUED

#### 3-PRONG SOLDER PIN

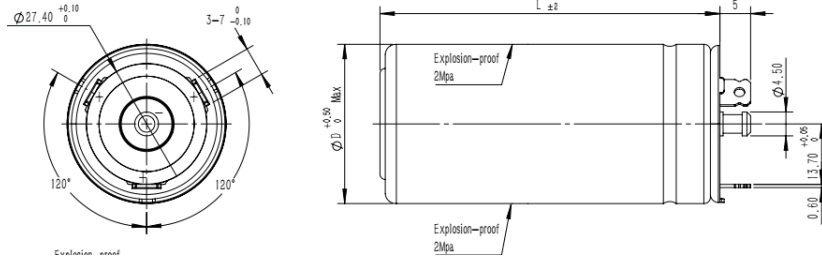

| Cap (F) | D (mm) | L (mm) |
|---------|--------|--------|
| 300     | 30     | 66     |
| 360     | 35     | 66     |
| 400     | 35     | 69     |
| 500     | 35     | 83     |
| 600     | 35     | 83     |
| 700     | 35     | 105    |
| 800     | 35     | 115    |

#### Precautionary Warning!

If these 3-Prong Solder Pin parts are used in series-connected module assembly, these parts utilize the outer aluminum casing as the positive connection. Do not use parts if the shrink wrap is split open or if the casing is exposed. Maintain proper part spacing in module designs, as part-to-part potential can create a deadly situation (i.e. try to avoid having part one very close to part 20 or higher, and so on). It is recommended to have the tops of parts covered with insulation material to avoid inadvertent shorting in module designs. If you have any questions please contact AVX.

### SOLDERING RECOMMENDATIONS

When soldering SuperCapacitors to a PCB, the temperature & time that the body of the SuperCapacitor sees during soldering can have a negative effect on performance. We advise following these guidelines:

- Do not immerse the SuperCapacitors in solder. Only the leads should come in contact with the solder.
- Ensure that the body of the SuperCapacitor is never in contact with the molten solder, the PCB or other components during soldering.
- Excessive temperatures or excessive temperature cycling during soldering may cause the safety vent to burst or the case to shrink or crack, potentially damaging the PCB or other components, and significantly reduce the life of the capacitor.

### HAND SOLDERING

Keep distance between the SuperCapacitor body and the tip of the soldering iron and the tip should never touch the body of the capacitor. Contact between SuperCapacitor body and soldering iron will cause extensive damage to the SuperCapacitor, and change its electrical properties. It is recommended that the soldering iron temperature should be less than 350°C, and contact time should be limited to less than 4 seconds. Too much exposure to terminal heat during soldering can cause heat to transfer to the body of the SuperCapacitor, potentially damaging the electrical properties of the SuperCapacitor.

### WAVE SOLDERING

Only use wave soldering on Radial type SuperCapacitors. The PCB should be preheated only from the bottom and for less than 60 seconds, with temperature at, or below, 100°C on the top side of the board for PCBs equal to or greater than 0.8 mm thick.

| Solder Temperature (°C) | Suggested Solder Time (s) | Maximum Solder Time (s) |
|-------------------------|---------------------------|-------------------------|
| 220                     | 7                         | 9                       |
| 240                     | 7                         | 9                       |
| 250                     | 5                         | 7                       |
| 260                     | 3                         | 5                       |

### REFLOW SOLDERING

Infra red or conveyor over reflow techniques can be used on these SuperCapacitors. Do not use a traditional reflow oven without clear rated reflow temperature for SuperCapacitors.

### WELDING RECOMMENDATIONS

When weld-assembling modules, it is recommended using 2mm thick 1060 aluminum.

For WELDABLE PIN TYPE 2-PIN cells, it is recommended to use 0.6 optical fiber 600W laser welding machine. These cells need 30 weld points.


For WELDABLE PIN TYPE AXIAL cells, the same parameters are recommended, however these cells need 60 weld points.

Be sure to refer to page 4 for exact pin type and mechanical dimensions of respective weldable pin cells.

### TEST METHODS

#### IEC CAPACITANCE TEST METHOD

- Capacitance is measured using a Keithley 2400 or 2602 Meter
- Procedure
  - Charge Capacitor to Rated Voltage at room temperature
  - Disconnect parts from voltage to remove charging effects
  - Discharge cells with a constant current I determined by  $4 * C * VR$
  - Noting V1, t1, V2, t2 and performing the calculation for C

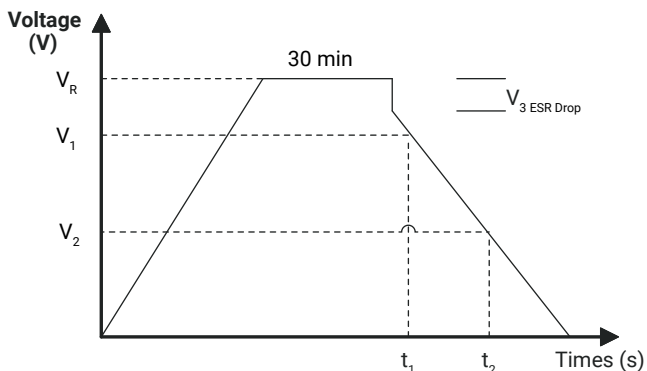

I – Discharge Current [mA],  $4 * C * VR$  VR – Rated Voltage

V1 – Initial Test Voltage, 80% of VR

V2 – Final Test Voltage, 40% of VR


t1 – Initial Test time

t2 – Final Test time

$$C = I * (t2 - t1) / (V1 - V2)$$

#### DCL MEASUREMENT @ 25°C

- DCL is measured using a Multimeter with high internal impedance across a resistor
  - Charge Capacitor to Rated Voltage at room temperature for 72 Hours
  - Disconnect parts from Voltage by opening switch 1 (Stabilize for 10 Min)
  - Measure Voltage across a known Valued Resistor (1K Ohm)
  - Calculate DCL = V/R

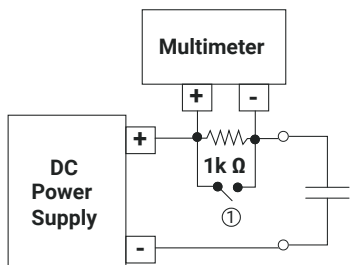


#### INITIAL ESR MEASUREMENT @ 25°C

- Using an Agilent 4263B LCR Meter and a Kelvin connection
  - Measure at frequency of 1000 Hz
  - Measurement Voltage of 10mV

#### DC ESR MEASUREMENT

- Six steps capacity and ESRDC Test Method is used as illustrated in the figure right.
- Tests are carried out by charging and discharging the capacitor for two cycles at rated voltage and half rated voltage

- $C = (CDC1 + CDC2) / 2$
  - $ESRDC = (ESRDC1 + ESRDC2) / 2$
- Where:  $CDC1 = I2 * (t5 - t4) / (V3 - V4)$   
 $CDC2 = I2 * (t11 - t10) / (V9 - V10)$   
 $ESRDC1 = (V5 - V4) / I2$   
 $ESRDC2 = (V11 - V10) / I2$

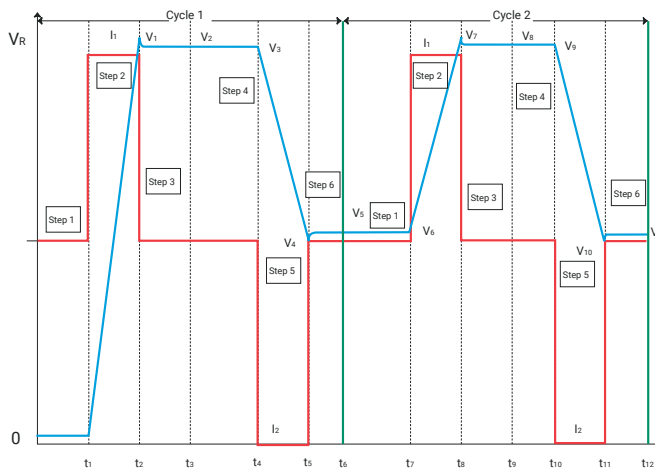

$$I1 = I2 = 75mA/F$$

#### MAXIMUM OPERATING CURRENT

- This is the maximum current when capacitor temperature rise of the capacitor during its operation is less than 15°C

#### MAXIMUM PEAK CURRENT

- This is the maximum current in less than 1 sec

#### WATT DENSITY

- Watt Density =  $(0.12 * V^2 / RDC) / \text{mass}$

#### ENERGY DENSITY

- Energy density =  $(\frac{1}{2} CV^2) / (3600 * \text{mass})$

### POLARITY / REVERSE VOLTAGE

For product consistency and optimum performance, it is recommended that the capacitor be connected with polarity indicated. Reversing polarity could result in permanent damage to the circuit including much higher leakage current for a short duration of time and the life time of the SuperCapacitors will be reduced.


### LIFE TIME AND TEMPERATURE PERFORMANCE

The life of a SuperCapacitor is impacted by a combination of operating voltage and the operating temperature according to the following equation:


time to failure,  $t \propto V^n \cdot \exp(-Q / k \cdot T)$  .....(1) where V is the voltage of operation, Q is the activation energy in electron volts (eV), k is the Boltzmann's constant in eV and T is the operating temperature in °K (where K is in degrees Kelvin). Typical values for the voltage exponent, n, is between 2.5 - 3.5, and Q is between 1.0 - 1.2 eV in the normal operating temperature range of 40° to 65°C.

The industry standard for SuperCapacitor end of life is when the equivalent series resistance, ESR, increases to 200% of the original value and the capacitance drops by 30%. Typically a super-capacitance shows an initial change in the ESR value and then levels off. If the capacitors are exposed to excessive temperatures the ESR will show a continuous degradation. In the extreme case, if the temperatures or voltages are substantially higher, than the rated voltage, this will lead to cell leakage or gas leakage and the product will show a faster change in the ESR which may increase to many times the original value.

Expected Lifetime at Various Voltages  
SCC Series, 2.7V Rated

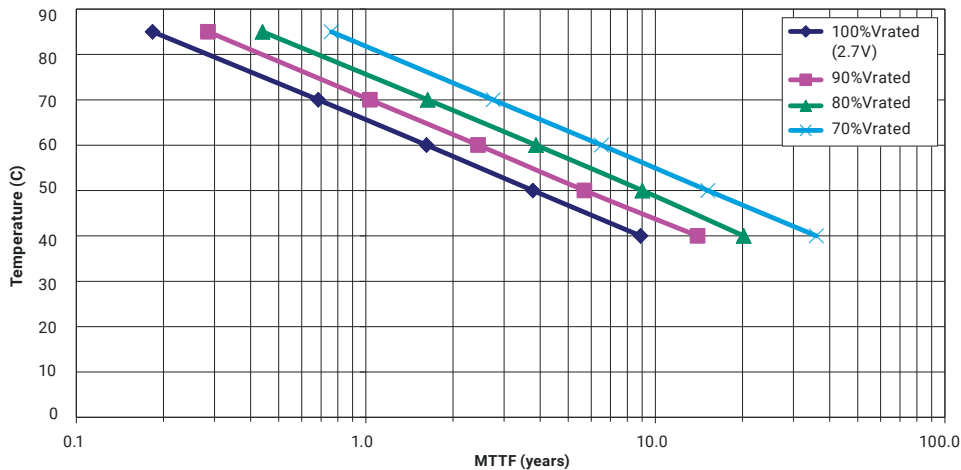

Expected Lifetime at Various Voltages  
SCC Series, 2.3V Rated

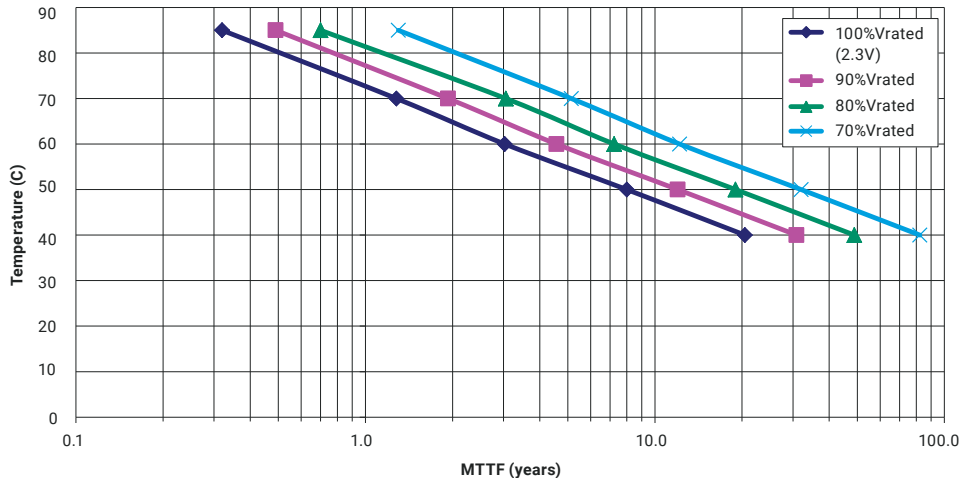



# SCC LE Series

## Low ESR Cylindrical SuperCapacitors



### SAFETY RECOMMENDATIONS

#### WARNINGS

- To Avoid Short Circuit, after usage or test, SuperCapacitor voltage needs to discharge to  $\leq 0.1V$
- Do not Apply Overvoltage, Reverse Charge, Burn or Heat Higher than  $150^{\circ}C$ , explosion-proof valve may break open
- Do not Press, Damage or disassemble the SuperCapacitor, housing could heat to high temperature causing Burns
- If you observe Overheating or Burning Smell from the capacitor disconnect Power immediately, and do not touch

#### EMERGENCY APPLICATIONS

- If Housing is Leaking:
  - Skin Contact: Use soap and water thoroughly to wash the area of the skin
  - Eye Contact: Flush with flowing water or saline, and immediately seek medical treatment
  - Ingestion: Immediately wash with water and seek medical treatment

#### TRANSPORTATION

Not subjected to US DOT or IATA regulations  
UN3499, <10Wh, Non-Hazardous Goods  
International shipping description –  
"Electronic Products – Capacitor"

#### REGULATORY

- UL 810A
- RoHS Compliant
- Reach Compliant / Halogen Free

#### STORAGE

- Capacitors may be stored within the operating temperature range of the capacitor
- Lower storage temperature is preferred as it extends the shelf life of the capacitor
- Do Not Store the SuperCapacitors in the following Environments
  - High Temperature / High Humidity environments  $>40^{\circ}C / 70\% RH$
  - Direct Sunlight
  - In direct contact with water, salt oil or other chemicals
  - In direct contact with corrosive materials, acids, alkalis, or toxic gases
  - Dusty environment
  - In environment with shock and vibration conditions

Licensed by CAP-XX



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at [www.avx.com/disclaimer/](http://www.avx.com/disclaimer/) by reference and should be reviewed in full before placing any order.