


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	08DEC2015	DW	CW
	A1	ECR-17-009384	25DEC2017	RL	CW

ASSEMBLY STATE OF THE PRODUCT, FOR REFERENCE

产品装配状态, 供参考

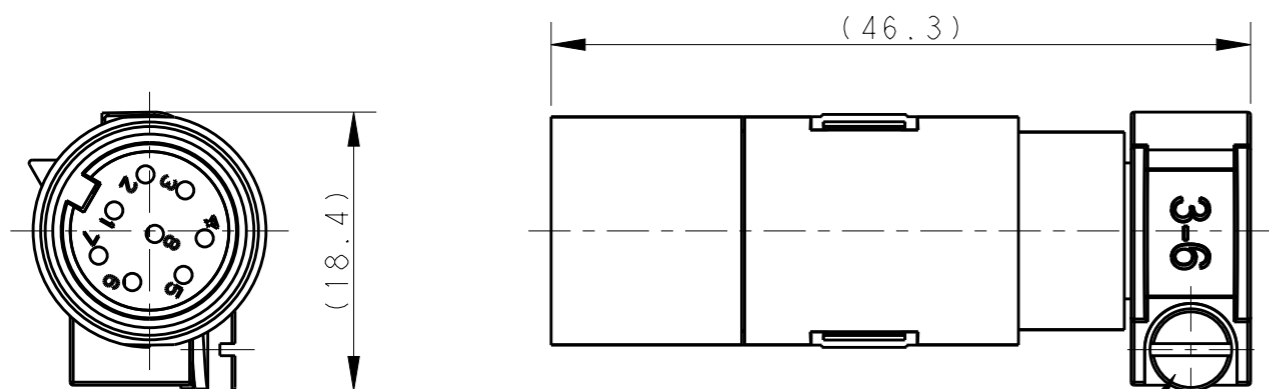


M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5 Nm
M3螺丝, 推荐锁紧力矩 0.5 Nm

NOTES:

- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 50V
RATED CURRENT: 5A
RATED IMPULSE VOLTAGE: 0.8KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
WIRE RANGE: 0.08-0.52 mm² (28-20 AWG)
CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20700X10XX000)


注释:

- 技术参数:
绝缘材料: PC
额定电压: 50V
额定电流: 5A
额定脉冲电压: 0.8KV
污染等级: 3
阻燃等级: UL94V-0
接线范围: 0.08-0.52 mm² (28-20 AWG)
接线类型: 冷压接
- 端子需要单独订购.
(订货号参考图面: T20700X10XX000)

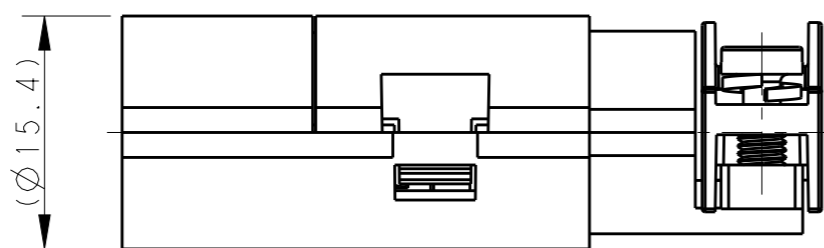


FOR Ø6-9.5mm CABLE
用于直径Ø6-9.5mm 电缆线

FOR Ø3-6mm CABLE
用于直径Ø3-6mm 电缆线

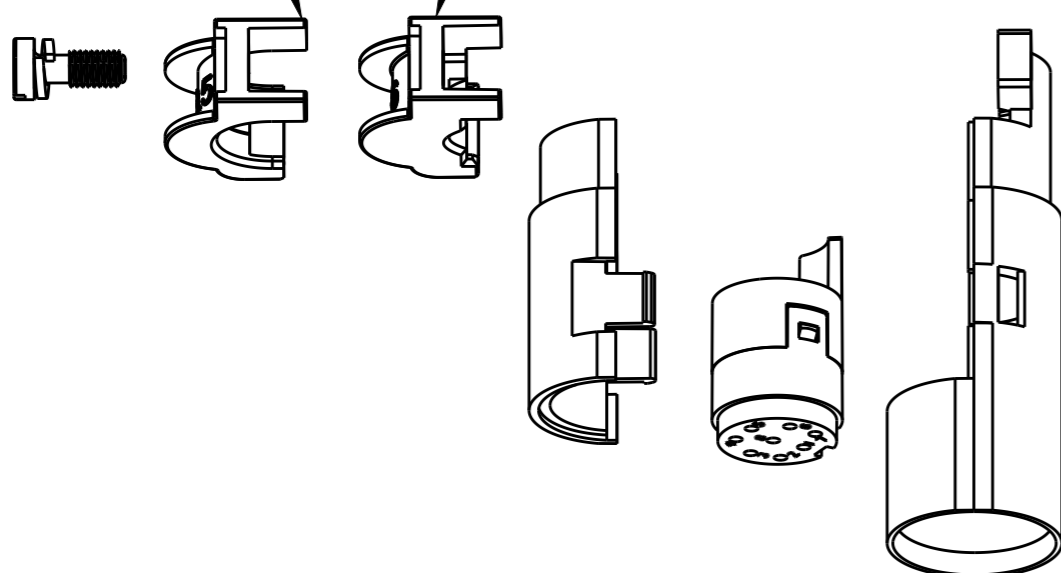

T2580081154-000	PIN-Q3-M	QUINTAX MALE CONTACT 8-POS QUINTAX 8-POS公针
PART NUMBER 料号	PART DESCRIPTION 描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08DEC2015 David Wang	 TE Connectivity	
DIMENSIONS: mm		CHK 08DEC2015 Chris Wang		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 08DEC2015 Xiang Xu	NAME QUINTAX MALE CONTACT 8-POS PIN-Q3-M	
0 PLC ±-		PRODUCT SPEC 108-137067	SIZE A3	
1 PLC ±-		APPLICATION SPEC 114-137067	CAGE CODE 00779	DRAWING NO T2580081154000
2 PLC ±-		WEIGHT -	RESTRICTED TO -	
3 PLC ±-				
4 PLC ±-				
ANGLES ±-				
MATERIAL -				
FINISH -				
		Customer Drawing	SCALE 2:1	SHEET 1 OF 1
			REV A1	