

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-16-008648	16JUN2016	WZ	GG

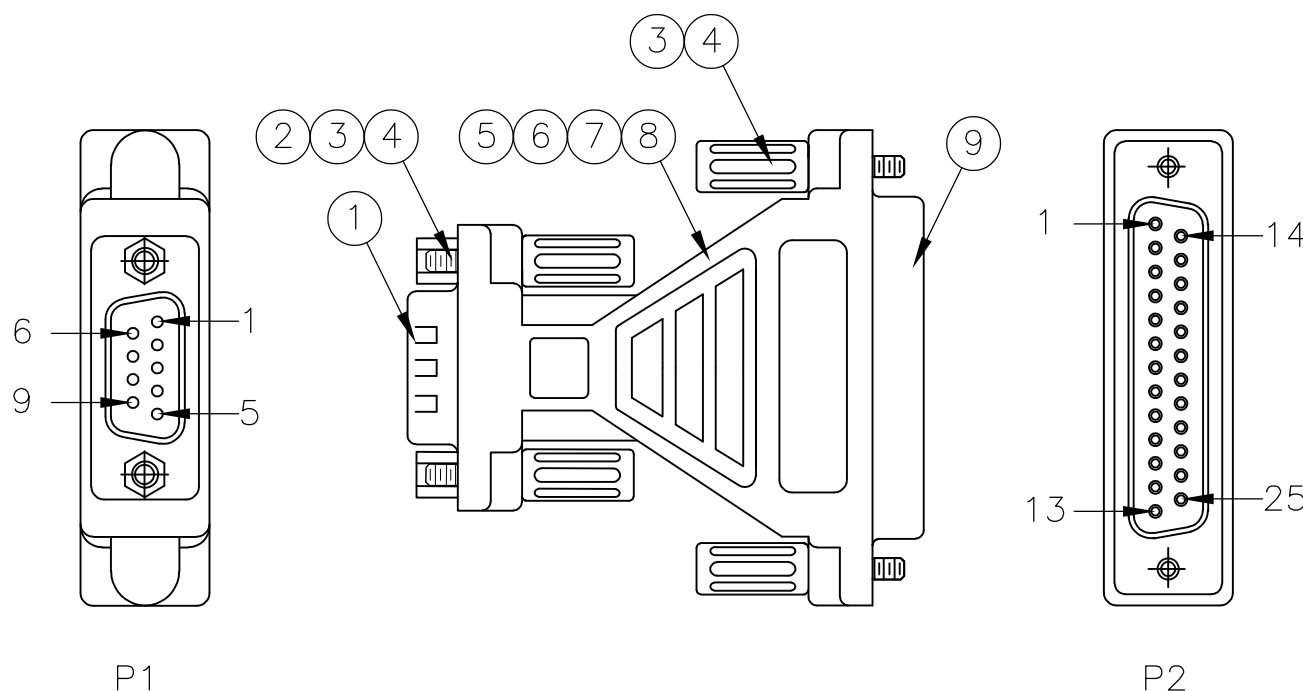

NOTES:

- PACKAGED IN PRINTED ZIPLOCK POLYBAG.
- LABEL ON POLYBAG TO READ AS FOLLOWS:

621783-1 AT ADAPTER (DB9M/DB25F)

- WRAP FOIL OVER PRE-MOLD 360° FROM CONNECTOR SHELL TO SHELL.
- IF USING ALUMINUM MYLAR FOIL, ALUMINUM MUST BE FACING INWARD.
- THIS PRODUCT IS PRODUCED IN COMPLIANCE WITH ANSI/ASQC Z1.4-1993, TO AN INSPECTION LEVEL III, WITH A NORMAL SAMPLING PLAN.
- TEST REQUIREMENT:
 CONTINUITY RESISTANCE: 1 ohm MAX,
 INSULATION RESISTANCE: 50 M ohm MIN.
 HI-POT TEST: DC 300V/0.01 Sec MIN.
- PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ENVIRONMENTAL STANDARD 230-702.

TE P/N: 621783-1

P1	P2
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
SHELL	1+SHELL

1	PC	DB25 FEMALE, SOLDER TYPE, CONTACT: GOLD FLASH, SHELL: NICKEL PLATED, INSULATION COLOR: BLACK.	9
AR	MR	UL1007 28AWG, COLOR: BLACK.	8
AR	MR	ALUMINUM FOIL, W: 35.0MM.	7
AR	KG	INNER MOLD PE.	6
AR	KG	MOLD PVC, 40P, COLOR: BEIGE(BG01).	5
AR	KG	MOLD PVC, 30P, COLOR: BEIGE(BG01).	4
4	PC	#4-40 THUMBSCREW.	3
2	PC	#4-40 HEX NUT, 5.0*6.0MM.	2
1	PC	DB9 MALE, SOLDER TYPE, CONTACT: GOLD FLASH, SHELL: INSULATION COLOR: BLACK.	1
QTY	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.EISENTRAU 12-16-96	TE Connectivity ADAPTER, DB9 MALE TO DB25 FEMALE, OVERMOLDED				
DIMENSIONS: mm		CHK R.CAPP 12-20-96					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D.WILSON 12-20-96					
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC					
MATERIAL		APPLICATION SPEC	NAME	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
-		FINISH	-	-	-	A300779	C-621783
CUSTOMER DRAWING			WEIGHT	SCALE	SHEET	REV	
-			0.000000	N.T.S	1 OF 1	B	