

5


4

3



2

1


Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75.01-802

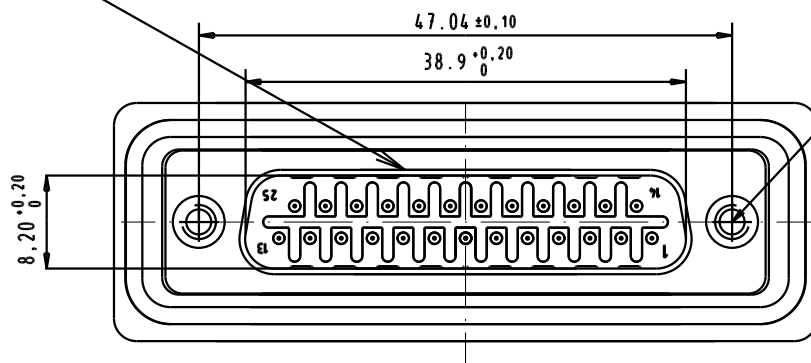

4-40 UNC -2B
length of engagement 3.5

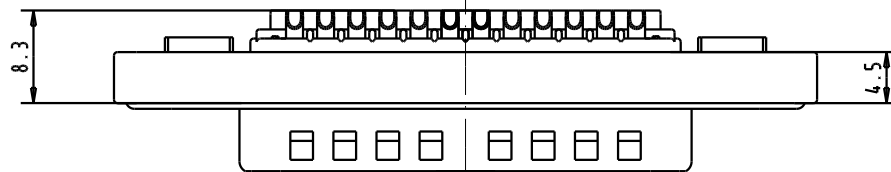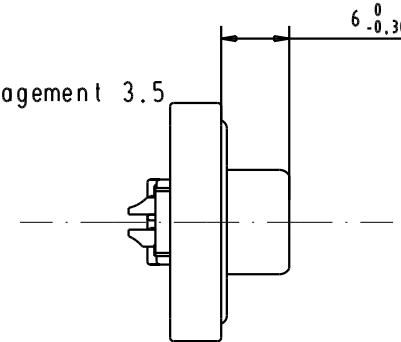


- 1) Protection standard IP 67 according to IEC 529 / DIN 40050.
- 2) cable: AWG 20 max

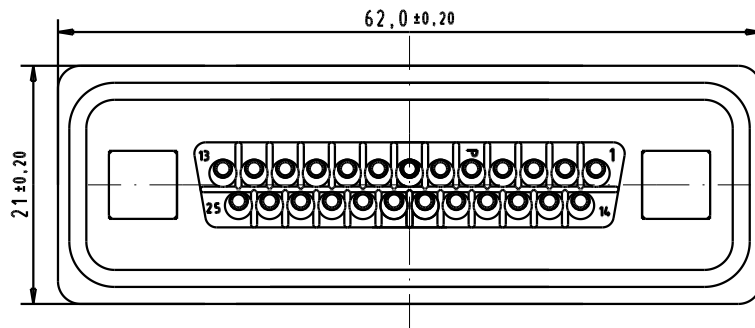

09 67 525 7615 Au plating 0,76 µm mini

Detl. 03/02/04 S.H.
Insp.
Stand.



D-SUB IP67 male 25 Poles
straight solder cup with
4-40 UNC nut plastic frame

Moßstab/
Scale

HARTING ELEKTRONIK
F-95972 Paris



TB 09 67 525 7615

Blatt/ Page

Part Number

Performance Level

31587 03/02/04 S.H.
Mod. Dat. Name

Sub.