




- Wire ————— Cu tinned
- Gauge ————— AWG 28/7
- Voltage rating ————— 300 Vr.m.s
- Conductor resistance ————— 221 mΩ/m
- Capacity unbalanced ————— 49 pF/m
- Impedance unbalanced ————— 105 Ω
- Signal delay ————— 5,2 ns/m
- Insulation material ————— PVC
- Temperature rating ————— -20°C to +105°C
- Flammability rating ————— UL: VW1
- Insulation resistance ————— 1000 MΩ/km

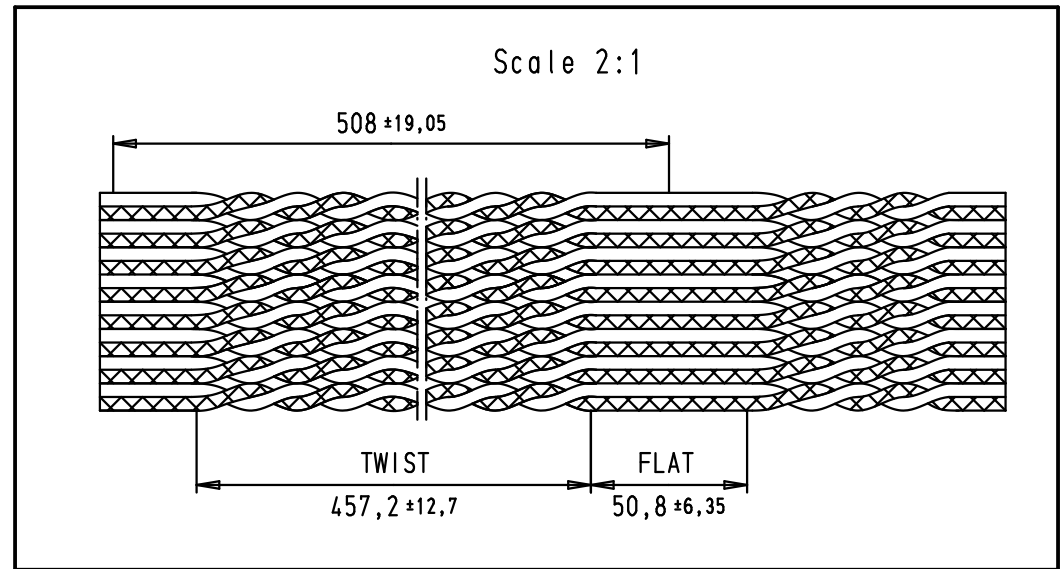

Colour code sequence (in 10 steps):
brown, red, orange, yellow, green,
blue, violet, grey, white, black

| | | | | | | | | |
|-------|----------|------|-------------------------------|----------|------|---|---|-------------------|
| | | | | Dot. | Name |  All Dim. in mm Orig. Size DIN A 4 | SEK 18 Flat cable 16 poles, twisted pair, length per reel: 30,48 m colour coded, UL 20130, IEC 918 | Maßstab/ Scale |
| | | | Detail. | 25/10/05 | JMDR | | | 10:1 |
| | | | Insp. | | | | | |
| | | | Stand. | | | | | |
| 33990 | 15/05/07 | PK | HARTING EURL F-95972 Paris | | |  | TB 09 18 016 7006 | Blatt/ Page |
| 33247 | 25/10/05 | JMDR | | | | | | 1 1 |
| Mod. | Dot. | Name | | | | | Sub. | |