


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LDC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
	K	REV PER ECO-12-000064	23JAN12	PY	DE		

DESCRIPTION	MATERIAL	FINISH
SHRINK TUBING	MIL-I-23053	
RETAINING CLIP	BeCu ASTM-B-194 OR STAINLESS STEEL PER QQ-S-766	
SOCKET CONTACT	BERYLIUM COPPER PER ASTM B196	GOLD PLATE MIL-G-45204
HOUSING	GLASS REINFORCED VALOX & EPOXY	
GROMMET	FLUROROSILICONE	

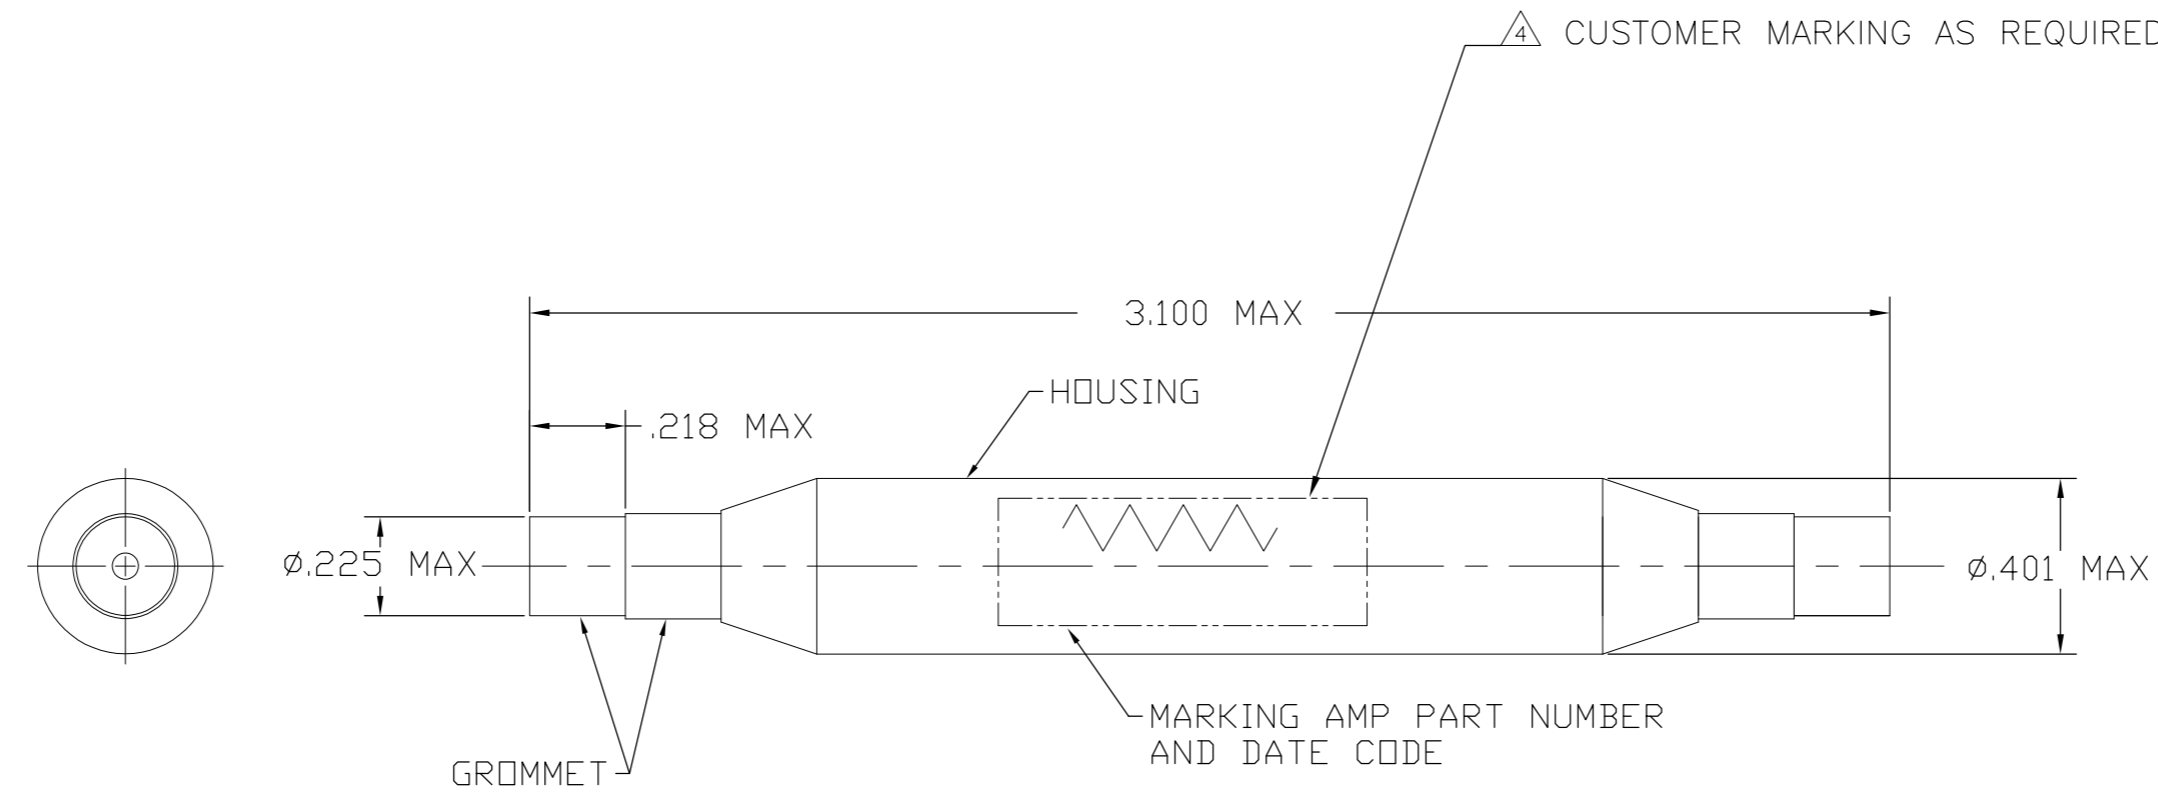

- ⚠ ENVIRONMENTS CREATED DURING OPERATION WHICH EXCEEDS THE WIRE SPLICE RATED PERFORMANCE IS THE RESPONSIBILITY OF THE USER. THE RESISTOR SPECIFICATIONS SHOULD BE CONSULTED.
- ⚠ PIN CONTACT, SEALING PLUGS & INSERTION/EXTRACTION TOOL TO BE ORDERED SEPARATELY.
- A) PIN CONTACT: 2-592404-1
- B) SEALING PLUG: 592104-1
- C) TOOL: 592105-1
- ⚠ THIS ASSEMBLY MEETS OR EXCEEDS THE GENERAL REQUIREMENTS OF MIL-T-81714.

COMMENTS	CUST MARKING	RESISTOR SPEC	% TOLERANCE	WATTS	OHMS	PART NO
		RLR20C2202GR	±2°	1/2	22K	1-591917-4
		RLR32C1000GR	±2°	1	100	1-591917-3
		RLR07C1001GR	±2°	1/4	1K	1-591917-2
OBSOLETE			±1°	1/2	100K	1-591917-1
OBSOLETE			±1°	1/2	10K	1-591917-0
OBSOLETE			±1°	1/4	2.2K	591917-9
OBSOLETE			±1°	1/4	127	591917-8
OBSOLETE		RLR32C1000GS	±2°	1	100	591917-7
OBSOLETE			±1°	1/2	100	591917-6
		RLR32C1201GM	±2°	1	1.2K	591917-5
		RC20GF681J	±5°	1/2	680	591917-4
		RNC60J1002FS	±1°	1/8	10K	591917-3
	12810-1	RN65C1270F	±1°	1/2	127	591917-2
		RN65C1270F	±1°	1/2	127	591917-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN T. THOMPSON 08NOV2001	TE Connectivity
0 PLC ± - 1 PLC ± - 2 PLC ± .01 3 PLC ± .005 4 PLC ± - ANGLES ± -	FINISH	CHK C. CHEHOVIN 03-10-96	
MATERIAL		APVD C. CHEHOVIN 03-10-96	NAME
		PRODUCT SPEC	WIRE SPLICE, SINGLE SIZE 20
		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO
		WEIGHT	A2 00779 C-591917
		CUSTOMER DRAWING	SCALE 1:1 SHEET 1 OF 1 REV K