




THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
GP	00	P	LTR	DESCRIPTION	DATE	DWN
			A	REVISED PER ECO-07-022535	10NOV07	JDP
						CWR

- 1 PHOSPHOR BRONZE, 0.20[.008] THICK.
- 2 0.00254[.000100] MIN TIN OVER 0.00127[.000050] MIN NICKEL.
- 3 APPLICATOR CUTOFF DIMENSION.

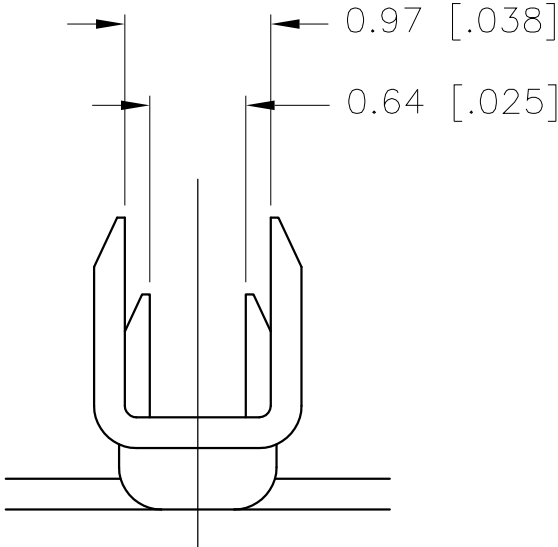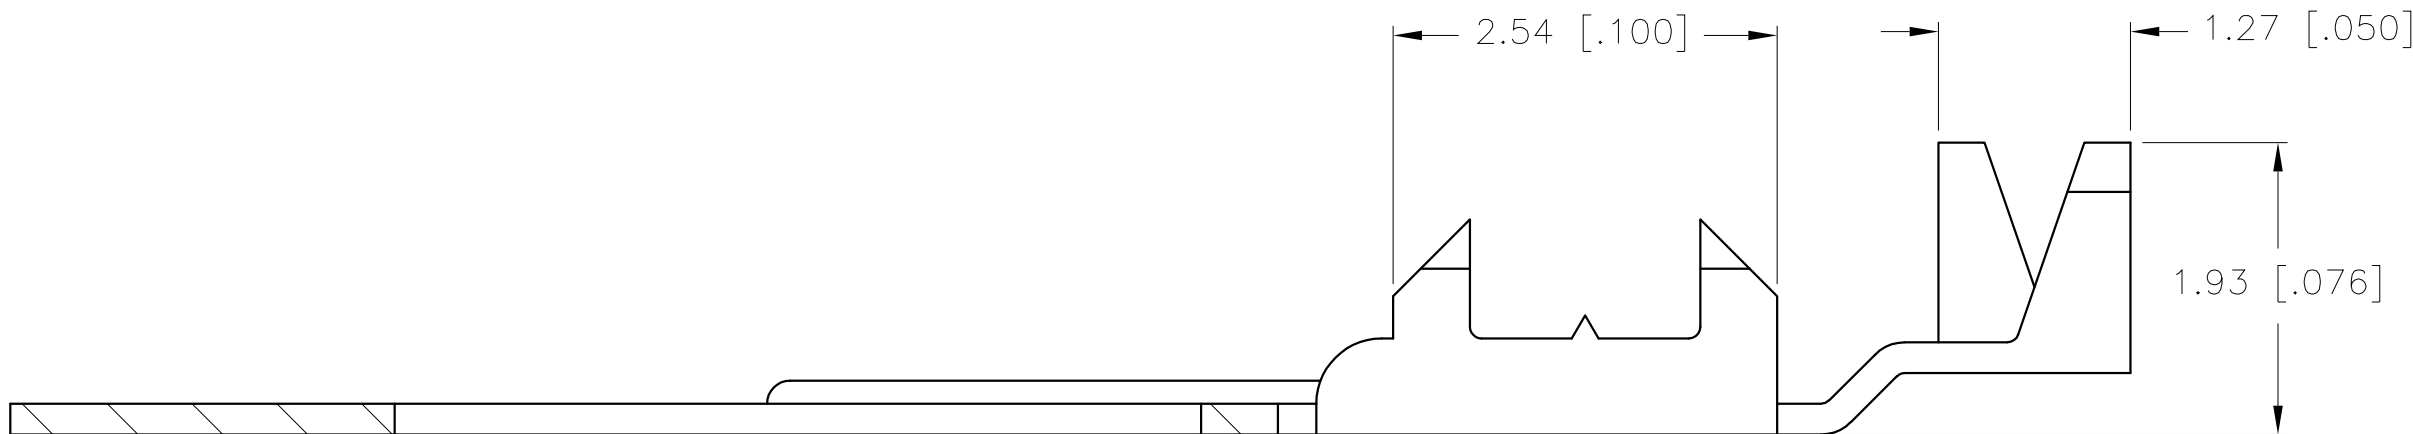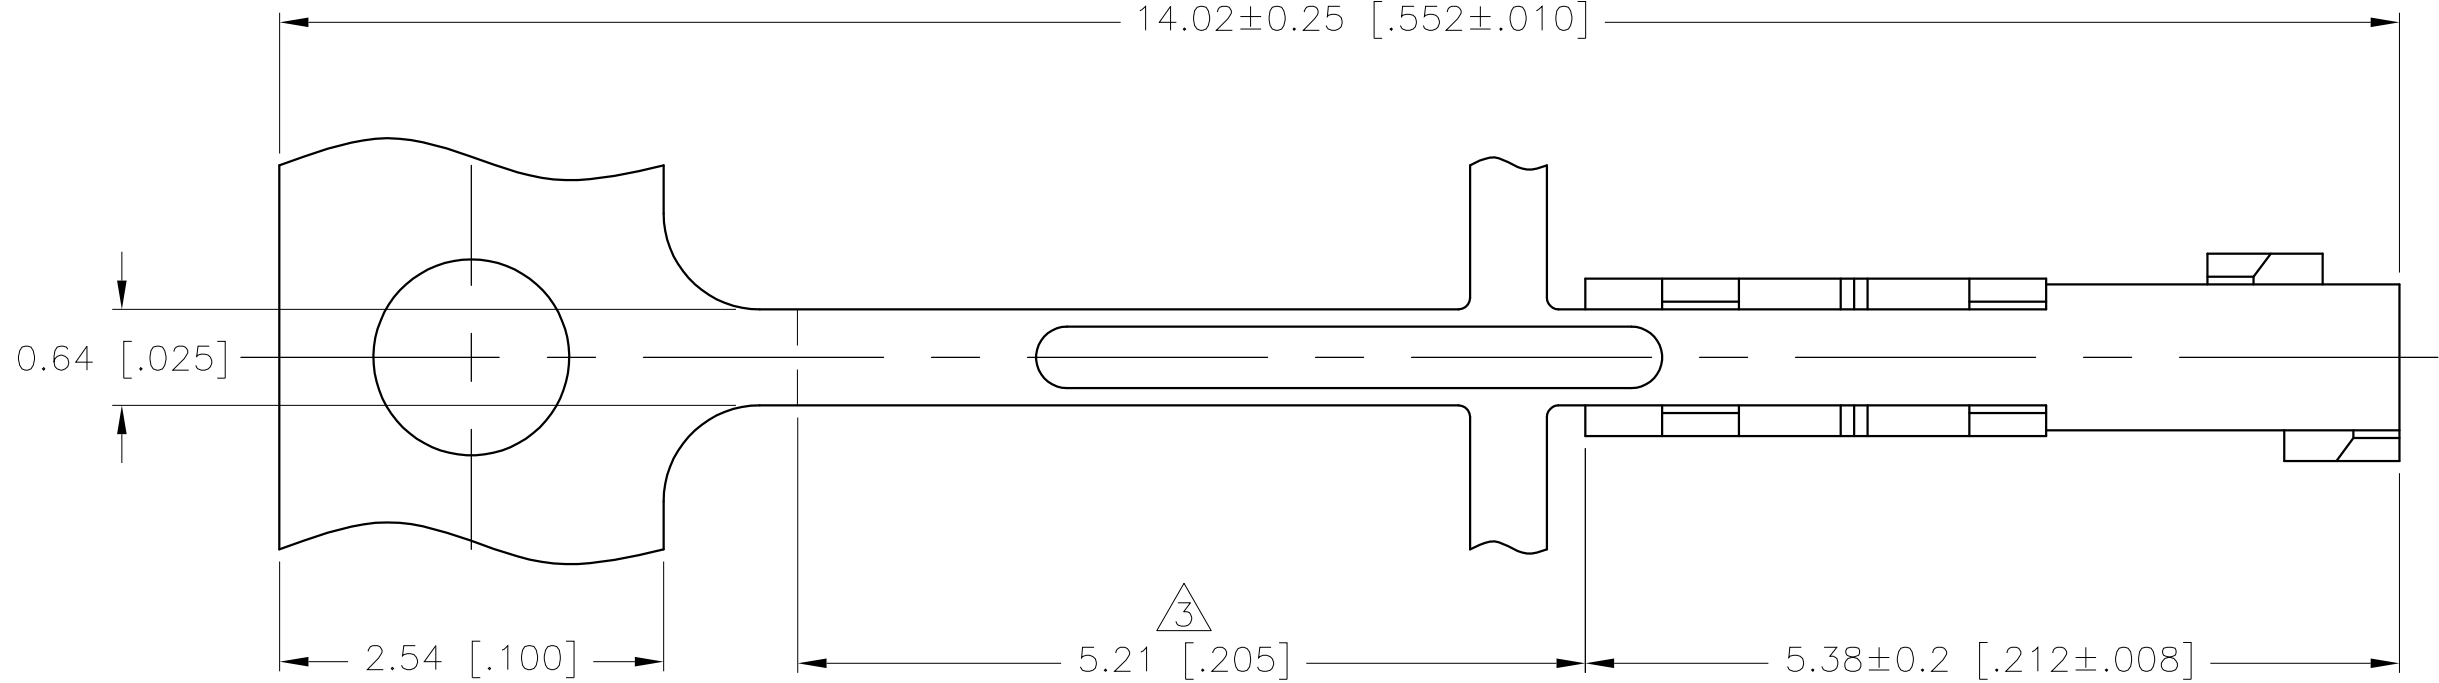

PHYSICAL PROPERTIES			
CONTACT RETENTION FORCE:	44 N		
INSERTION FORCE:	1.4 N PER CONTACT		
EXTRACTION FORCE:	1 N PER CONTACT		
ELECTRICAL PROPERTIES			
CURRENT RATING:	3 AMPS PER PIN		
ENVIRONMENTAL PROPERTIES			
TEMPERATURE RATING:	-40°C TO +105°C		

1658545-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J.GERACE	26AUG04	Tyco Electronics Corporation Harrisburg, PA 17105-3608			
		CHK	S.BOLASH	26AUG04				
		APVD	M.WALMSLEY	26AUG04	NAME			
		PRODUCT SPEC			CONTACT, SOLDER TAB, FLEXPAC®			
		APPLICATION SPEC			-			
		WEIGHT			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		-			A2	00779	C=1658545	-
		CUSTOMER DRAWING				SCALE	SHEET	REV
						20:1	1 OF 1	A