

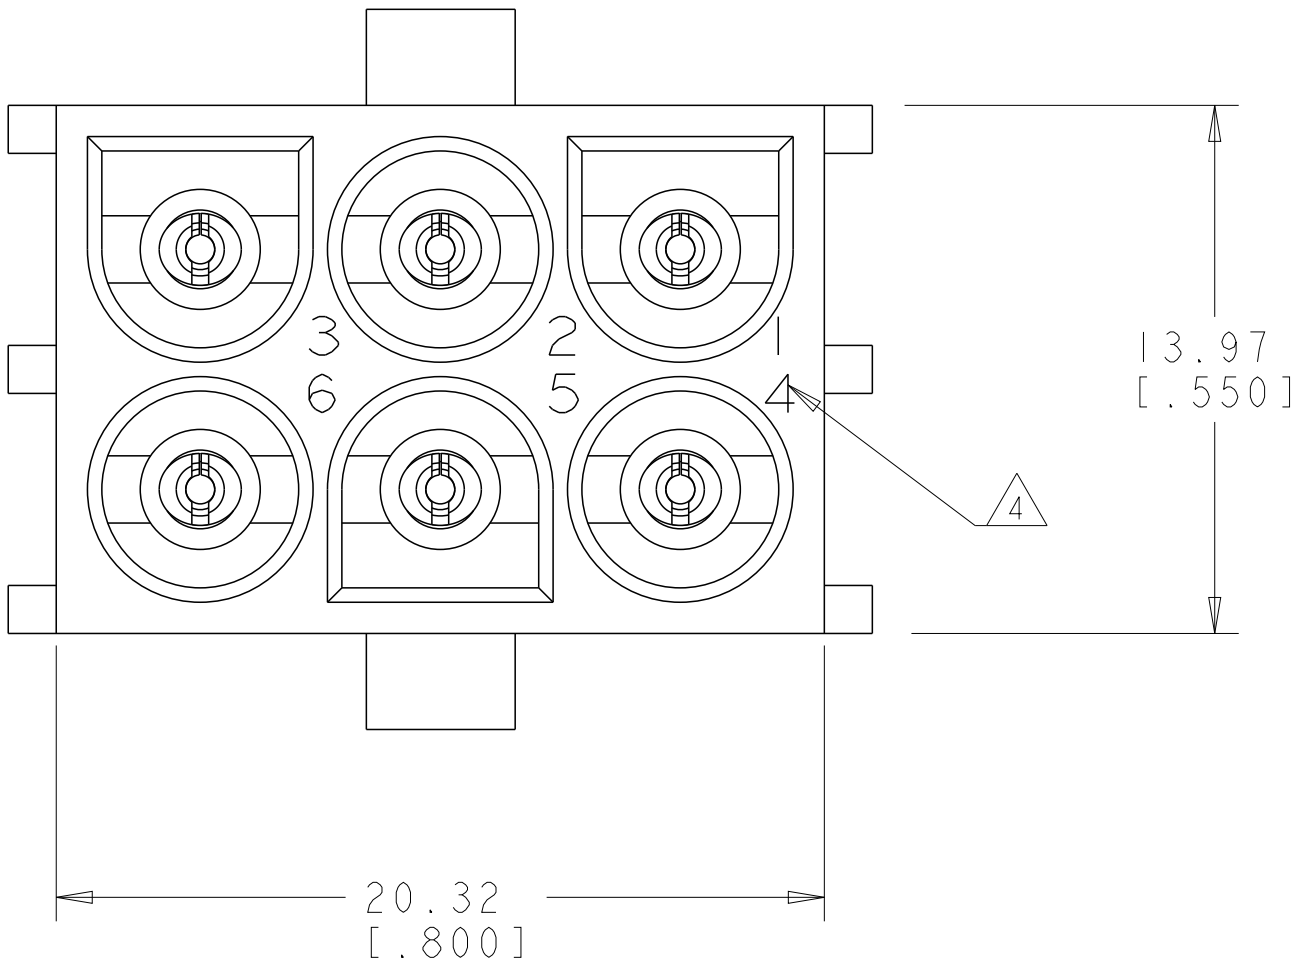
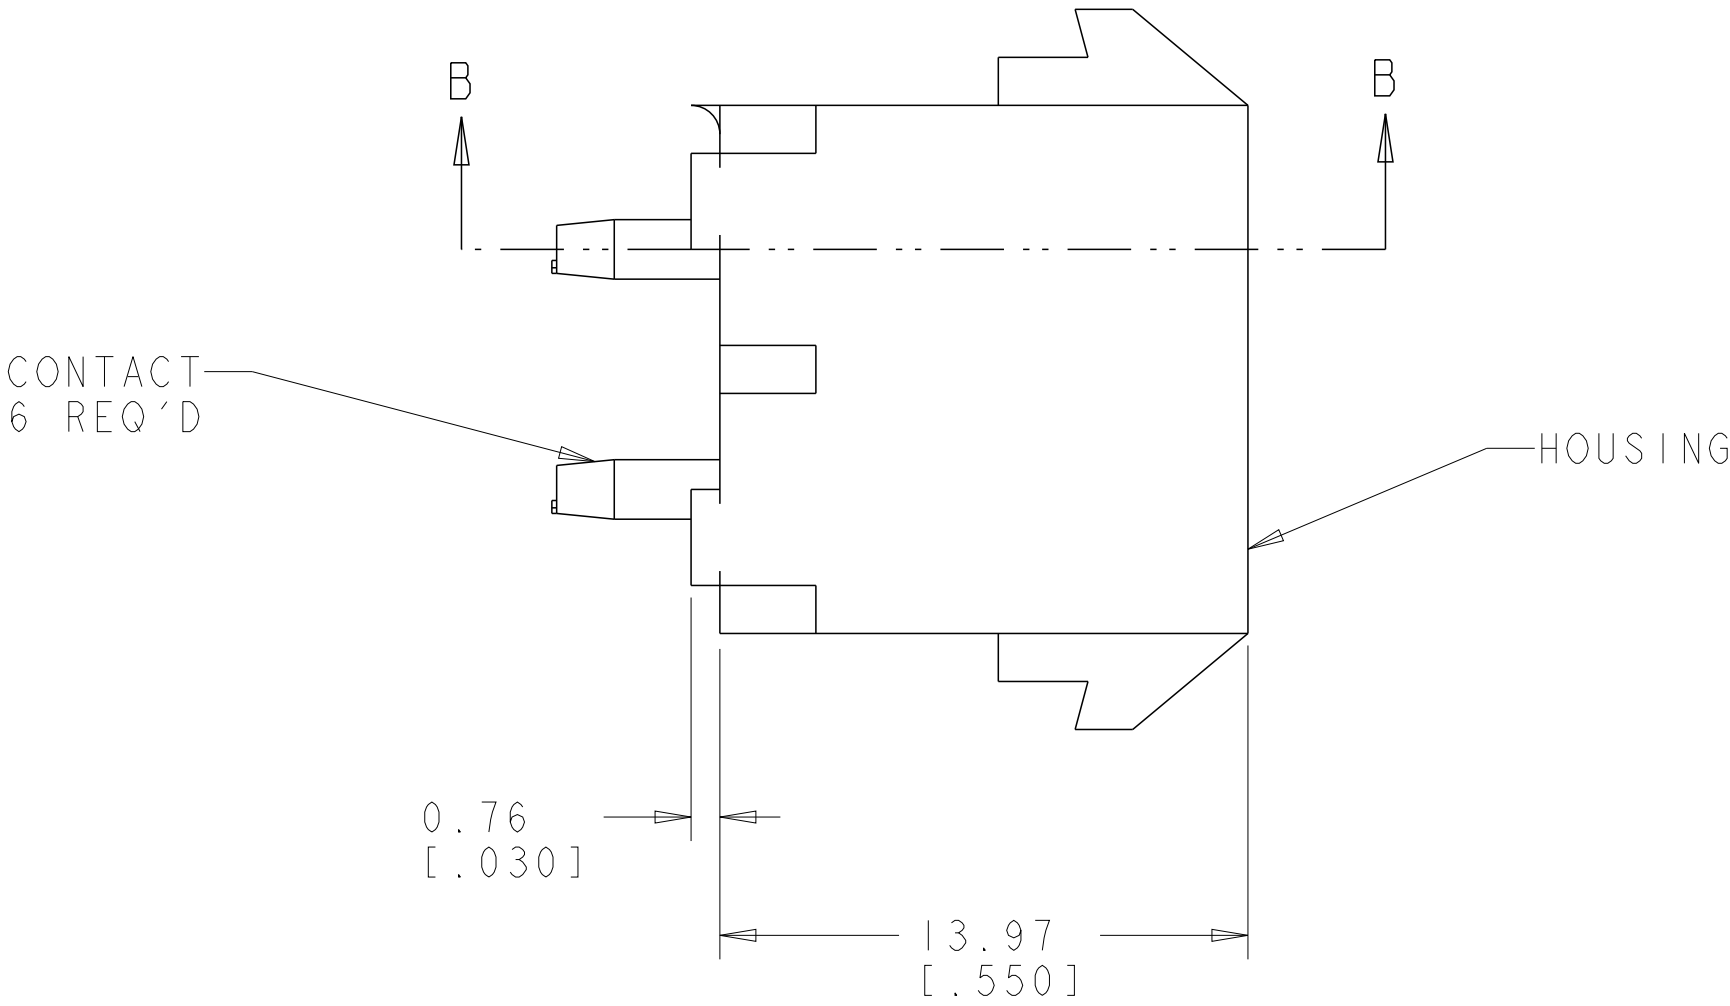
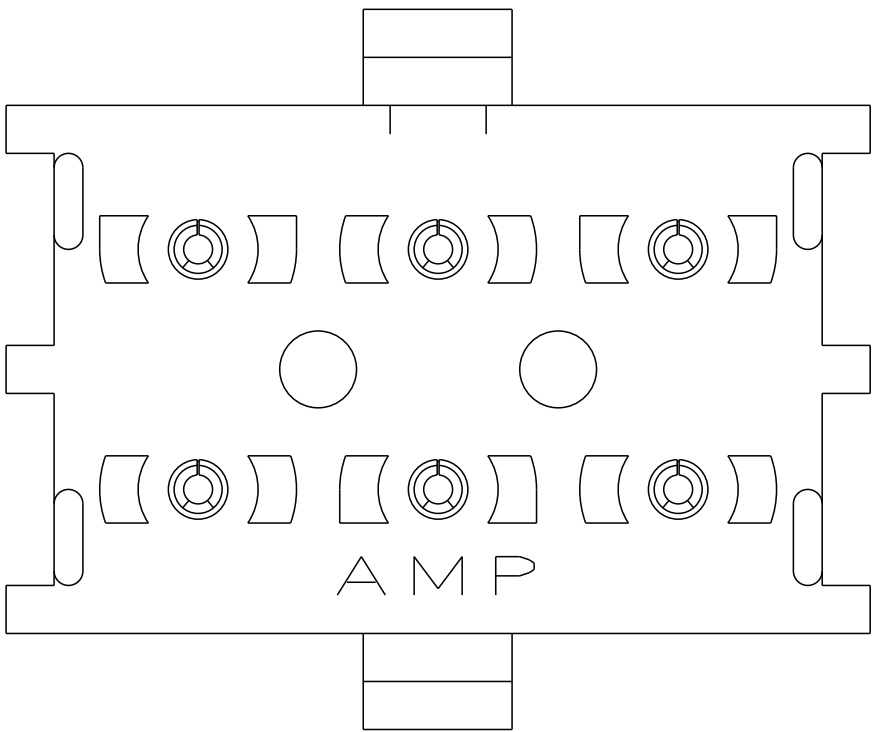



LOC		DIST		REVISIONS				
P	LYR	DESCRIPTION			DATE	DWN	APVD	
	Y2	REVISED PER ECR-12-011660			24JAN2013	KH	TM	

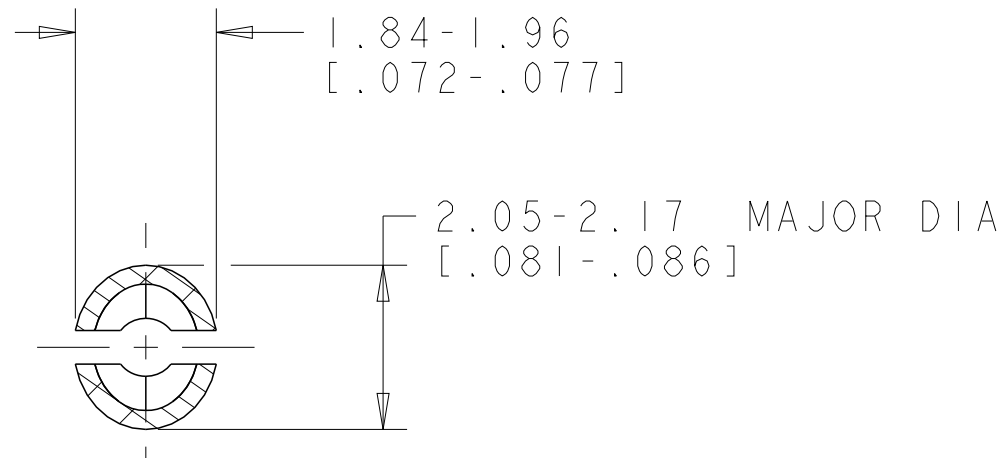


- PARTS MATE WITH HOUSING 480704.
 - PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
 - CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
 - CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND TIN LEAD ON SOLDER TAIL END.
 - CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.
 - DIMENSIONS IN BRACKETS ARE IN INCHES.
- △ SUPERSEDED BY 350431-4

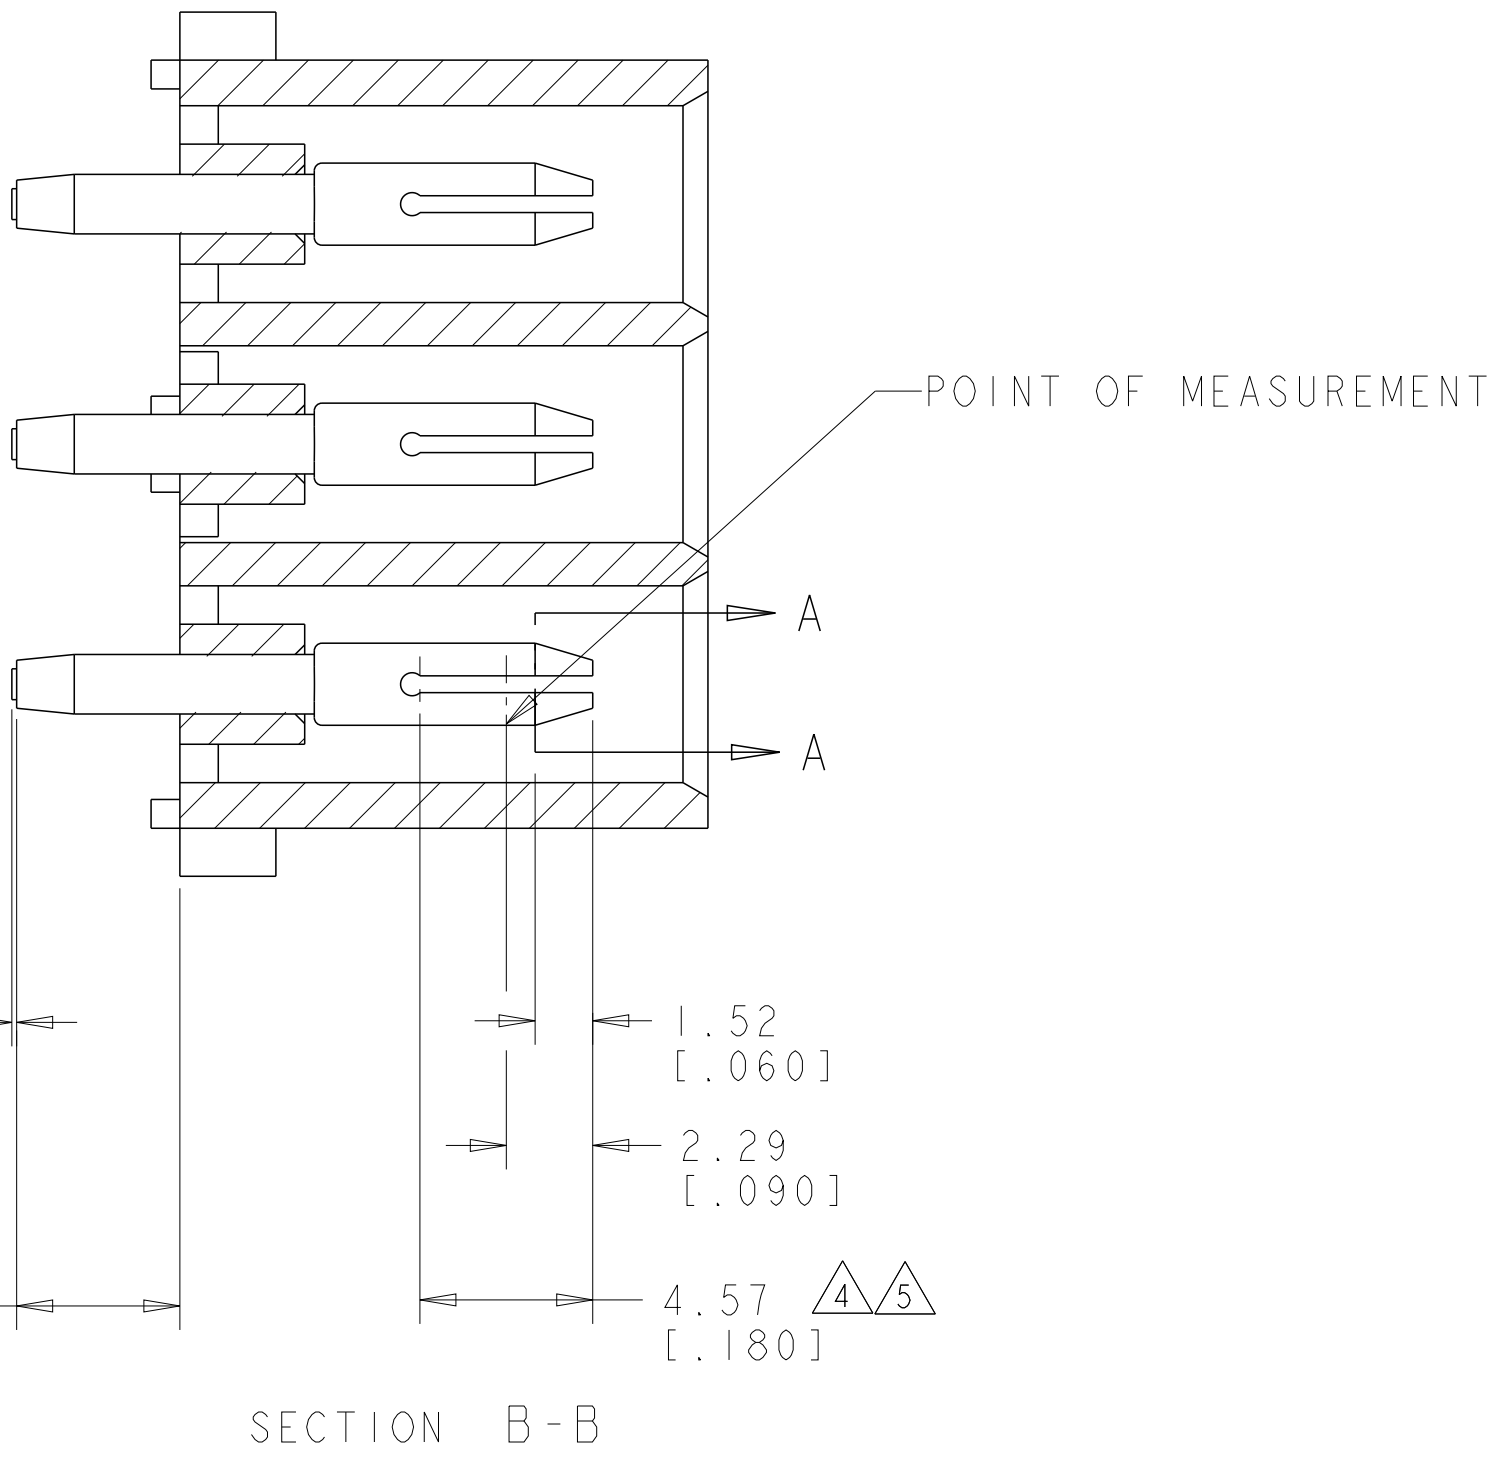

SECTION A-A
SCALE 10:1

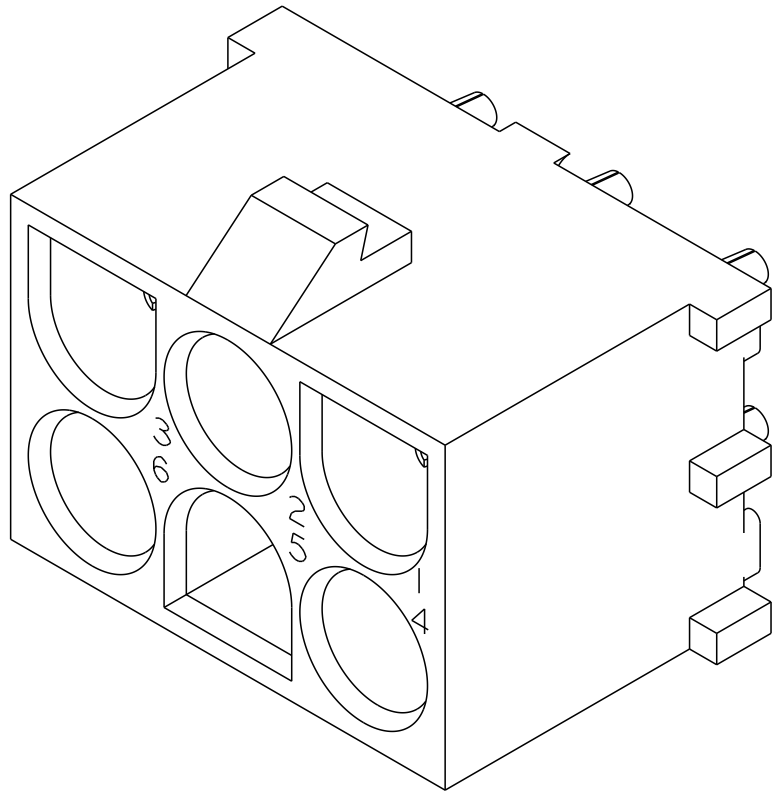


3 DIMENSIONAL MODEL
SCALE 4:1

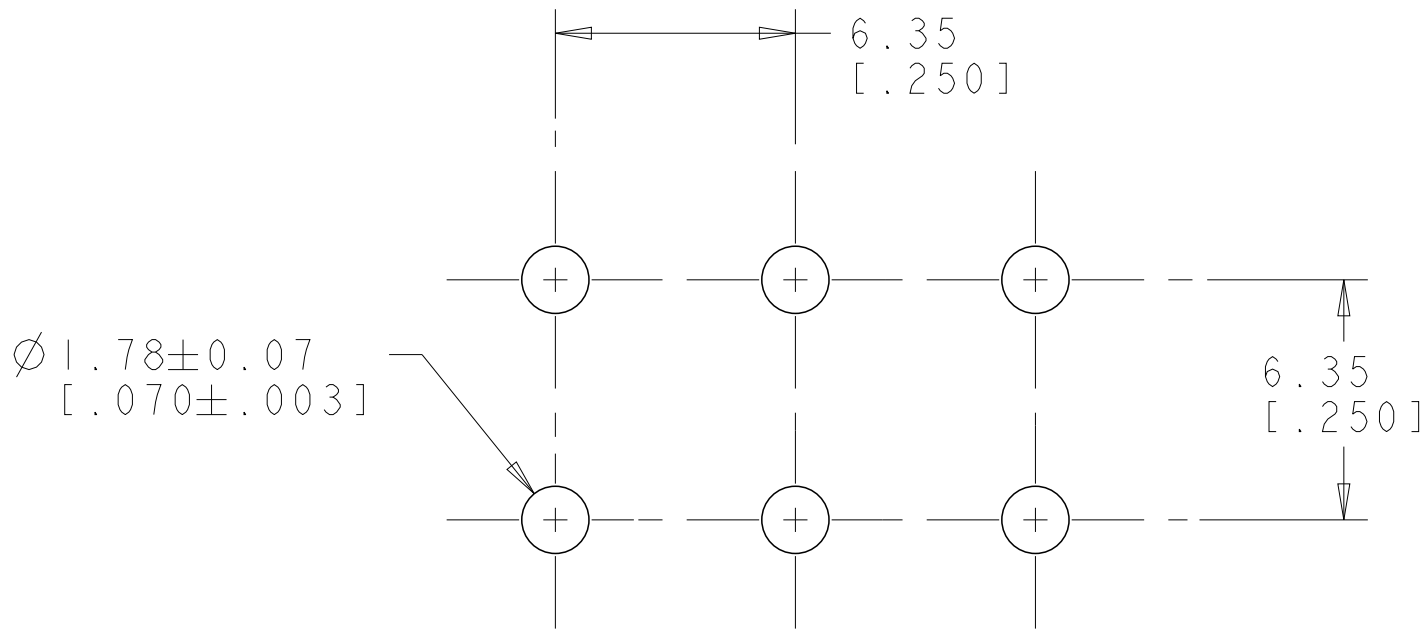

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [.062] THICK P.C. BOARD

PHOSPOR BRONZE, GOLD △5	NYLON, UL94V-2, NATURAL	350431-4
PHOSPOR BRONZE, GOLD △3	NYLON, UL94V-2, NATURAL	350431-2
PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-2, NATURAL	350431-1
PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL AND COLOR	PART NUMBER

△7



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 18JULY2005	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK S. RIDGILL 18JULY2005		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. RIDGILL 18JULY2005	NAME	
0 PLC ±		PRODUCT SPEC	PIN HEADER ASSEMBLY, 6 CIRCUIT, UNIVERSAL MATE-N-LOK TM	
1 PLC ±		APPLICATION SPEC		
2 PLC ±0.13 (.005)		WEIGHT	SIZE CAGE CODE DRAWING NO	
3 PLC ±		RESTRICTED TO	A100779C=350431	
4 PLC ±		CUSTOMER DRAWING	SCALE 5:1 SHEET 1 OF 1 REV Y2	
ANGLES ±0°30'				
FINISH				