



LOC J	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			E	REVISED PER ECR—11—008941	28JUL11	T.T	T.M


リール引出し方向
DIRECTION OFF TOP OF REEL

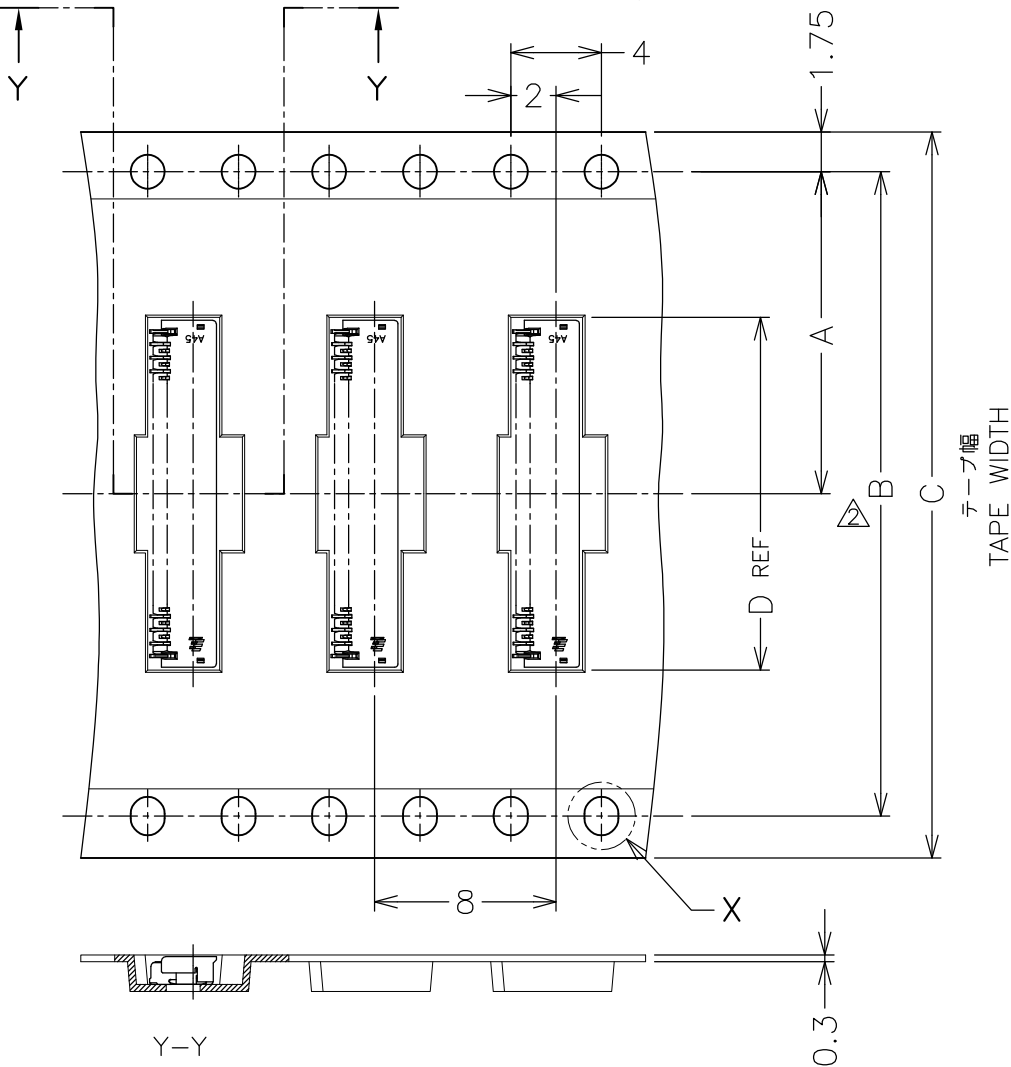


VIEW W
テープ幅 32mm以上に適用
APPLIED TAPE WIDTH 32MM,MORE.

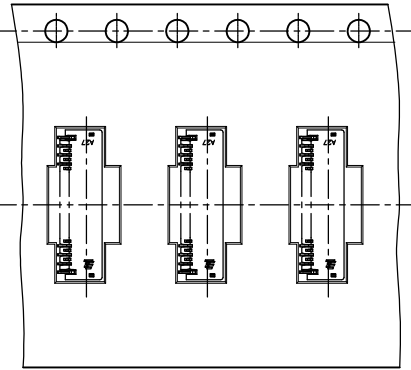

VIEW W
テープ幅 12mm, 16mm, 24mm に適用
APPLIED TAPE WIDTH 12MM, 16MM AND 24MM.



DETAIL X

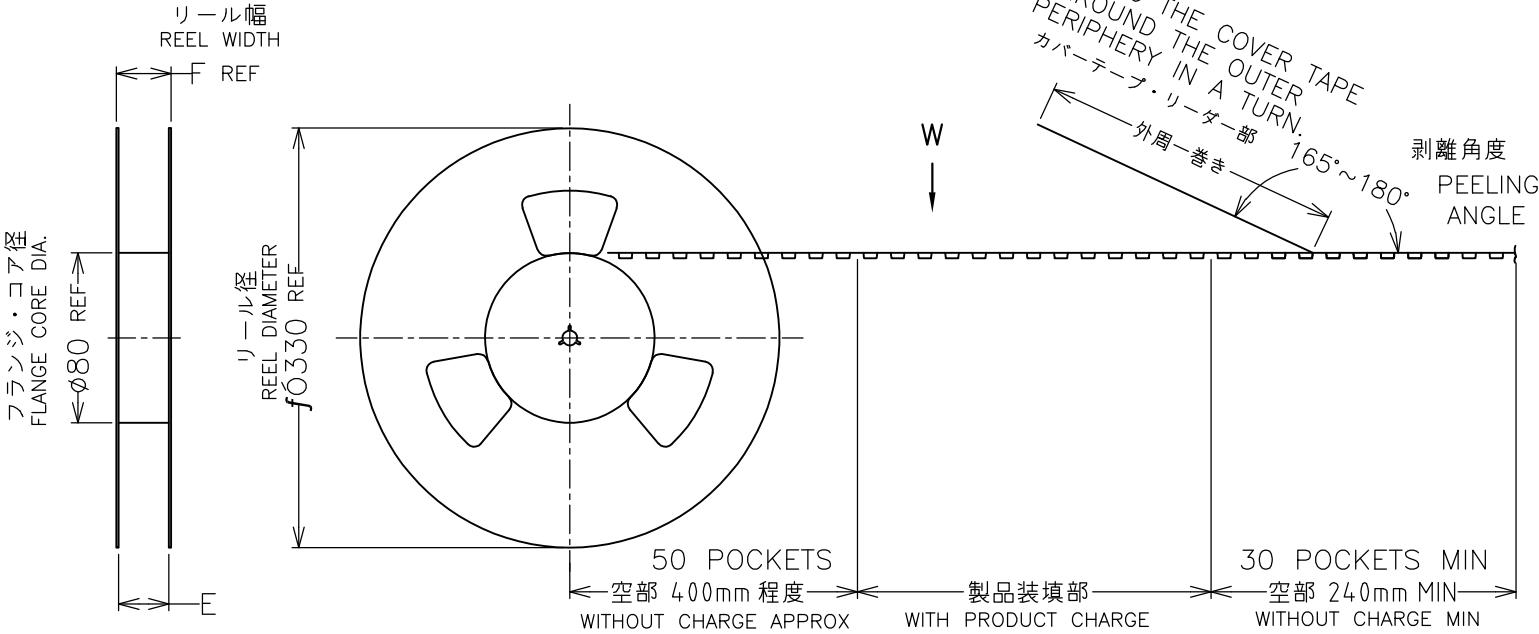

WINDING THE COVER TAPE
AROUND THE OUTER
PERIPHERY IN A TURN.
カバーテープ・リターナ部
外周巻き
165°~180°
剥離角度
PEELING
ANGLE

- ① GENERAL TOLERANCE

10 ≥ : ±0.2
30 ≥ > 10: ±0.25
100 ≥ > 30: ±0.3
ANGLES: ±3°

② DIM. B AND DETAIL "X" APPLIED
TAPE WIDE, 32mm MORE.
- ① 一般公差

10以下 : ±0.2
10を越え 30以下 : ±0.25
30を越え 100以下 : ±0.3
角 度 : ±3°

② B寸法及び "X" 詳細図は、
テープ幅 32mm以上に適用

OBSOLETE	AVAILABLE	0.102g	30.4	24.4	17.35	24	—	11.5	4000	51	2-2013496-1
	AVAILABLE	0.090g	30.4	24.4	15.55	24	—	11.5	4000	45	1-2013496-8
	AVAILABLE	0.083g	30.4	24.4	14.35	24	—	11.5	4000	41	1-2013496-6
	AVAILABLE	0.080g	30.4	24.4	13.75	24	—	11.5	4000	39	1-2013496-5
	AVAILABLE	0.066g	30.4	24.4	11.35	24	—	11.5	4000	31	1-2013496-1
	AVAILABLE	0.062g	30.4	24.4	10.75	24	—	11.5	4000	29	1-2013496-0
	AVAILABLE	0.059g	30.4	24.4	10.15	24	—	11.5	4000	27	2013496-9
OBSOLETE	AVAILABLE	0.048g	22.4	16.4	8.35	16	—	7.5	4000	21	2013496-6
	STATUS	CONNECTOR WEIGHT	F	E	D	C	B	A	数量 (ヶ) QTY/REEL	POS.(N)	EMBOSS TAPE PACKAGING PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± 0.3
1 PLC ± 0.3
2 PLC ± 0.3
3 PLC ± 0.3
4 PLC ± 0.3
ANGLES ± 3°

FINISH
SEE NOTE 4

MATERIAL
SEE NOTE 3

FINISH
SEE NOTE 4

DWN Y.KODAIRA 29NOV2007
CHK T.KUSUHARA 29NOV2007
APVD T.KUSUHARA 29NOV2007
PRODUCT SPEC
108-78351
APPLICATION SPEC
411-78302
WEIGHT SEE TABLE

TE Connectivity

0.3FPC Narrow BF-L-1.2H
1.2mmH, 2.9mmW, GOLD PLATE

SIZE CAGE CODE DRAWING NO RESTRICTED TO
A300779 C-2013496

SCALE 10:1 SHEET 1 OF 2 REV E

