



TOP VIEW

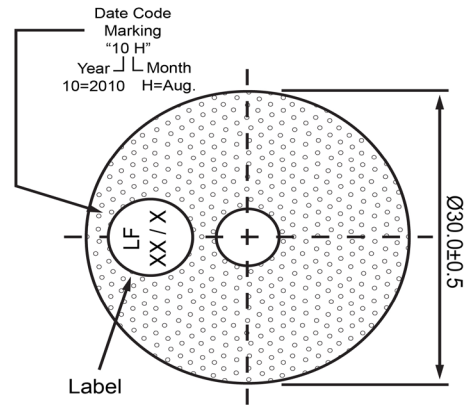

SIDE VIEW

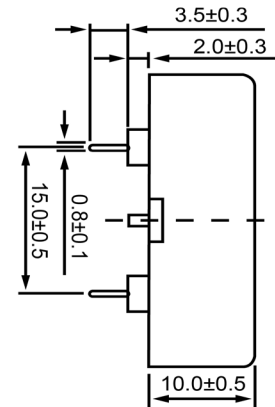

Specifications			Notes	Revision History							
Description	Value	Unit		Version	Description		Date	Approved			
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S			
Resonant Frequency	2,500	(Hz)									
Rated Voltage	3	(V)									
SPL @ 10cm	90	(dBA)									
Capacitance	25,000	(pF)									
Mount Type	Thru Hole										
Voltage Range	1 ~ 30	(V)									
Max Rated Current	3	(mA)									
Housing Material	PBT										
Operating Temperature	-20 ~ +70	°C									
Storage Temperature	-20 ~ +70	°C									
Weight	6	(g)									
 DB UNLIMITED			Piezo Transducer			TP302505-1					
			Drawn by		Date		Checked by		Date		Approved by
A.B.		10/21/2013		C.E.		10/21/2013		J.S		10/21/2013	