


1. OPERATING CHARACTERISTICS

ITEM	SPECIFICATION
OPERATING FORCE	0.47N MAX.
RELEASING FORCE	49mN MIN.
PRETRAVEL *	6 mm MAX.
MOVEMENT DIFFERENTIAL	0.8mm MAX.
OVERTRAVEL	3.2mm MIN.
OPERATING POSITION	19±0.8mm
FREE POSITION	24.2mm MAX.

*REFERENCE VALUE

2. RATINGS (UL/CSA)

15A 125.250 or 480VAC
 1/2A 125VDC. 1/4A 250VDC
 1/8HP 125VAC. 1/4HP 250VAC

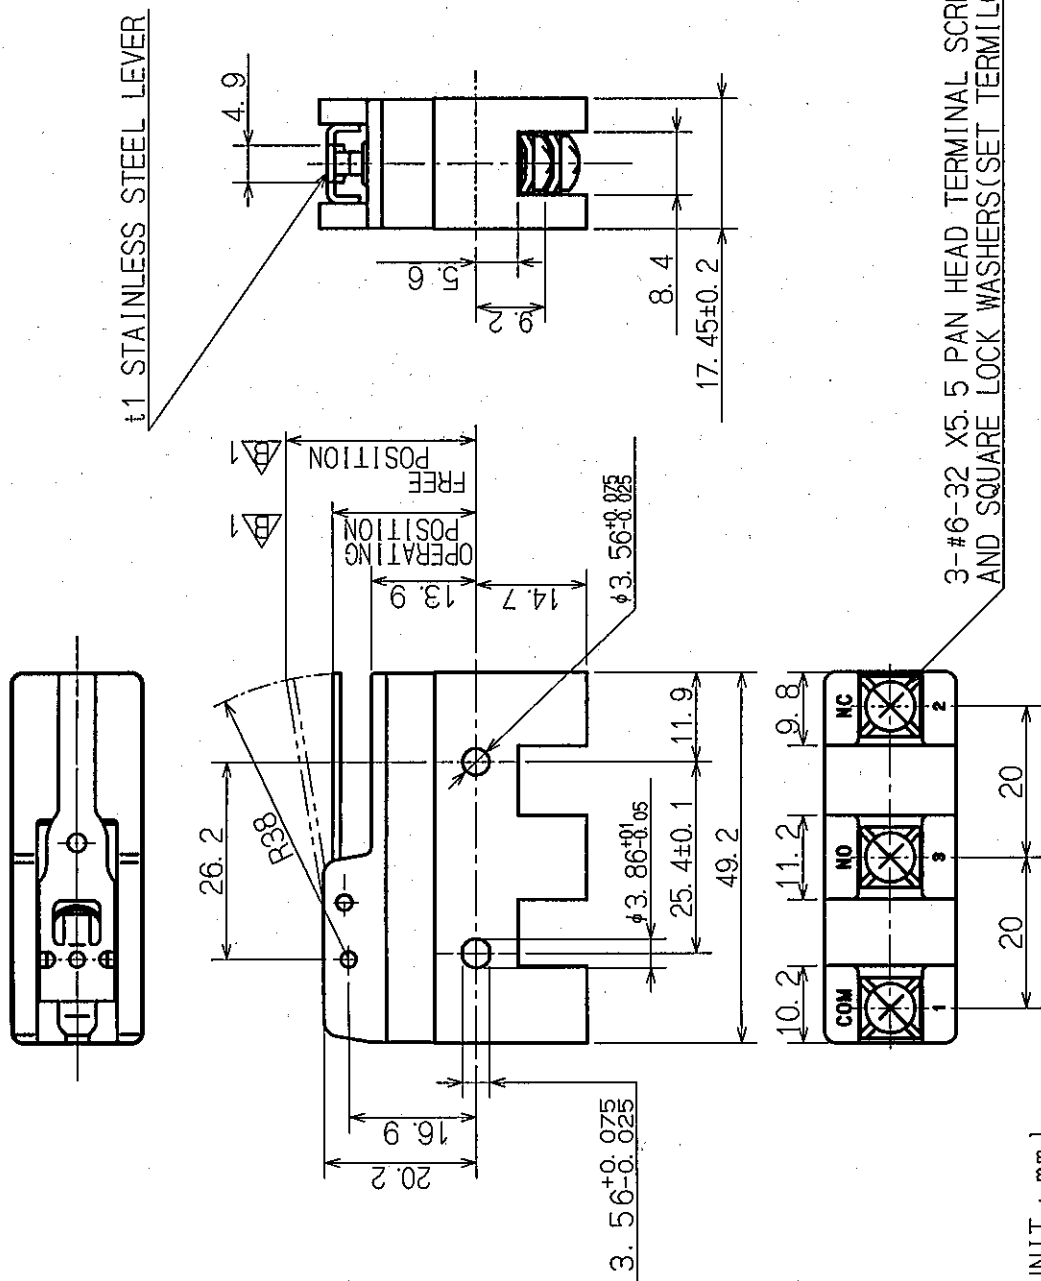

(UNIT : mm)

SCALE 1:1		3RD ANGLE		SHEET 1/1	
BASIC SWITCH OUTLINE DRAWING					
DRWG NO.		6475136-5 B1			
DESIGNED FOR		Z-15GW544-B2-K			

MATERIAL		FINISH		TOLERANCES UNLESS SPECIFIED		DESIGNED		CHECKED		APPROVED	
				±0.4		Oct. 27. '08		Oct. 27. '08		Oct. 27. '08	
						S. Iwata		S. Fukui		S. Fukui	

B1	Oct. 27. '08	CORRECTION	#M3080687	Y. Naito			
B	Feb. 7. '08	CHANGE OF LEVER	#M3080090	I. Ozoe			
A1	Mar. 1. '99	CHANGE OF SPEC.	#M3990217	S. Iwata			
SYM	DATE	E/C CONTENTS	E/C NO.	SIGN			