


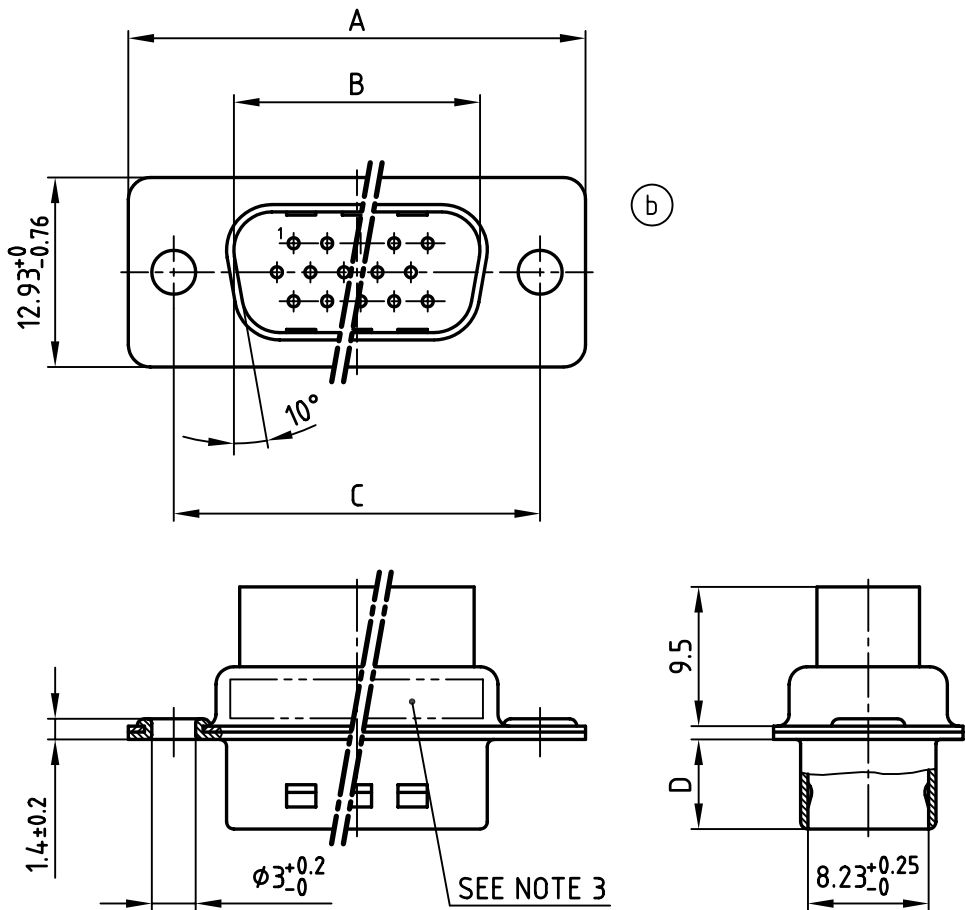

POS.	A -0.76	B $+0.25$	C	D -0.3	Part-NÖ.
15	31.19	16.79	25.00 $+0.12/-0.13$	6.12	163X10169X (303A505000X)
26	39.52	25.12	33.30 $+0.15/-0.1$	6.12	163X10179X
44	53.42	38.84	47.04 ± 0.13	5.99	163X10189X
62	69.70	55.30	63.50 ± 0.13	5.99	163X10199X

- b

NOTES:
1. METALSHELLS: STEEL; min. 315µin TIN over 40-80pin Nickel
2. INSULATORS: PA 6.6 UL 94 V-0, BLACK
3. CONNECTOR IS PART MARKED: PART-NÖ. CONEC ABC

Directive 2002/95/EC

„RoHS“

Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.

OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

2 x b

Ä 2574

14.09.06

HS

rev.

description

date

name

2001

date

name

drawn

12.03.

Parei

appd.

12.03.

E. Mickenbecker

norm

d-old

tolerance

scale: 2:1

material: SEE NOTES

title:

D-SUB HD MALE
CRIMP-VERSION 15-62pos.

dwg no:

AutoCAD 2000

DIN-A 4

part no:

SEE TABLE

16K1A154A

sh: 1/1

CONEC®