

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS






P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	INITIAL	18SEP2017	YC	CW
	B1	ECR-18-000057	03JAN2018	YC	CW

NOTES:

- I. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 1000V
RATED CURRENT: 200A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 8KV
POLLUTION DEGREE: 3
CONTACT RESISTANCE: $\leq 0.5m\Omega$
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 25mm²~70mm²
CONTACT TYPE: CRIMP TYPE.

注释:

- I. 技术参数:
绝缘材料: PC
额定电压: 1000V
额定电流: 200A
绝缘电阻: $\geq 400M\Omega$
脉冲电压: 8KV
污染等级: 3
接触电阻: $\leq 0.5m\Omega$
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 20mm²~70mm²
接线类型: 压接

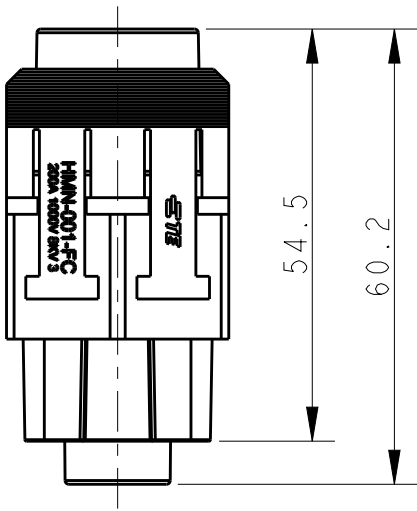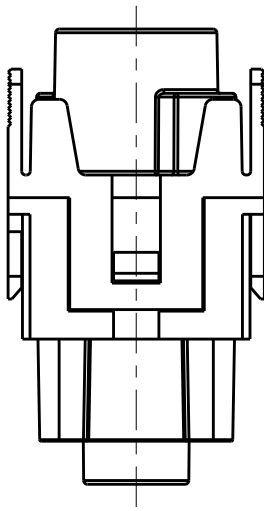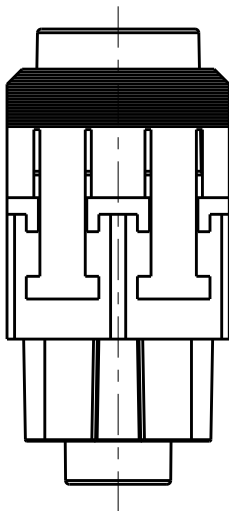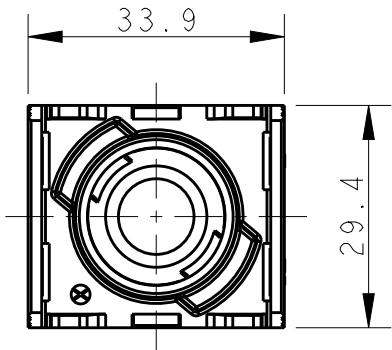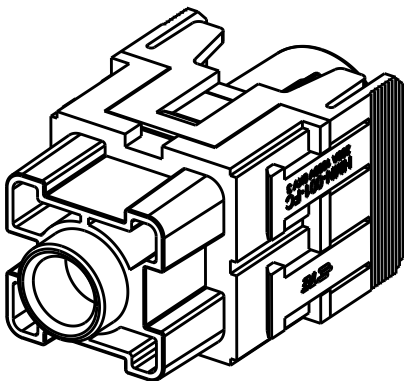

T2111013201-007

HMN-001-FC

HMN-001 FEMALE MODULE INSERT, CRIMP
HMN-001 冷压模块母插

PART NUMBER

料号

PART DESCRIPTION

描述

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 18SEP2017

YORK CHEN

CHK 18SEP2017

GINO YAO

APVD 18SEP2017

CHRIS WANG

PRODUCT SPEC

108-137057

APPLICATION SPEC

114-137057

WEIGHT

-

CUSTOMER DRAWING



TE Connectivity

NAME
HMN-001-FC

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

©-T2111013201007

-

SCALE

1:1

SHEET

1


OF

1

REV

B1

DIMENSIONS:
mm



TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL

-

FINISH

-