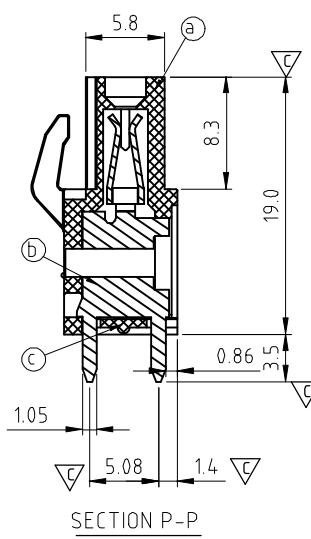
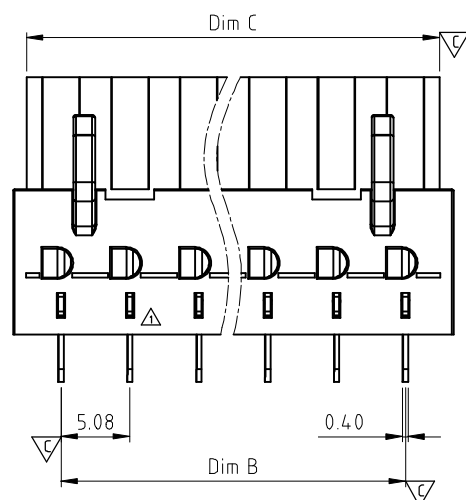

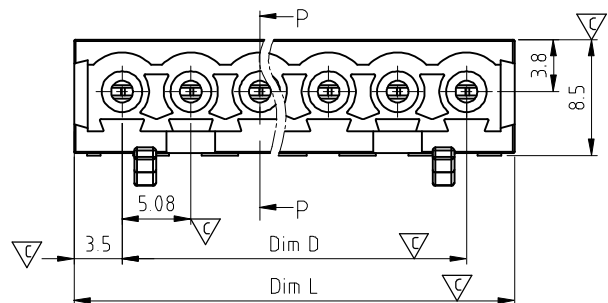


| DIM   |                 | TOL           |        |               |         |
|-------|-----------------|---------------|--------|---------------|---------|
|       |                 | 2P-6P         | 7P-12P | 13P-18P       | 19P-24P |
| Dim L | (N-1)×5.08+7.08 | ±0.15         | ±0.25  | ±0.30         | ±0.40   |
| Dim B | (N-1)×5.08      | ±0.15         | ±0.25  | ±0.30         | ±0.40   |
| Dim C | N×5.08          | +0.0<br>-0.20 |        | +0.0<br>-0.40 |         |
| Dim D | (N-1)×5.08      | ±0.15         | ±0.25  | ±0.30         | ±0.40   |

| SIGN | DATE       | DESCRIPTION                                   | APPROVER |
|------|------------|-----------------------------------------------|----------|
| △    | 04.20'09   | The design is changed                         | Jacke    |
| △    | 04.20'09   | The operating temperature is changed          | Jacke    |
| △    | 2010.01.12 | Add cULus standard                            | Jacke    |
| △    | 2010.03.31 | Add the 2p mark                               | Jacke    |
| △    | 2010.04.26 | The current rating is changed from 10A to 20A | Jacke    |
| △    | 2014.09.12 | The current rating is changed from 20A to 10A | Evan     |

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

## Materials

Item① Terminal body:Thermoplastic (UL94V-0)

Item② Female contact:PhBz Tin plated

Item③ Terminal cover:Thermoplastic (UL94V-0)

## Electrical cULus

● Voltage rating: 300VAC

● Current rating: 10A

● Withstanding Voltage: 1.6kv

△ ● Operating temperature: -40°C to +115°C

● Soldering temperature: 260°C±5°C/5 Sec

△ ● Safety Approval: cULus

● Critical dimension:▽

V7 xx 5 1 x 0 xxxx G

No. OF POLES

02 2 ploe

03 3 ploe

... ..

24 24 ploe

Color

0 Black (RAL9005)

2 Red (RAL3001/D)

3 Orange(RAL2011/P)

4 Yellow(RAL1018/A)

5 Green(RAL6018/T)

6 Blue (RAL5015/A)

8 Grey(RAL7035/D)

9 White(RAL1102)

C Green(RAL6018/U)

G RoHS compliant  
(lead<4%)

In copper Alloy

0000: "@" Logo (Standard)

000A: "ANYTEK" Mark

Any special item by  
customer request.  
please contact sales  
department.

# ANYTEK

## INSPECTION COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

|          |               |                         |                  |              |           |
|----------|---------------|-------------------------|------------------|--------------|-----------|
| TITLE    |               | V7 5.08 Series Vertical |                  |              |           |
| PART NO. | V7xx51x0xxxxG |                         |                  | DWG NO.      | 8V70301   |
| APPROVED | CHECKED       | DESIGNED                | DRAWN            | CUST NO.     |           |
|          |               | Evan<br>09/12`14        | Evan<br>09/12`14 | Tolerance    |           |
|          |               |                         |                  | UNIT: mm     | X. ±0.5   |
|          |               |                         |                  | SCALE: NONE  | X.X ±0.3  |
|          |               |                         |                  | SHEET: 01/01 | X.XX ±0.1 |
|          |               |                         |                  | REV.: G      | X° ±1°    |