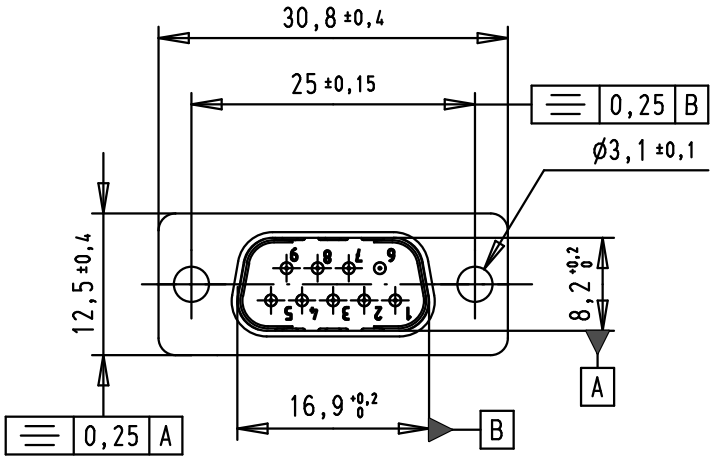



Solder bucket for AWG 20

SPECIFICATION

Performance level	PL2
Filter Type	C
Capacitance:	47pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

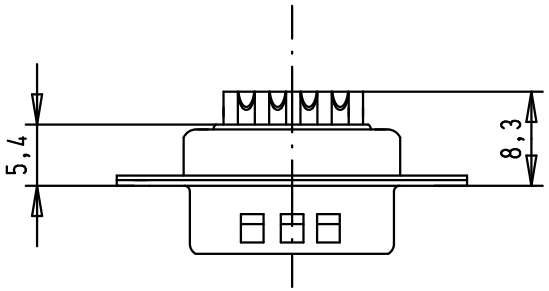

Mod.	Dat.	Name
36283	12/01/12	SD
31897	17/05/04	AF
31058	8-JUL-02	CV

	Dat.	Name
Detail.	8-JUL-02	CV
Insp.	12/01/12	JB
Stand.		

All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris

D-Sub, male, straight, 9 Poles, with turned solder bucket and hole

Ma?Mstab/ Scale: 1.5:1

TB 09641217210

Sub.

Blatt/ Page 1/1