

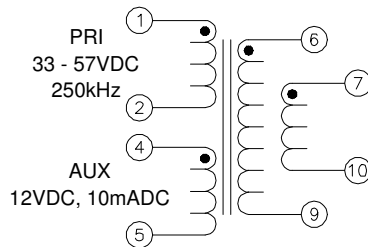


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

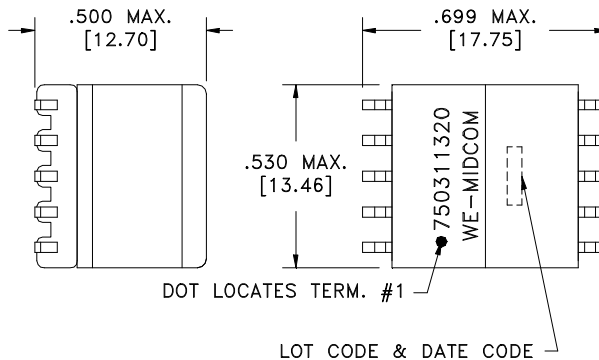


TERM. NO.'s FOR REF. ONLY



Customer to tie terminals 6+7 and 9+10 internally on PC Board.

AREA REPRESENTS
TERMINAL PAD DIMENSIONS

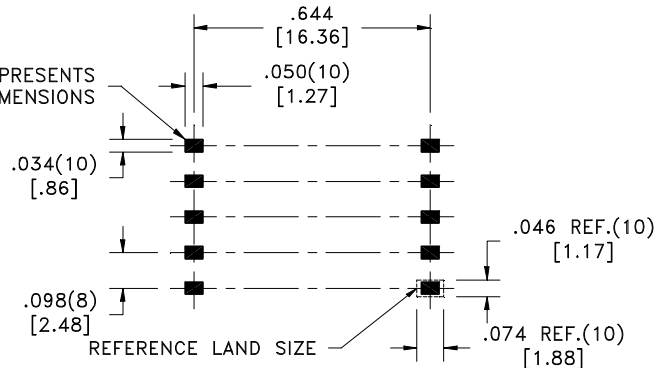

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (@20°C):	1-2 , 0.210 Ohms max. 4-5 , 0.580 Ohms max. 6-9 , 0.070 Ohms max. 7-10 , 0.070 Ohms max.
DIELECTRIC RATING:	1500VAC for 1 second between pins 1-6(tie 2+4, 6+7).
INDUCTANCE:	100μH ±10%, 100kHz, 240mVAC, 0mADC, 1-2, Ls. 80μH min., 100kHz, 240mVAC, 1.3ADC, 1-2, Ls.
LEAKAGE INDUCTANCE:	875nH max., 100kHz, 240mVAC, 1-2(tie 6+7+9+10), Ls.
URNS RATIO:	(1-2):(4-5), (1.8):(1.00), ±2%. (1-2):(6-9), (1.8):(1.00), ±2%. (1-2):(7-10), (1.8):(1.00), ±2%.

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

WE-Midcom, Inc. Watertown, SD USA Toll Free: 800-643-2661 Fax: 605-886-4486	Unless otherwise specified, tolerances are as follows: Angles: ±1° Fractions: ±1/64 Decimals: ±.005(.127mm)		WE-Midcom, Inc.	
	Drawing Title Transformer		Drawing Number 750311320	Rev. 00
This drawing is dual dimensioned. Dimensions in brackets are in millimeters		Revisions: See Sheet 1		Scale ----
Engineer:EJK		Sheet 2 of 5 08/24/2009		