


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect






Midcom

TERM. NO.'s FOR REF. ONLY




* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

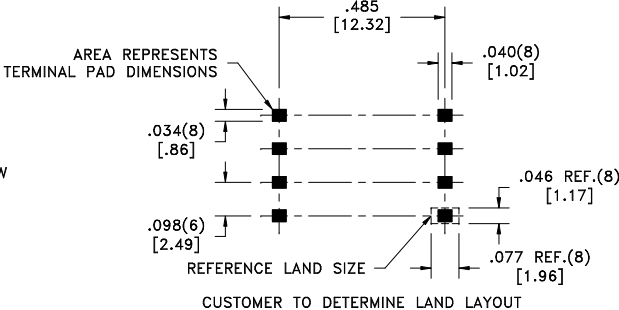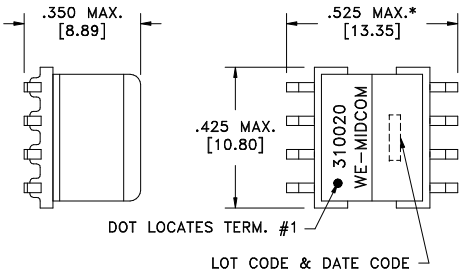

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	0.215 ohms max.
D.C. RESISTANCE	3-4 @20°C	1.750 ohms max.
D.C. RESISTANCE	5-7 @20°C, tie(5+6, 7+8)	0.035 ohms max.
INDUCTANCE	3-4 10kHz, 100mVAC, Ls	500uH ±10%
LEAKAGE INDUCTANCE	3-4 tie(1+2, 5+6+7+8), 100kHz, 100mVAC, Ls	7.5uH max.
DIELECTRIC	1-8 tie(2+3, 5+6), 1500VAC, 1 second	-
DIELECTRIC	1-3 500VDC, 1 second	-
URNS RATIO	(3-4):(5-7), tie(5+6, 7+8)	8:1, ±2%
URNS RATIO	(3-4):(2-1)	4.807:1, ±2%

REV.	DATE	Packaging Specifications	 CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13]	DRAWING TITLE	PART NO.
		Method: Tape & Reel PKG-0523 www.midcom-inc.com		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	TRANSFORMER	750310020
6A	5/07	SEE REVISION SHEET FOR REVISION LEVEL			eiSos p/n: 750310020	SPECIFICATION SHEET 1 OF 1

