



DESCRIPTION: M12 FEMALE - CABLE MOUNT - SOLDER CUP - 4 POS. - HIGH VIBRATION

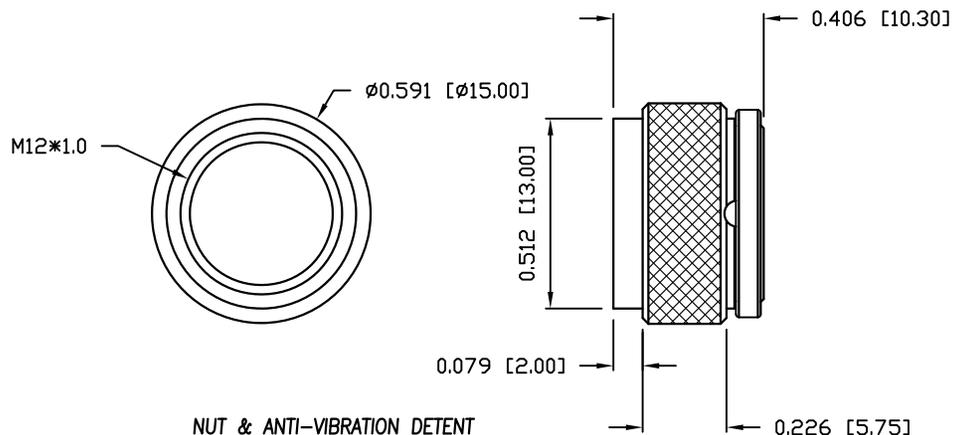


NUT & ANTI-VIBRATION DETENT

NOTE:

MATERIAL
 HOUSING: PA66 UL94V-0, BLACK
 CONTACT: BRASS
 NUT: BRASS
 O-RING: EPDM, BLACK
 FINISH
 CONTACT: 10 μ GOLD
 OVER 50 μ NICKEL
 NUT: NICKEL PLATED
 60 μ TO 100 μ OVER ALL
 ELECTRICAL
 RATED CURRENT: 4A
 RATED VOLTAGE: 250V
 INSULATION RESISTANCE: 100 M Ω hms MIN.
 CONTACT RESISTANCE: 10 m Ω hms MAX.
 WATER PROOF: IP67
 ENVIRONMENT
 OPERATION TEMPERATURE: -40°C TO +105°C
 MAX WIRE AWG: 22 AWG

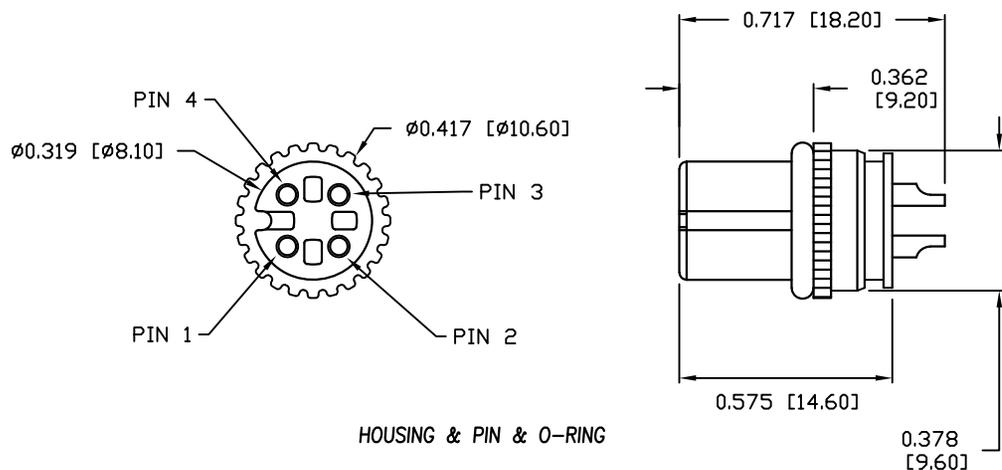

HOUSING & PIN & O-RING

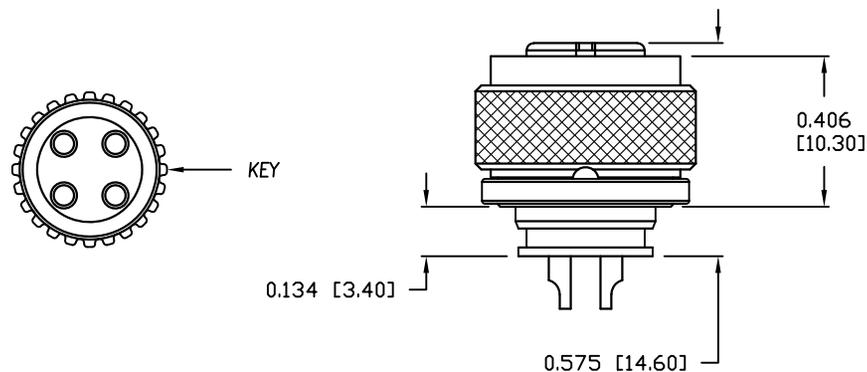

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

M. SIGMON

DATE:

08-04-16

NorComp

SCALE:

N.T.S.

SHEET OF

1 1

REV

2

DWG NO.

858VA04-203RLU4